

BI-DIRECTIONAL COUPLER

SURFACE MOUNT MODEL: SDCHP-125

WIDE BANDWIDTH



10 - 250 MHz

FEATURES:

- ▶ High Power Rating
- ▶ Low Insertion Loss
- ▶ Excellent Coupling Flatness
- ▶ High Directivity

APPLICATION:

- ▶ Antenna Signal Monitoring

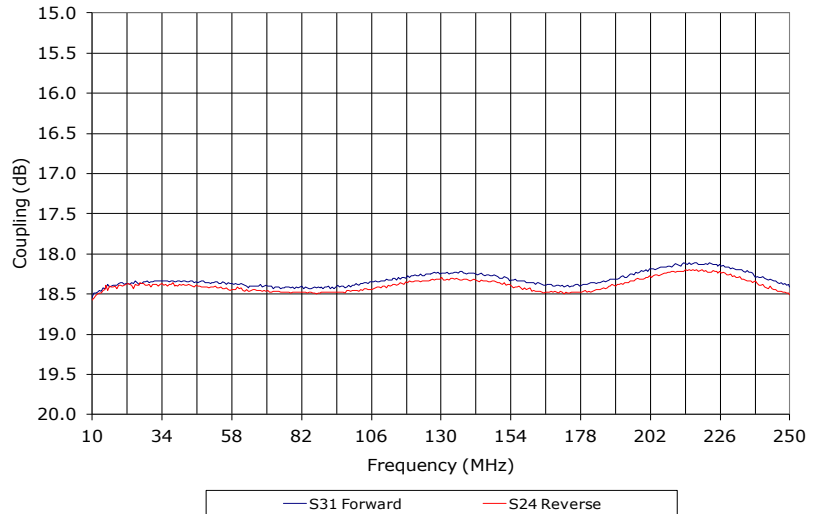

SPECIFICATIONS

Frequency	10 - 250 MHz		
Coupling	18.5 ±1.0 dB (Nom.)		
Coupling Flatness	±0.5 dB (Max.)		
Mainline Loss ¹	Freq. (MHz)	Typ.	Max.
	10 - 20	0.1	0.2
	20 - 125	0.15	0.3
Directivity (dB) ²	Freq. (MHz)	Typ.	Min.
	10 - 20	23	15
	20 - 125	25	20
125 - 250	24	19	
Input Power Rating ³	30 Watts (Avg.)		
Impedance	50 Ohms (Nom.)		
VSWR	1.3:1 (Typ.)		
Operating Temperature Range	-40 to +70 °C		
Storage Temperature Range	-55 to +100 °C		
¹ Including Coupling Loss. ² Directivity is the isolation value minus the coupling value. ³ For any load impedance connected to the output port.			

Package # 129LF-1

DETAIL - A

PACKAGE MOUNTING: SEE APPLICATION NOTE AN7301.
 TOLERANCES ON THREE DECIMAL PLACES= ± 0.015

PORT CONFIGURATION				
Input	Output	FWD. Coupled	REV. Coupled	Gnd.
1	6	3	4	All Others



BI-DIRECTIONAL COUPLER

SURFACE MOUNT MODEL: SDCHP-125

WIDE BANDWIDTH

10 - 250 MHz

PERFORMANCE PLOTS

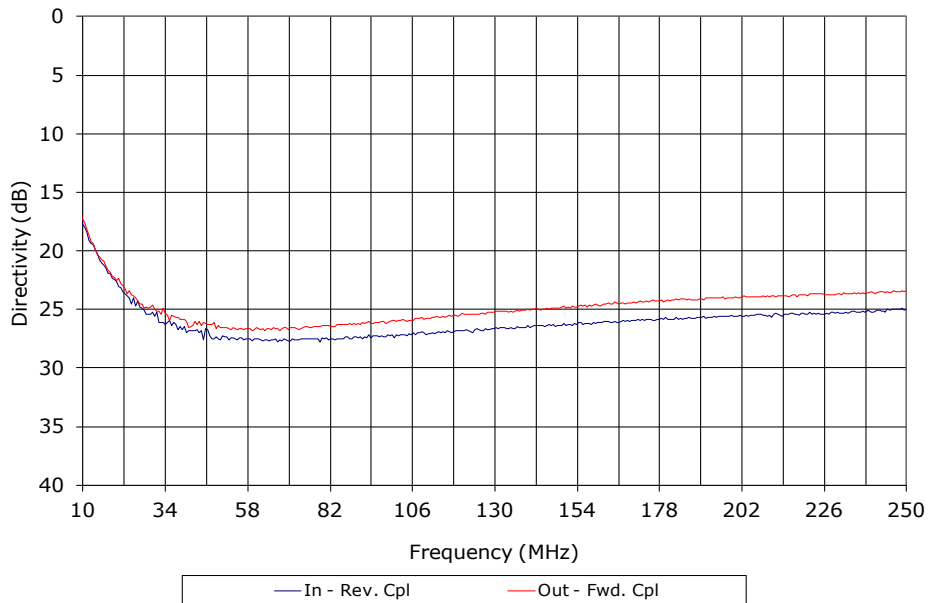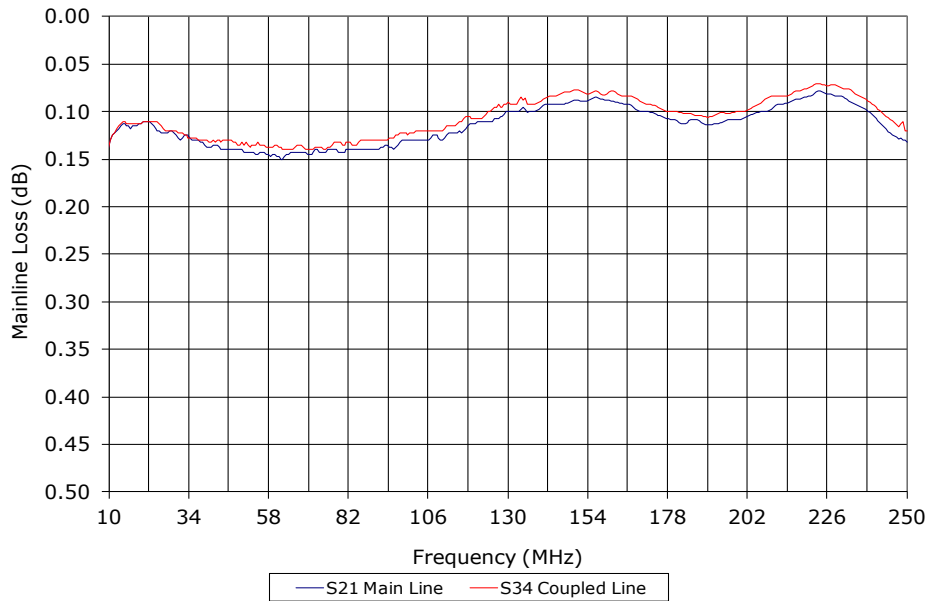

BI-DIRECTIONAL COUPLER

SURFACE MOUNT MODEL: SDCHP-125

WIDE BANDWIDTH

10 - 250 MHz

PERFORMANCE PLOTS

