


VOLTAGE CONTROLLED SAW OSCILLATOR

SURFACE MOUNT MODEL: HFSO1600-5L


1600 MHz

FEATURES:

- ▶ Exceptional Phase Noise Performance
- ▶ Small Size, Surface Mount
- ▶ Lead Free REL-PRO® Technology
- ▶ Buffered Output




Phase Noise

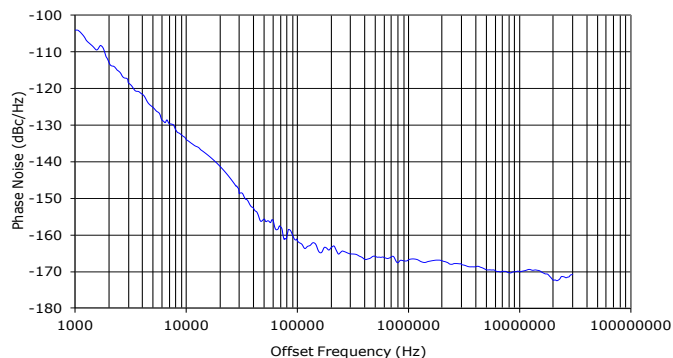

SPECIFICATIONS (Rev. B 03/10/17)

Frequency	1600 MHz						
Tuning Voltage	0.5 - 12 VDC						
Bias Voltage (Vcc)	+5 VDC ($\pm 5\%$) @ 100 mA (Max.)						
Output Power	+14 dBm (Min.)						
Tuning Sensitivity	38 kHz/V (Typ.)						
Thermal Drift	170 kHz (Typ.)						
Output Impedance	50 Ohms (Nom.)						
Harmonic Suppression	<table border="1"> <thead> <tr> <th></th><th>dBc (Typ.)</th></tr> </thead> <tbody> <tr> <td>2nd</td><td>23</td></tr> <tr> <td>3rd</td><td>18</td></tr> </tbody> </table>		dBc (Typ.)	2nd	23	3rd	18
	dBc (Typ.)						
2nd	23						
3rd	18						
Sub-Harmonic Suppression	23 dBc (Typ.)						
Frequency Pulling	15 kHz (Typ. @ 1.75:1 VSWR)						
Frequency Pushing	20 kHz/V (Typ.) Vcc $\pm 5\%$						
Tuning Port Capacitance	75 pF (Typ.)						
Phase Noise @ 25 °C	<table border="1"> <thead> <tr> <th>Offset</th><th>dBc/Hz (Typ.)</th></tr> </thead> <tbody> <tr> <td>@ 10 kHz</td><td>-133</td></tr> <tr> <td>@ 100 kHz</td><td>-161</td></tr> </tbody> </table>	Offset	dBc/Hz (Typ.)	@ 10 kHz	-133	@ 100 kHz	-161
Offset	dBc/Hz (Typ.)						
@ 10 kHz	-133						
@ 100 kHz	-161						
Operating Temperature Range	-20 to +70 °C						

Package # 320-1LF

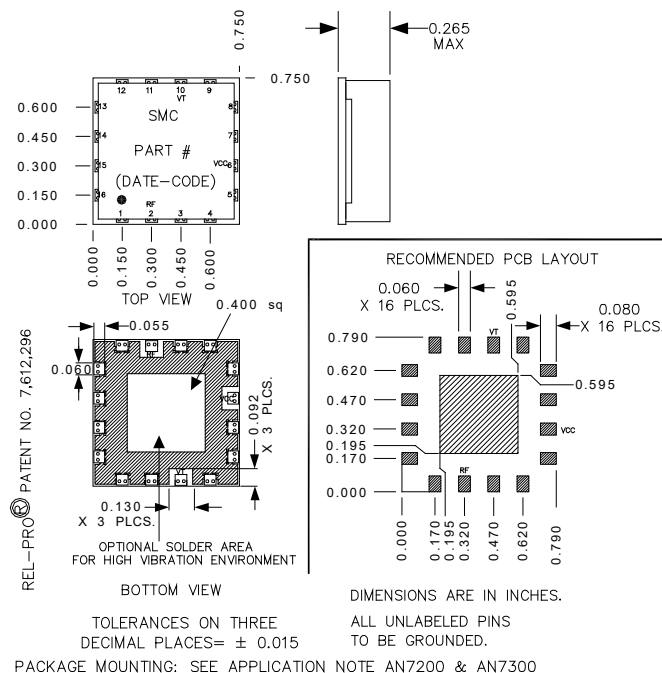

Absolute Maximum Ratings

Storage Temp. Range	-30 to +85 °C
Bias Voltage	+5.5 V
Tuning Voltage	+15 V
DC Voltage Applied to RF Out	± 25 V

Patent : <http://www.synergymwave.com/patents>

Copyright © Synergy Microwave Corporation
 201 McLean Boulevard • Paterson, New Jersey 07504 USA
 Tel: (973) 881-8800 • Fax: (973) 881-8361
 E-Mail: sales@synergymwave.com • Website: <http://www.synergymwave.com>
 Patents : <http://www.synergymwave.com/patents>





VOLTAGE CONTROLLED SAW OSCILLATOR

SURFACE MOUNT MODEL: HFSO1600-5L

1600 MHz

PERFORMANCE PLOTS

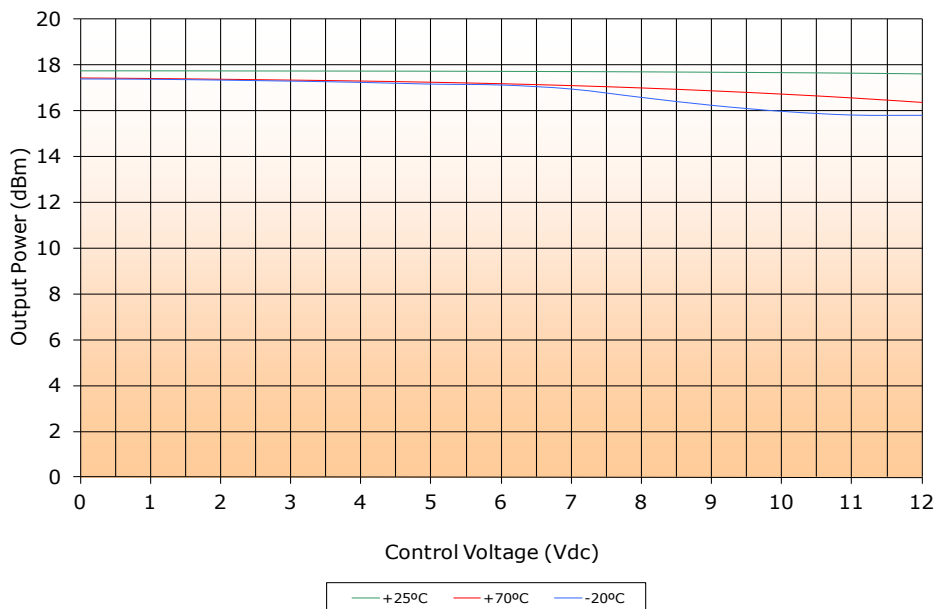
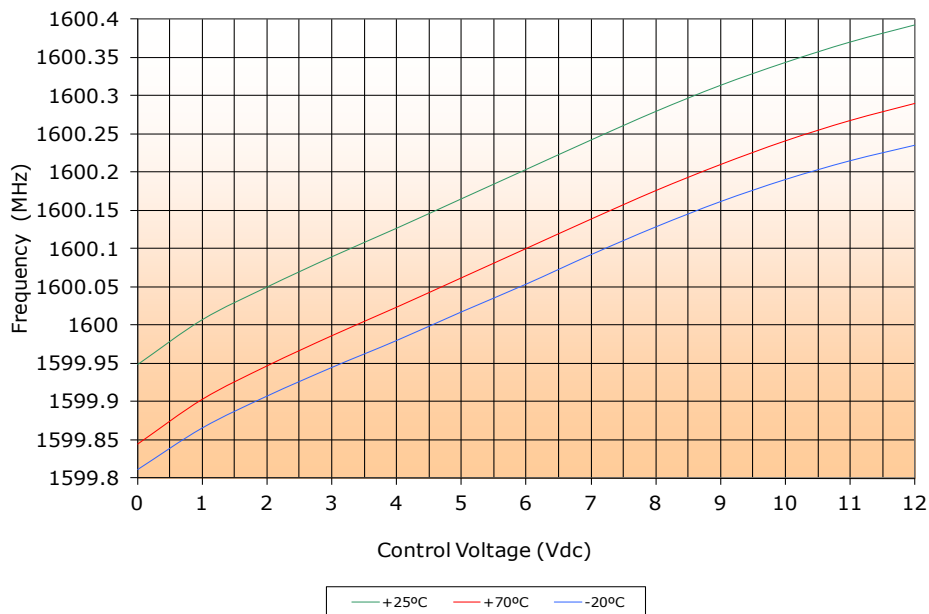


VOLTAGE CONTROLLED SAW OSCILLATOR

SURFACE MOUNT MODEL: HFSO1600-5L

1600 MHz


PERFORMANCE PLOTS

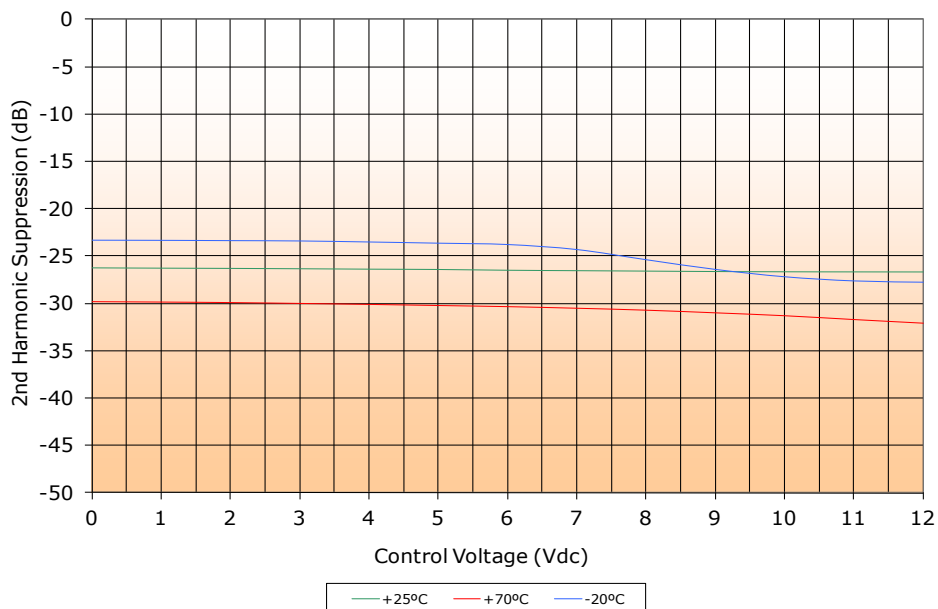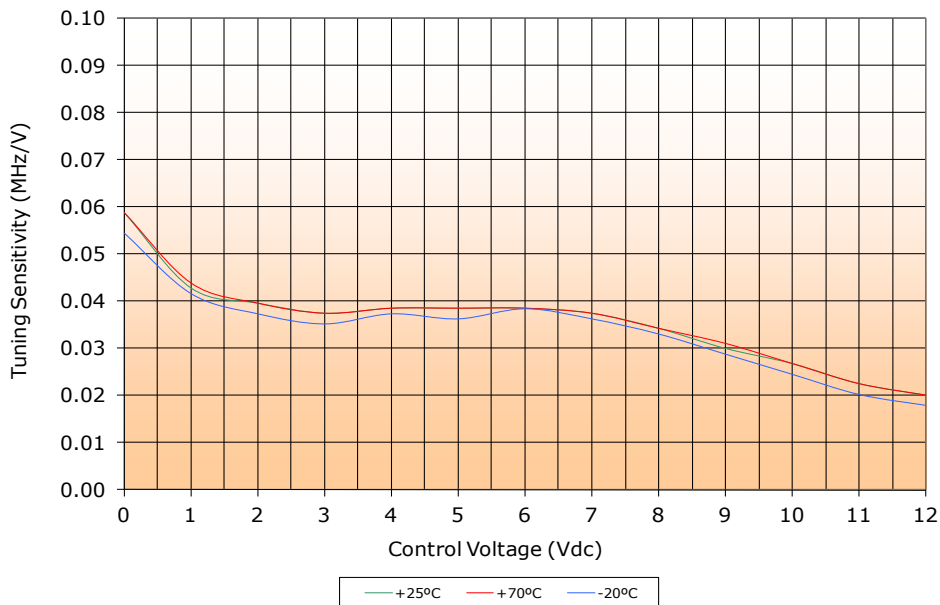

VOLTAGE CONTROLLED SAW OSCILLATOR

SURFACE MOUNT MODEL: HFSO1600-5L

1600 MHz

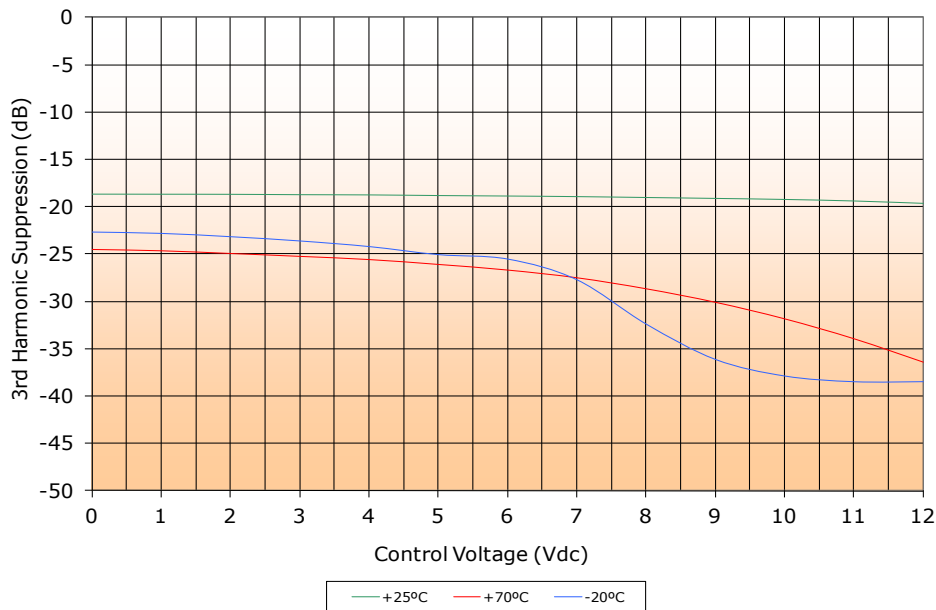

PERFORMANCE PLOTS