

## 200mW, 0.47V Schottky Barrier Diode

### FEATURES

- Designed for mounting on small surface
- Low Capacitance
- Low forward voltage drop
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21

### APPLICATIONS

- Adapters
- For switching power supply
- Low stored charge
- Inverter

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$I_{F(AV)}$	500	mA
$V_{RRM}$	30	V
$I_{FSM}$	5	A
$V_F$ at $I_F=500mA$	0.47	V
$T_J$ Max.	125	°C
Package	SOD-323F	
Configuration	Single dice	

### MECHANICAL DATA

- Case: SOD-323F
- Molding compound: UL flammability classification rating 94V-0
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte Au plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Polarity: Indicated by cathode band
- Weight: 4.85 mg (approximately)



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	PART NUMBER	UNIT
Marking code on the device		B3	
Repetitive peak reverse voltage	$V_{RRM}$	30	V
Forward current	$I_{F(AV)}$	200	mA
Non-repetitive peak forward surge current @ $t = 8.3ms$	$I_{FSM}$	5	A
Junction temperature range	$T_J$	-65 to +125	°C
Storage temperature range	$T_{STG}$	-65 to +125	°C

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	LIMIT	UNIT
Junction-to-ambient thermal resistance	$R_{\theta JA}$	426	°C/W

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)					
PARAMETER	CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode <sup>(1)</sup>	$I_F = 100\text{mA}, T_J = 25^\circ\text{C}$	$V_F$	--	0.36	V
	$I_F = 500\text{mA}, T_J = 25^\circ\text{C}$			0.47	
Reverse current @ rated $V_R$ per diode <sup>(2)</sup>	$V_R = 15\text{V}, T_J = 25^\circ\text{C}$	$I_R$	--	80	$\mu\text{A}$
	$V_R = 20\text{V}, T_J = 25^\circ\text{C}$			100	
	$V_R = 30\text{V}, T_J = 25^\circ\text{C}$			500	
Junction capacitance	1 MHz, $V_R = 0\text{V}$	$C_J$	--	160	$\rho\text{F}$

**Notes:**

1. Pulse test with  $PW = 0.3\text{ ms}$
2. Pulse test with  $PW = 30\text{ ms}$

<b>ORDERING INFORMATION</b>				
PART NO.	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
B0530WS (Note 1)	RR	G	SOD-323F	3K / 7" Reel

**Notes:**


1. Whole series with green compound

<b>EXAMPLE</b>				
EXAMPLE P/N	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
B0530WS RRG	B0530WS	RR	G	Green compound


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Typical Forward Characteristics**

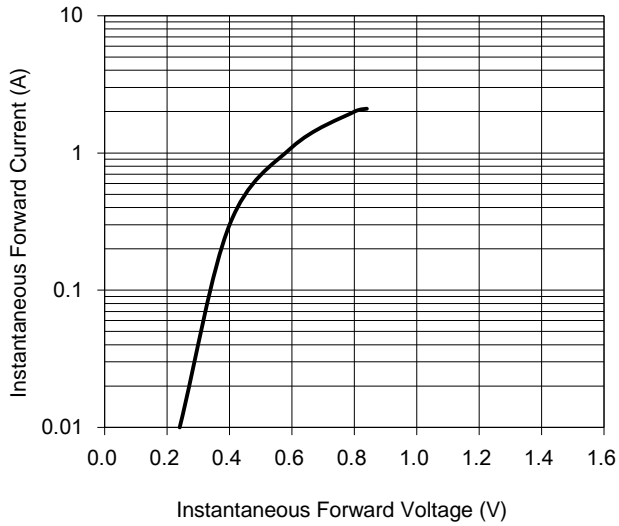


**Fig.2 Forward Current Derating Curve**

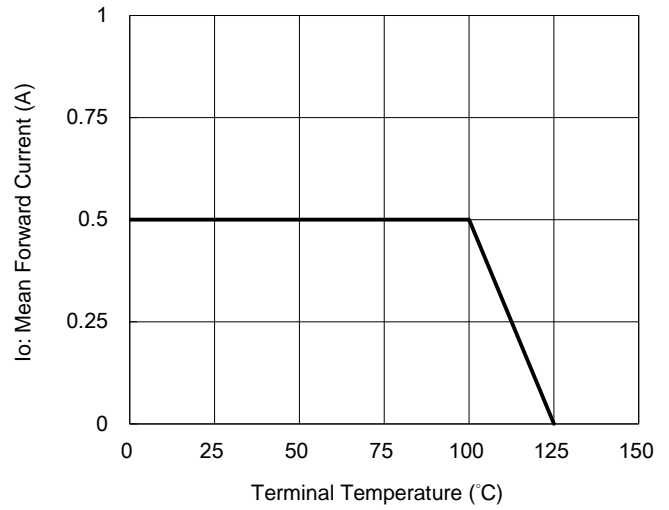

**Fig.3 Admissible Power Dissipation Curve**

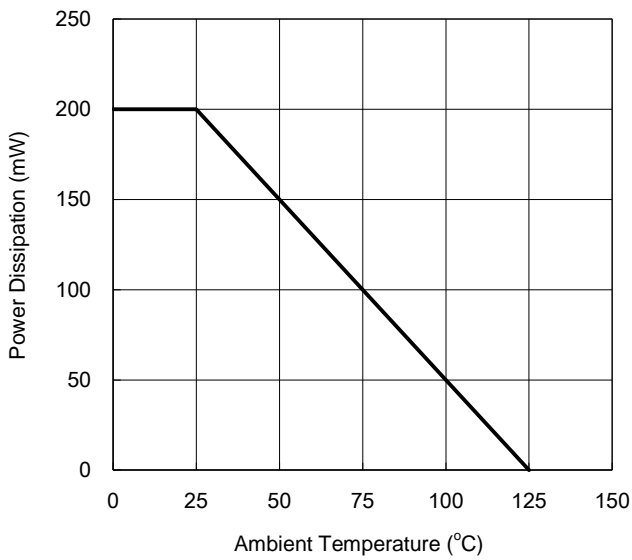


**Fig.4 Typical Junction Capacitance**

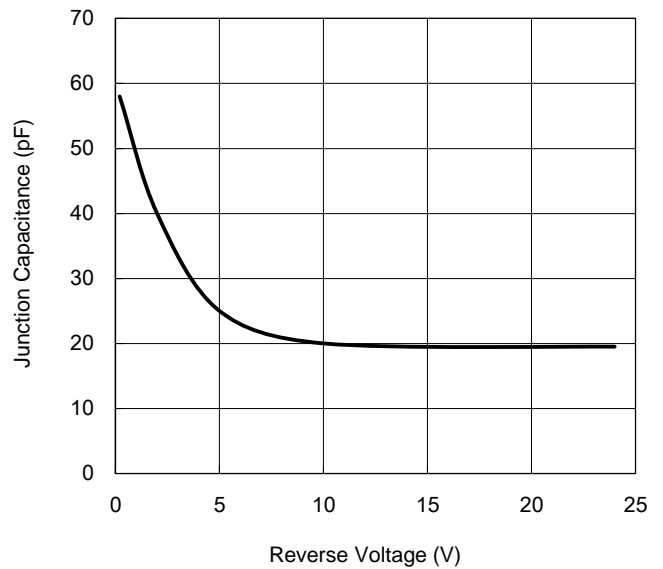


### CHARACTERISTICS CURVES

( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Fig.5 Typical Reverse Characteristics**

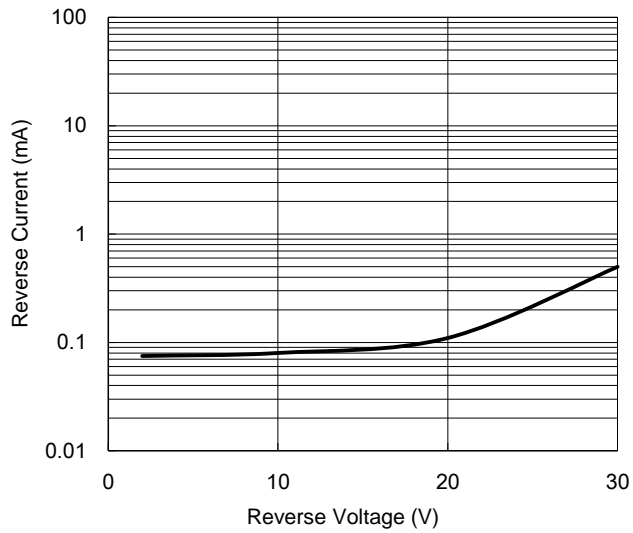

**PACKAGE OUTLINE DIMENSION**

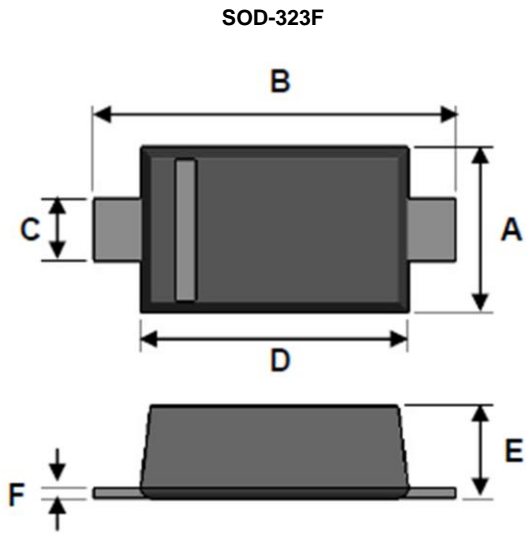

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	1.15	1.35	0.045	0.053
B	2.30	2.80	0.091	0.110
C	0.25	0.40	0.010	0.016
D	1.60	1.80	0.063	0.071
E	0.80	1.10	0.031	0.043
F	0.05	0.25	0.002	0.010

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.