

# 1-72 Fiber Micro Distribution with 2mm buffer tubes, Plenum



## Features and Benefits

- Ultra space-saving designs
- 250µm color-coded bare fiber
- 12 bare fibers per subunit up to 72 fiber constructions
- Available in all fiber types
- Meets the application requirement of National Electric Code (NEC) Article 770 and are OFNP-rated

## Description

The Light Connection 1-72 fiber Micro Distribution Cable is composed of a single tube or an optional central member, aramid yarn, an aramid ripcord, and a PVC outer jacket. Each sub-unit consists of 12 colored glass fibers surrounded by aramid yarn with a PVC jacket 2.00 mm in diameter. All component materials meet the EU RoHS and REACH Directive standards. Sub-units can be color-coded or sequentially numbered.



TLC Micro Distribution Cable is available in 12 TIA standard colors or special-order colors. UL Listed OFNP cables are available, and unlisted, unrated cable can be supplied to accommodate special needs. Standard surface print denotes construction, NEC rating and fiber type, and includes footage markers. Custom print can also be accommodated.

## Application

Plenum  
Data Centers

## Flame Rating

NFPA262

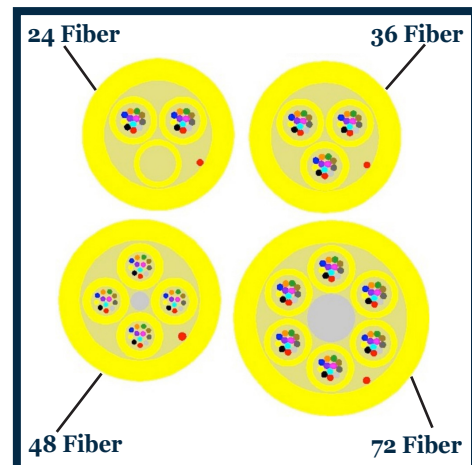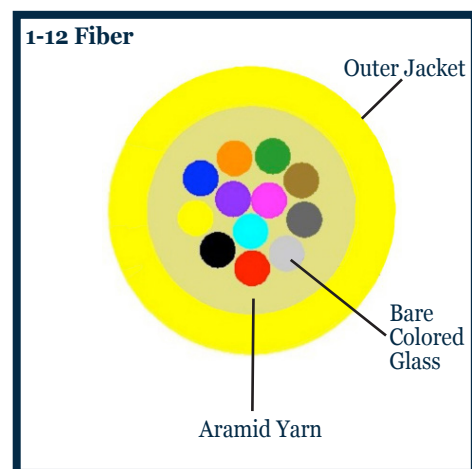

# SPECIFICATIONS

## Temperature Range

Storage Temperature	-40 C to +70 C
Operating Temperature	0 C to +70 C

## Cable Characteristics

Fiber Count	1-12, 24, 36, 48, 72
Outer Jacket Material	Flame Retardant PVC
Sub Units	Flame Retardant PVC
Strength Member	Aramid Yarn
Central Strength Member (if applicable)	Fiber Reinforced Rod

## Mechanical Characteristics

Mechanical Characteristics	Value
Nominal Outer Diameter (mm): 1-12, 24, 36, 48, 72 (fiber count)	2.0/ 6.3/ 6.3/ 6.6/ 8.0
Weight (lbs/ km): 1-12, 24, 36, 48, 72 (fiber count)	12.5/87.5/87.5/100/150
Minimum Bend Radius, Installation (cm) of 1-12, 24, 36, 48, 72 (fiber count)	4.0/ 12.6/ 12.6/ 13.2/ 16.0
Minimum Bend Radius, Operation (cm) of 1-12, 24, 36, 48, 72 (fiber count)	2.0/ 6.3/ 6.3/ 6.6/ 8.0

## Optical Characteristics

Items	Single Mode	OM1	OM2	OM3	OM4
Core Size	9 um	62.5 um	50 um	50 um	50 um
Wavelength	(1310/ 1550) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm	(850/ 1300) nm
Max. Attenuation	(0.5/ 0.4) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km	(3.5/ 1.5) dB/ km
Bandwidth (EMB) (High Performance)	–	220 MHz @850nm	850 MHz @850nm	2000 MHz @850nm	4700 MHz @850nm
Link Length (10Gb/ s)	–	–	150 mtr	300 mtr	550 mtr

## Part Numbers

Fiber Count	Single Mode	OM1	OM2	OM3	OM4
12	S09MD12**NPY20	M62MD12**NPO20	M50MD12**NPA20	M50MD12**NPA20	M50MD12**NPA20
24	S09MD24**NPY20	M62MD24**NPO20	M50MD24**NPA20	M50MD24**NPA-20	M50MD24**NPA20
36	S09MD36**NPY20	M62MD36**NPO20	M50MD36**NPA20	M50MD36**NPA20	M50MD36**NPA20
48	S09MD48**NPY20	M62MD48**NPO20	M50MD48**NPA20	M50MD48**NPA20	M50MD48**NPA20
72	S09MD72**NPY20	M62MD72**NPO20	M50MD72**NPA20	M50MD72**NPA20	M50MD72**NPA20

### Fiber Type (9/125)

Fiber Type (9/125)	**
SMF-28 Ultra	CZ
SMF28e+	C
ClearCurve XB	CB
ClearCurve LBL	C7
ClearCurve ZBL	CC

### Fiber Type (50/125)

Fiber Type (50/125)	**
ClearCurve OM2	C2
Clear Curve OM3	CG
ClearCurve OM4	C4

### Fiber Type (62.5/125)

Fiber Type (62.5/125)	**
InfiniCor 300	C3
InfiniCor 1000	C1



132 Base Road  
Oriskany, NY, 13424  
Phone: 315-736-7384  
Fax: 315-736-1927  
Toll free: 1-888-571-7111  
sales@thelightconnection.com  
www.thelightconnection.com