



A (IEEE 1394b 9M) B (IEEE 1394b 9M)



3 綠 GREEN
4 紅 RED
5
1 橙 ORANGE
2 藍 BLUE
9
6 黑 BLACK
8 白 WHITE
SHELL SHELL

NOTE:
CABLE LENGTH P/N
L=1000±30 1647
L=2000±50 1648

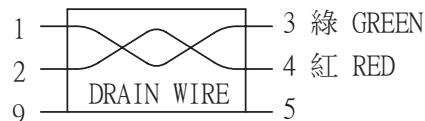

ITEM	DESCRIPTIONS	Q'TY
④	IEEE 1394b CABLE,UL20276 25AWG*2 TWISTED PAIRS+22AWG*2 CONDUCTORS,DOUBLE SHIELDED,PVC JACKET,COLOR:GRAY	1
③	METAL THUMB SCREW M3.0,NICKEL PLATED	4
②	PVC MOLDING HOUSING,COLOR:BLACK	2
①	IEEE 1394b BETA CONNECTOR,9 PIN,INSULATOR COLOR:BLACK	2

unibrain®			
IEEE 1394b 9P/ 1394b 9P CABLE		P/N	F301111B08-****805
		DWG	F301111B08 REV 1.2
CUSTOMER		UB	
CUSTOMER P/N		SEE NOTE	
		TOLERANCES: .X=±0.25 .XX=±0.05	
		SCALE: 1/1	UNIT:mm
		APPROVED	DATE
		C.P.LIU	22-JAN-10