

MYLAR SPEAKER



DIMENSIONS

MAGNET

NOMINAL IMPEDANCE

POWER RATING

LOWEST RESONANT FREQUENCY

OUTPUT SOUND PRESSURE LEVEL

(S.P.L.)

FREQUENCY RANGE

DISTORTION

OPERATING TEMP.RANGE

STORAGE TEMP. RANGE

WEIGHT

DIMENSIONS

UNIT: ±0.2mm

FREQUENCY RESPONSE CURVE

(DISTANCE:0.5m)

APPLICATIONS

- Handy Video Games
- Computer Peripherals
- Electric Dictionary
- Computer Modems
- Communication Equipments

USE40008G-01

Outer Diameter 40mm.

Baffle Opening 36.8mm

Materials : Rare Earth

Size : 12.5ø x 1.5mm

8Ω ± 15% At 900 Hz

Normal 200 mW/Max. 500mW

600 ± 150 Hz

82±3db / 0.2Watt./ 0.5Meter

Average at 1000,1200,1500,2000 Hz


350~11,000Hz Average SPL-10 db

5% Maximum At 600Hz. 200mW


-20°C ~+60°C

-30°C ~+70°C

6.0 gms



HOUSING MATERIAL : ABS

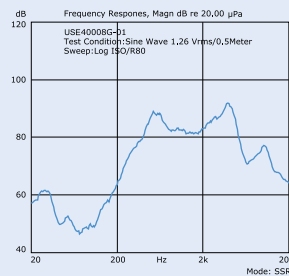

USE50008F-01

Outer Diameter 50mm.

Baffle Opening 45.5mm

Materials : Rare Earth

Size : 12.5ø x 1.5mm

8Ω ± 15% At 800 Hz

Normal 250 mW/Max. 500mW

500 ± 150 Hz

85±3db / 0.25Watt./ 0.5Meter

Average at 1000,1200,1500,2000 Hz


350~8,500Hz Average SPL-10 db

5% Maximum At 450Hz. 250mW

-20°C ~+60°C

-30°C ~+70°C

13.0 gms

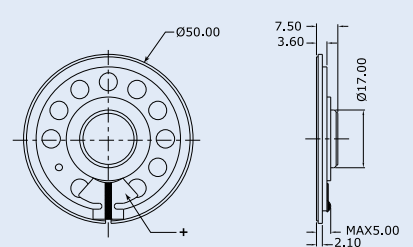

HOUSING MATERIAL : METAL

