


AC-PRO-MP^{TR} Trip Unit
with STR-58U setting

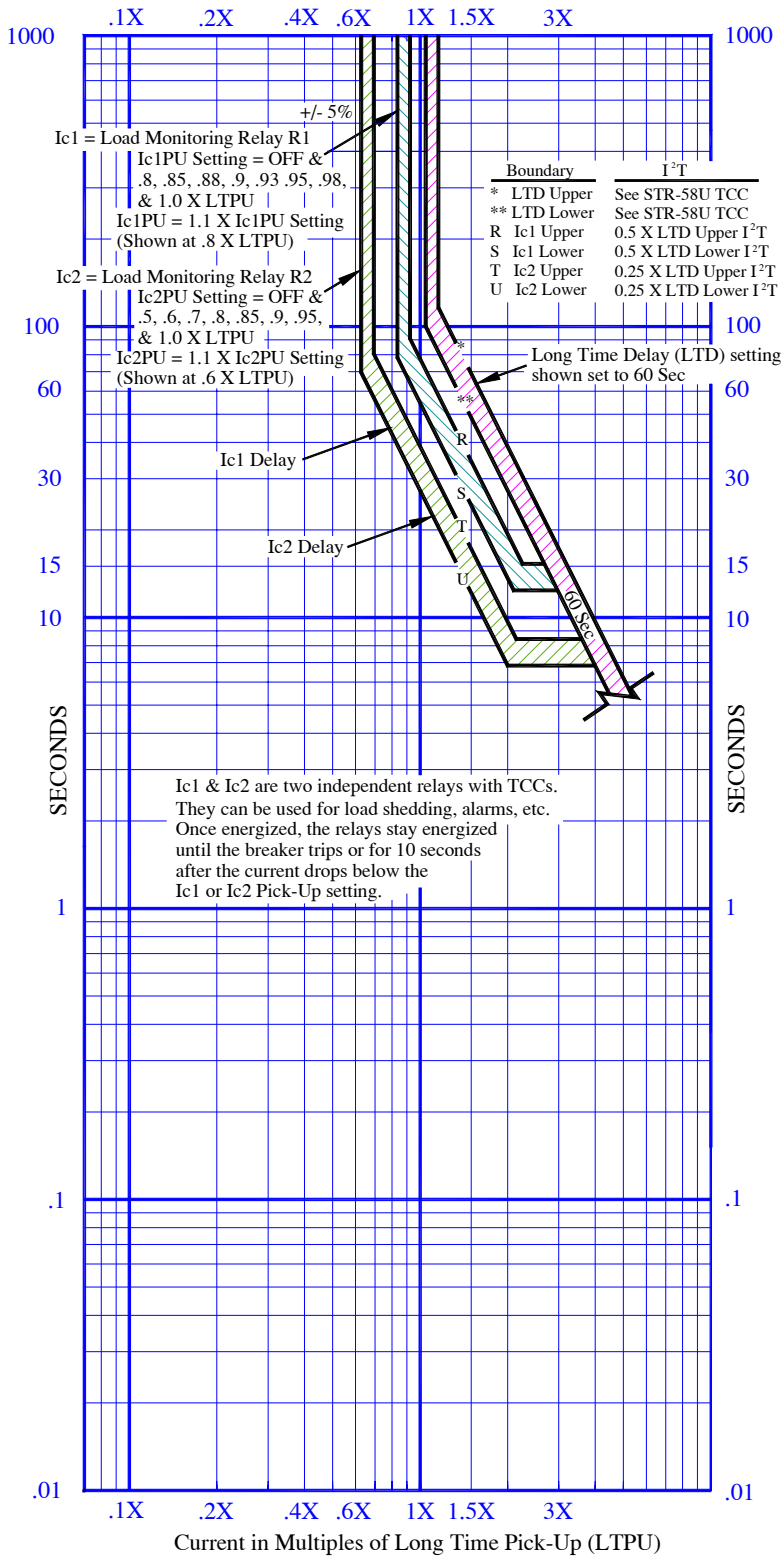

Ic1 & Ic2 are two independent relays with TCCs. They can be used for load shedding, alarms, etc. Once energized, the relays stay energized until the breaker trips or for 10 seconds after the current drops below the Ic1 or Ic2 Pick-Up setting.

Ic1 & Ic2 (Relays R1 & R2) Time Current Curve

Figure 10
AC-PRO-MPTM STR-58U Load Monitoring Time-Current-Curve