

Helping Customers Innovate, Improve & Grow



### Features

- Reflow Process Compatible
- Surface Mount package
- SC\_CUT Crystal
- Low Profile Compact Package (8.3mm)
- Standard Frequencies: 10; 12.8; 19.2; 20; 26; 30.72 Mhz

### Applications

- Base stations
- Test equipment
- Synthesizers
- Military communication equipment
- Digital Switching

## Performance Specifications


| Frequency Stabilities <sup>1</sup> (SC-Cut Crystal-Option - 10 to 40 MHz) |      |         |      |         |  |
|---|------|---------|------|---------|--|
| Parameter   | Min  | Typical | Max  | Units   | Condition  |
| vs. operating temperature range (referenced to +25°C)                     | -10  |         | +10  | ppb     | -20 to +70°C   |
|   | -10  |         | +10  | ppb     | -40 to +85°C   |
| Initial tolerance   | -0.2 |         | +0.2 | ppm     | at time of shipment, nominal EFC                       |
| vs. supply voltage change   | -5   |         | +5   | ppb     | V <sub>s</sub> ±5% static                              |
| vs. load change   | -5   |         | +5   | ppb     | Load ±5% static  |
| vs. aging / day   | -0.5 |         | +0.5 | ppb     | ≤10 Mhz after 30 days of operation                     |
| vs. aging / day   | -1   |         | +1   | ppb     | > 10 Mhz after 30 days of operation                    |
| vs. aging / year  | -60  |         | +60  | ppb     | ≤ 10 Mhz after 30 days of operation                    |
| vs. aging / year  | -100 |         | +100 | ppb     | > 10 Mhz after 30 days of operation                    |
| Holdover  |      |         |      |         |  |
| start up time   |      |         |      |         |  |
| Warm-up time  |      |         | 5    | minutes | to ±100ppb of final frequency (1 hour reading) @ +25°C |

## Performance Specifications


| Supply Voltage (Vs)             |                            |         |       |        |                                  |                                 |
|---------------------------------|----------------------------|---------|-------|--------|----------------------------------|---------------------------------|
| Parameter                       | Min                        | Typical | Max   | Units  | Condition                        |                                 |
| Supply voltage (standard)       | 3.135                      | 3.3     | 3.465 | VDC    |                                  |                                 |
|                                 | 4.75                       | 5.0     | 5.25  | VDC    |                                  |                                 |
| Power consumption               |                            |         | 3.1   | Watts  | during warm-up                   |                                 |
|                                 |                            |         | 1.5   | Watts  | steady state @ +25°C             |                                 |
| RF Output                       |                            |         |       |        |                                  |                                 |
| Signal [standard]               | HCMOS                      |         |       |        |                                  |                                 |
| Load                            |                            | 15      |       | pF     |                                  |                                 |
| Signal Level (Vol)              |                            |         | 0.4   | VDC    | with Vs=3.3V and 15pF Load       |                                 |
| Signal Level (Vol)              |                            |         | 0.5   |        | with Vs=5.0V & 12V and 15pF Load |                                 |
| Signal Level (Voh)              | 2.4                        |         |       | VDC    | with Vs=3.3V and 15pF Load       |                                 |
| Signal Level (Voh)              | 3.5                        |         |       |        | with Vs=5.0V & 12V and 15pF Load |                                 |
| Duty Cycle                      | 45                         |         | 55    | %      | @ (Voh-Vol)/2                    |                                 |
| Rise time                       |                            |         | 5     | ns     |                                  |                                 |
| Fall time                       |                            |         | 5     | ns     |                                  |                                 |
| Signal                          | Sine Wave                  |         |       |        |                                  |                                 |
| Load                            |                            | 50      |       | Ω      |                                  |                                 |
| Output Power @3,3V              | 2                          | 5       | 8     | dBm    | 50 Ω load                        |                                 |
| Output Power @ 5.0V             | 5                          | 8       | 11    | dBm    | 50 Ω load                        |                                 |
| Harmonics                       |                            |         | -30   | dBm    | 50 Ω load                        |                                 |
| Frequency Tuning (EFC)          |                            |         |       |        |                                  |                                 |
| Tuning Range                    | Fixed OCXO; No adjust      |         |       |        | Opti-<br>on <sup>5</sup>         |                                 |
|                                 | ±0.8                       |         | ±2.4  | ppm    |                                  | with SC cut crystal             |
| Linearity                       | 10%                        |         |       |        |                                  |                                 |
| Tuning Slope                    | Positive                   |         |       |        |                                  |                                 |
| Control Voltage Range           | 0.0                        | 1.4     | 2.8   | VDC    | with Vs=3.3V                     |                                 |
|                                 | 0.0                        | 2.0     | 4.0   | VDC    | with Vs=5.0V                     |                                 |
| modulation                      |                            |         |       |        |                                  |                                 |
| Reference Voltage Output (Vref) |                            |         |       |        |                                  |                                 |
| Reference Voltage               | 2.75                       | 2.8     | 2.85  | VDC    | with Vs = 3.3 VDC                |                                 |
|                                 | 3.92                       | 4.0     | 4.08  | VDC    | with Vs = 5.0 VDC                |                                 |
| Additional Parameters           |                            |         |       |        |                                  |                                 |
| Phase Noise <sup>3</sup>        |                            | -80     | -70   | dBc/Hz | 1 Hz                             | @<br>30.72MHz<br>with SC<br>Cut |
|                                 |                            | -110    | -105  | dBc/Hz | 10 Hz                            |                                 |
|                                 |                            | -138    | -130  | dBc/Hz | 100 Hz                           |                                 |
|                                 |                            | -148    | -140  | dBc/Hz | 1 kHz                            |                                 |
|                                 |                            | -152    | -145  | dBc/Hz | 10 kHz                           |                                 |
| Phase Noise <sup>3</sup>        |                            | -90     | -80   | dBc/Hz | 1 Hz                             | @ 20MHz<br>with SC<br>Cut       |
|                                 |                            | -120    | -110  | dBc/Hz | 10 Hz                            |                                 |
|                                 |                            | -140    | -135  | dBc/Hz | 100 Hz                           |                                 |
|                                 |                            | -148    | -145  | dBc/Hz | 1 kHz                            |                                 |
|                                 |                            | -152    | -145  | dBc/Hz | 10 kHz                           |                                 |
| Weight                          |                            |         | 10    | g      |                                  |                                 |
| Processing & Packing            | Handling & Processing Note |         |       |        |                                  |                                 |

| Absolute Maximum Ratings   |     |  |     |    |                      |
|----------------------------|-----|--|-----|----|----------------------|
| supply voltage (Vs)        |     |  | 5.5 | V  | with Vs=3.3 & 5.0VDC |
| Output Load                |     |  | 50  | pF |                      |
| Operable Temperature Range | -45 |  | +85 | °C |                      |
| Storage Temperature Range  | -45 |  | +85 | °C |                      |

## Outline Drawing / Enclosure

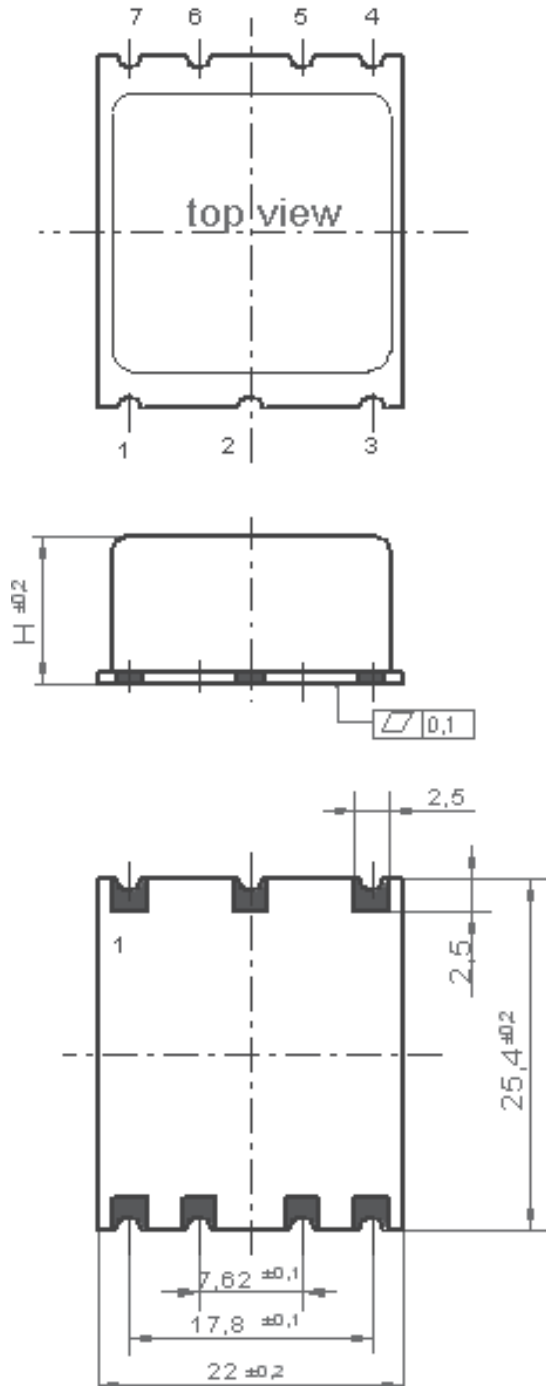

| OX-220     |                |
|------------|----------------|
| Height "H" | cover material |
| 12.1       | plastic        |
| 8.5        | plastic        |

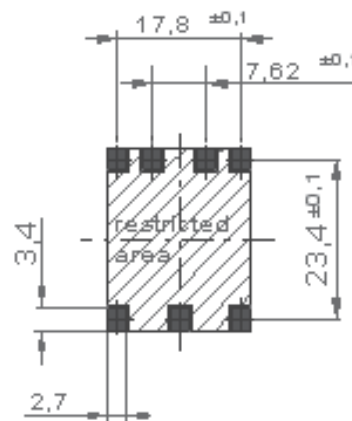


Padvorschlag  
land pattern  
recommendation

| Pin Connections |  |
|-----------------|--|
| 1               | Electronic Frequency Control Input (EFC) |
| 2               | Reference Voltage output                 |
| 3               | Supply Voltage Input (Vs)                |
| 4               | RF Output                                |
| 5               | Oven Alarm                               |
| 6               | N.C or Option (must remain un connected) |
| 7               | Ground (Case)                            |

Dimensions in mm

## Standard Shipping Method (OX-220 / OX -221)

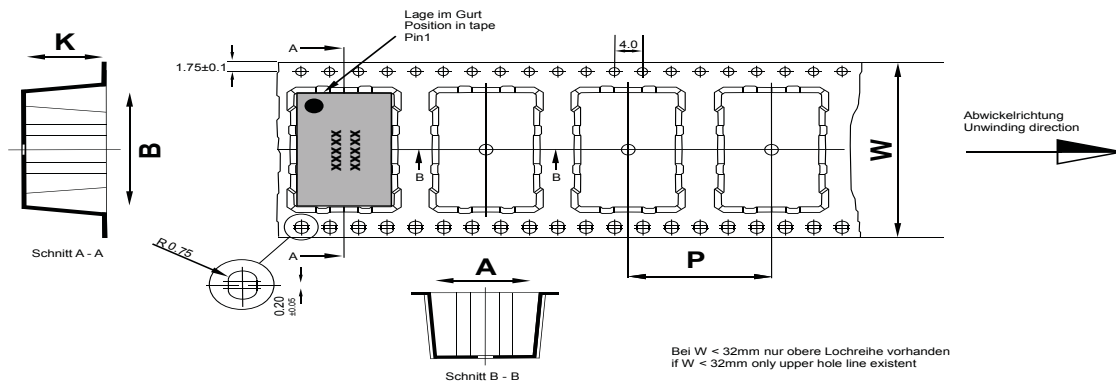

|  |  |
|--|--|
| Maßangaben in mm:<br>A, B und K Maße von Bauelement abhängig<br>Fertigungstoleranzen entsprechen der DIN IEC 286-3 | Dimension in mm:<br>A, B und K are dependent upon component dimensions<br>production tolerance complying DIN IEC 286-3 |
|--|--|

All dimensions in millimeters unless otherwise stated

| Enclosure Type   | Tape Width W (mm) | Quantity per meter | Quantity per reel | Dimension P |
|------------------|-------------------|--------------------|-------------------|-------------|
| OX-2201 (12.1mm) | 44                | 37.5               | 175               | 28          |
| OX-2206 (8.5mm)  | 44                | 37.5               | 250               | 28          |

## Recommended Reflow Profile

IPC/JEDEC J-STD-020 (latest revision)

Additional Information:

This SMD oscillator has been designed for pick and place reflow soldering.


SMD oscillators must be on the top side of the PCB during the reflow process.

## Additional Environmental Conditions

| Parameter                 | Description   |
|---------------------------|---|
| Rapid temperature changes | MIL-883-1010 Cond B 1000 cycles -55/125C  |
| Vibration                 | MIL-STD-883 Meth 2007 Cond A 20G 20-2000Hz 4x in each 3axis 4 min   |
| Shock                     | Mech.Shock MIL-STD-202 Meth 213 Cond.C 100G 6ms 6 shocks in each direction  |
| Solderability             | J_STD_002C Cond A, Through hole device/ Cond. B, SMD 255C (diving time 50,5sec.) Dip+Look with 8h damp pre-treatment: solder wetting >95% |
| Solvent resistance        | MIL-STD-883 Meth 2015 Solv. 1,3,4   |
| ESD                       | HBM JESD22-A114-F Class 1C 10* 1000V  |
| Moisture Sensit.          | Level 1 JESD22-A113-B   |
| RoHS compliance           | 100% RoHS 6 compliant   |
| Washable                  | non-washable device   |

**Note:** All temperatures refer to topside of the package, measured on the package body surface.

## Ordering Information

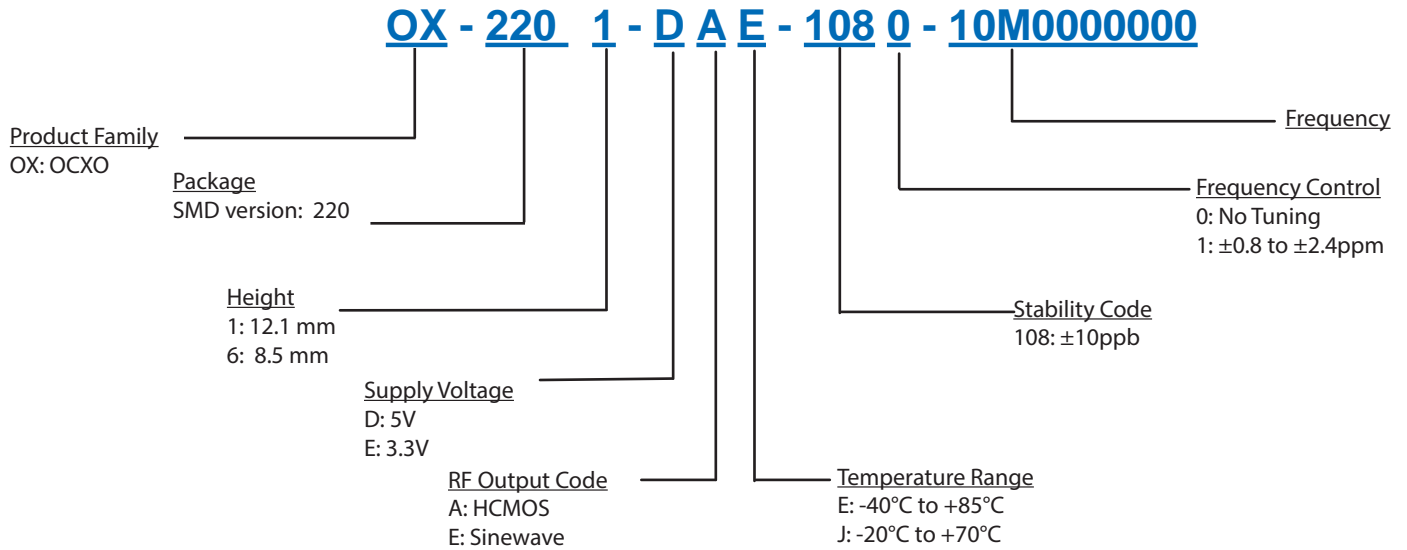

**Notes:**

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

## For Additional Information, Please Contact

**USA:**

Vectron International  
267 Lowell Road  
Suite 102  
Hudson, NH 03051  
Tel: 1.888.328.7661  
Fax: 1.888.329.8328

**Europe:**

Vectron International  
Landstrasse, D-74924  
Neckarbischofsheim, Germany  
Tel: +49 (0) 7268.801.100  
Fax: +49 (0) 7268.801.282

**Asia:**

Vectron International  
68 Yin Cheng Road(C), 22nd Floor  
One LuJiaZui  
Pudong, Shanghai 200120, China  
Tel: +86 21 6194 6886  
Fax: +86 21 6194 6699

**Disclaimer**

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 16.01.2015