

Integra® Plus

Ducted MVHR Unit



Features & Benefits

- Powered heat recovery unit for larger residential or commercial applications
- Up to 70% heat recovery
- Low power consumption
- Effective condensation control
- 3 speed control

Easy Installation

The Vent-Axia Integra Plus is designed for mounting in ceiling voids, lofts and above a suspended ceiling. Four 150mm spigots are provided for simple connection to insulated flexible or rigid ventilation ducting. The unit comes complete with a 22mm condensate outlet.


Model

Integra Plus
Stock Ref
437666


Dimensions (mm)

A	B	C	D	E	F	G	H	J	K
603	150	100	580	125	350	125	355	125	305

Weight: 15.5kg fan box, 5kg controller

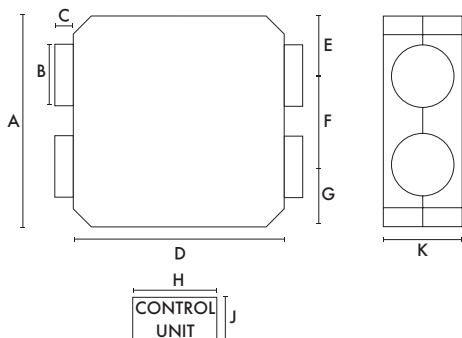

Performance

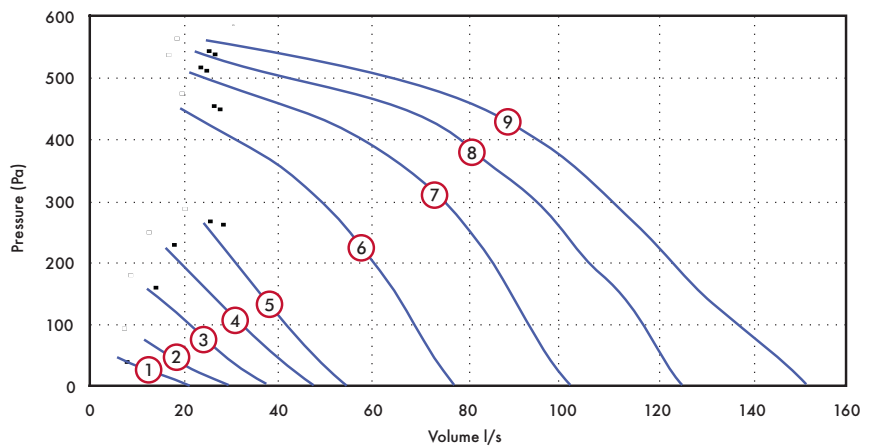


Motor Speed/ Curve	Volume (l/s) (FID)	Wattage (W)	Voltage (V)	dB(A) @ 3m
1	22	30	50	19.2
2	30	45	62	19.5
3	38	66	74	20.9
4	48	85	86	21.9
5	55	115	98	24.5
6	78	188	130	30.8
7	102	262	160	34.3
8	128	330	190	36.9
9	154	425	230	39.2

Controllers & Sensors

Trickle Boost Switch	Ambient Response Humidistat	Visionex PIR
455213	563550	459623
TIM2	3 Position Switch	
370346	5108454	

Units supplied complete with transformer

Airflow Direction

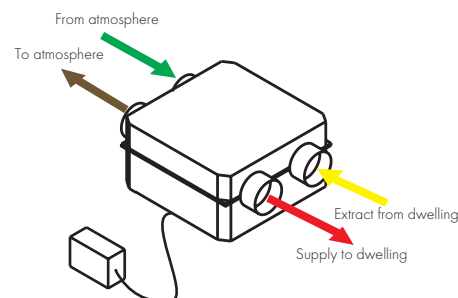

SEC Rating

Model	SEC Class	SEC Class (inc. LDC)
Integra Plus	E	B