

FEATURES

- 15 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 3A
- STANDARD 2.0 X 1.6 X 0.4 INCH PACKAGE
- HIGH EFFICIENCY UP TO 82%
- 4:1 WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

DESCRIPTION

The MT15D series offer 15 watts of output power from a 2 x 1.6 x 0.4 inch package. The MT15D series have 4:1 wide input voltage of 9-36 and 18-75VDC. The MT15D features 1600VDC of isolation, short-circuit and over-voltage protection.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted


OUTPUT SPECIFICATIONS			INPUT SPECIFICATIONS		
Output power	15 Watts, max.		Input voltage range	24V nominal input 48V nominal input	9 – 36VDC 18 – 75VDC
Voltage accuracy	Full load and nominal Vin	± 1%	Input filter		Pi type
Minimum load (Note 6)		See Table	Input surge voltage	24V input 100mS max	50VDC 100VDC
Voltage adjustability		± 10%	Input reflected ripple current	Nominal Vin and full load	20mA _{p-p}
Line regulation	LL to HL at Full Load	± 0.2%	Start up time	Nominal Vin and constant resistive load	Power up 20mS, typ.
Load regulation	Min. load to Full load	Single Dual	Remote ON/OFF (Note 7)	DC-DC ON DC-DC OFF	Open or 3.5V < Vr < 12V Short or 0V < Vr < 1.2V
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL	± 5%	Input current of remote control pin	Nominal Vin	-0.5mA~+0.5mA
Ripple and noise	20MHz bandwidth	See table	Remote off state input current	Nominal Vin	20mA
Temperature coefficient		±0.02% / °C, max.	ENVIRONMENTAL SPECIFICATIONS		
Transient response recovery time	25% load step change	250µS	Operating ambient temperature	-40°C ~ +85°C (with derating)	
Over voltage protection	5V output 12V output Zener diode clamp	6.2VDC 15VDC 18VDC	Maximum case temperature	100°C	
Over load protection	% of FL at nominal input	150%, max.	Storage temperature range	-55°C ~ +105°C	
Short circuit protection		Hiccup, automatics recovery	Thermal impedance (Note 8)	Nature convection Nature convection with heat-sink	10°C/Watt 8.24°C/Watt
GENERAL SPECIFICATIONS					
Efficiency		See table	Thermal shock	MIL-STD-810F	
Isolation voltage		1600VDC, min.	Vibration	MIL-STD-810F	
Isolation resistance		10 ⁹ ohms, min.	Relative humidity	5% to 95% RH	
Isolation capacitance		300pF, max.	EMC CHARACTERISTICS		
Switching frequency		270KHz, typ.	EMI	EN55022	
Case material		Nickel-coated copper	ESD	EN61000-4-2	Air ± 8KV Contact ± 6KV
Base material		Non-conductive black plastic	Radiated immunity	EN61000-4-3	Perf. Criteria B
Potting material		Epoxy (UL94-V0)	Fast transient (Note 9)	EN61000-4-4	10 V/m
Dimensions		2.00 X 1.60 X 0.40 Inch (50.8 X 40.6 X 10.2 mm)	Surge (Note 9)	EN61000-4-5	Perf. Criteria A
Weight		48g (1.69oz)	Conducted immunity	EN61000-4-6	± 2KV
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	2.041 x 10 ⁶ hrs 9.140 x 10 ⁵ hrs			Perf. Criteria B

Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor Load max ⁽⁵⁾
			Min. load	Full load		No load ⁽³⁾	Full load ⁽²⁾		
MT15D-2405SI	9 – 36 VDC	5 VDC	210mA	3000mA	75mVp-p	20mA	822mA	80	6800µF
MT15-2412SI	9 – 36 VDC	12 VDC	100mA	1250mA	75mVp-p	10mA	801mA	82	890µF
MT15D-2415SI	9 – 36 VDC	15 VDC	80mA	1000mA	75mVp-p	20mA	801mA	82	570µF
MT15D-2405WI	9 – 36 VDC	± 5 VDC	± 105mA	± 1500mA	75mVp-p	20mA	822mA	80	± 1700µF
MT15D-2412WI	9 – 36 VDC	± 12 VDC	± 50mA	± 625mA	75mVp-p	20mA	801mA	82	± 300µF
MT15D-2415WI	9 – 36 VDC	± 15 VDC	± 40mA	± 500mA	75mVp-p	20mA	801mA	82	± 200µF
MT15D-4805SI	18 – 75 VDC	5 VDC	210mA	3000mA	75mVp-p	15mA	411mA	80	6800µF
MT15D-4812SI	18 – 75 VDC	12 VDC	100mA	1250mA	75mVp-p	15mA	401mA	82	890µF
MT15D-4815SI	18 – 75 VDC	15 VDC	80mA	1000mA	75mVp-p	10mA	401mA	82	570µF
MT15D-4805WI	18 – 75 VDC	± 5 VDC	± 105mA	± 1500mA	75mVp-p	10mA	411mA	80	± 1700µF
MT15D-4812WI	18 – 75 VDC	± 12 VDC	± 50mA	± 625mA	75mVp-p	20mA	401mA	82	± 300µF
MT15D-4815WI	18 – 75 VDC	± 15 VDC	± 40mA	± 500mA	75mVp-p	15mA	401mA	82	± 200µF

Note

1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40°C.
2. Maximum value at nominal input voltage and full load.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
7. The ON/OFF control pin voltage is reference to -Vin.
8. Heat-sink is optional and P/N: 7G-0011C-F.
9. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Kaga USA suggest: Nippon chemi-con KY series, 220µF /100V, ESR 48mΩ.

PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
4	CTRL	CTRL
5	NO PIN	+ OUTPUT
6	+ OUTPUT	COMMON
7	- OUTPUT	- OUTPUT
8	TRIM	TRIM

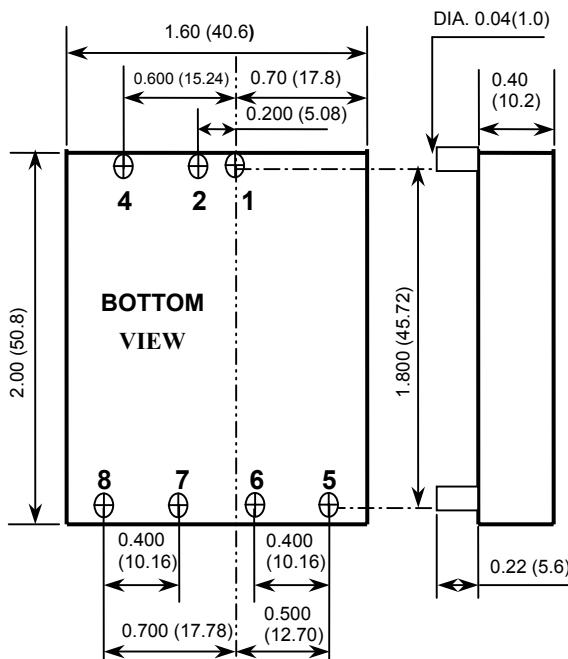

1. All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)