


METRIC COTTER PINS

SIZE	STD. PACK QTY	WT PER 1000
1.2	8	1000
	12	1000
	25	1000
1.6	10	1000
	12	1000
	14	1000
	20	1000
	25	1000
	32	1000
2	14	1000
	16	1000
	20	1000
	25	1000
	32	1000
	40	1000
2.5	14	1000
	16	1000
	20	1000
	25	1000
	32	1000
	40	1000
3.2	16	1000
	20	1000
	25	1000
	28	1000
	32	1000
	40	1000
4	25	1000
	32	500
	40	500
	45	500
	50	500
	63	500

Nominal Diameter	Shank Diam.		Wire Width		Head Dia.	Extended Prong Length	Hole Diam. +/- .03
	"A"		"B"		"C"	"D"	
	Max.	Min.	Max.	Min.	Min.	Min.	
1.2	1.0	0.9	1.0	0.8	1.7	1.2	1.20
1.6	1.4	1.3	1.4	1.1	2.4	1.2	1.60
2.0	1.8	1.7	1.8	1.4	3.2	1.2	2.00
2.5	2.3	2.1	2.3	1.7	4.0	1.2	2.50
3.2	2.9	2.7	2.9	2.2	5.1	1.6	3.20
4.0	3.7	3.5	3.7	2.8	6.5	2.0	4.00
5.0	4.6	4.4	4.6	3.5	8.0	2.0	5.00
6.3	5.9	5.7	5.9	4.6	10.3	2.0	6.30
8.0	7.5	7.3	7.5	5.9	13.1	2.0	8.00

MEETS ASME B18.8.6M SPECIFICATIONS

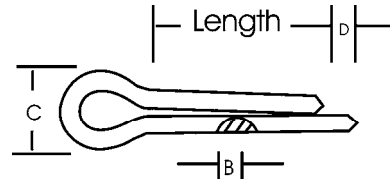

SIZE	STD. PACK QTY	WT PER 1000
5	32	1000
	40	500
	45	500
	50	500
6.3	50	500
	63	500
	80	250
	90	250
8	50	250
	63	200
	80	BULK
	90	BULK

Available in Plain and Zinc Yellow

WEDGE-FAST COTTERS

ALL SIZES PACKED 100 PCS. PER BOX
PLAIN FINISH

COTTER SIZE	HOLE SIZE	RECOMMENDED SHAFT DIAMETER		WT. PER 1000
		MIN.	MAX.	
5/16	2	3/8	3/4	63
	2-1/2	3/8	1	68
	3	3/8	1-5/16	76
	3-1/2	3/8	1-5/16	88
3/8	2-1/2	7/16	1	100
	3	7/16	1-5/16	111

Length of cotter pin is measured from under head to end of leg.

