




## BNCF/FBH 75 Ohm BNC Female Feed-Thru Panel Mount Connector

### Specifications

Impedance	75 Ohm
Frequency Range	DC – 3.0 GHz
Insertion Loss	< .1 dB @ 1 GHz
Mating style	2-Stud bayonet lock
Current Rating	2 Amps
Working Voltage	< 300 vrms
Center Conductor Contact plating	> .00003" Gold on Beryllium Copper
Body Material	Brass
Body Plating	Nickel
RFI	> 100 dB



### Spectrum Analyzer plot data

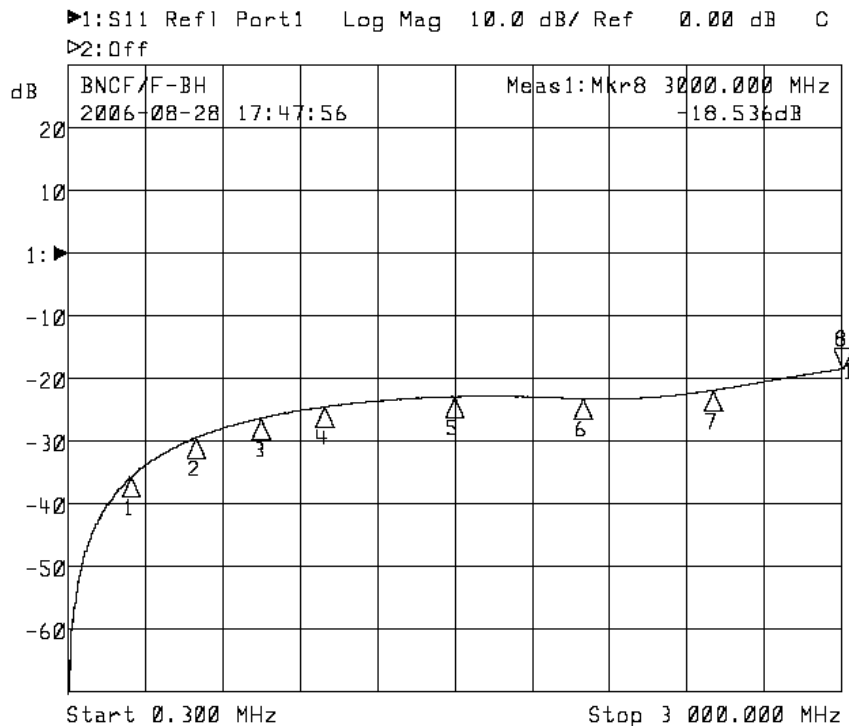

1: Mkr (MHz)	dB	2: Mkr (MHz)	dB
1: 250.0000	-35.712		
2: 500.0000	-29.520		
3: 750.0000	-26.392		
4: 1000.0000	-24.591		
5: 1500.0000	-22.980		
6: 2000.0000	-23.295		
7: 2500.0000	-21.962		
8: 3000.0000	-18.536		