

fasis WTP – DIN rail terminal blocks with **push-in connection**



Terminate wires easily, directly and without tools!

fasis WTP – DIN rail terminal blocks with push-in connection. Built according to an effective and comprehensive concept, including compact design and high-performance contact technology, **fasis** WTP reduces installation time and keeps inventory costs to a minimum.

The product line includes feed-through and ground blocks with 2, 3 or 4 termination points, as well as multi-tier blocks.

fasis WTP has been designed for use in machinery and plant engineering, as well as power distribution for buildings.


Connection cross-sections up to 10 mm² (8AWG)
Rated current of up to 57 A (41A UL/CSA)
Rated voltage of up to 1000 V (600V UL/CSA)

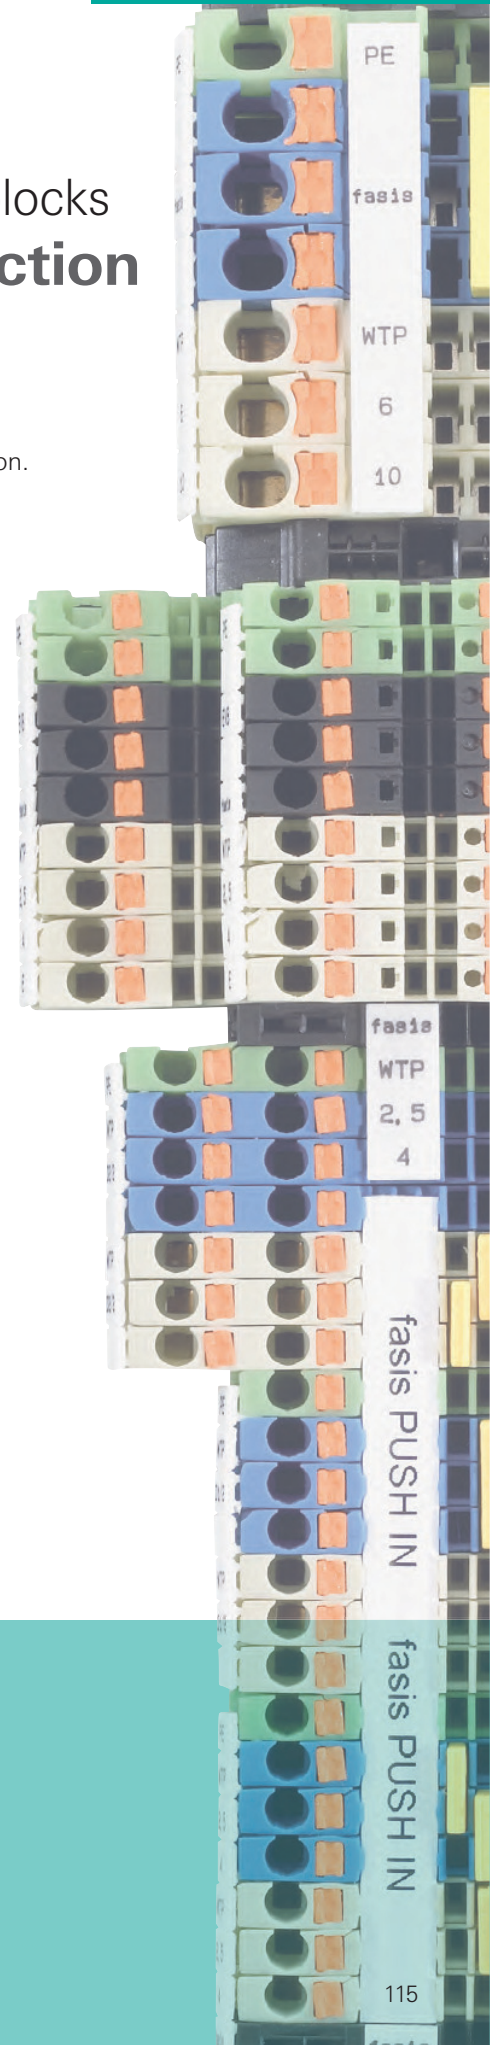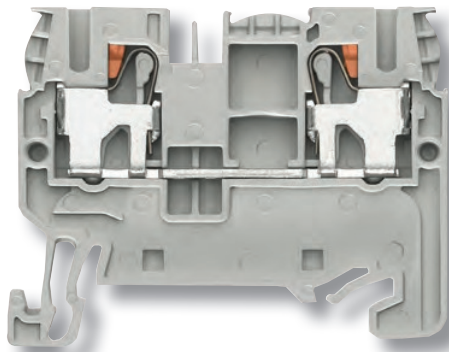

fasis WTP – wires simply push-in

Connect without tools



- Push-in connection
- Wires connect directly

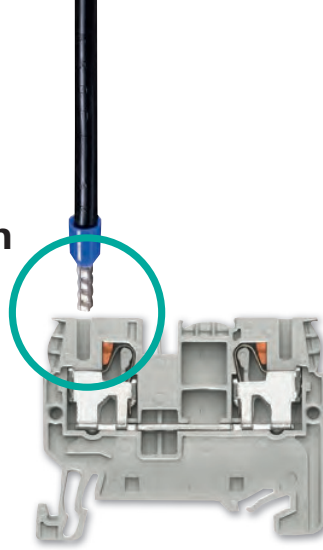

| fasis push-in (UL/CSA) | | |
|-------------------------------|-------------------|-----------------|
| Nominal cross section | 24-12 / 22-12 AWG | 12-8AWG |
| Rated current | 30 A | 41 A |
| Width | 5 mm | 8 mm |
| | ⇩ | ⇩ |
| | WTP 2,5/4 | WTP 6/10 |

Integrated release lever

- No mix-up of wire-entry and screwdriver entry points
- No contact with live parts
- Use of Philips head screwdriver also possible

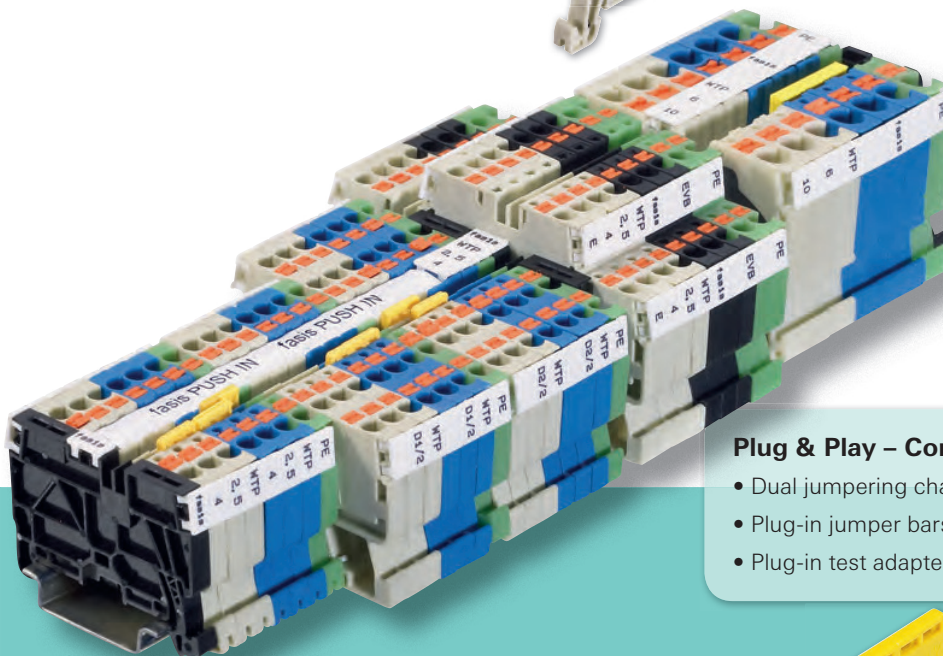
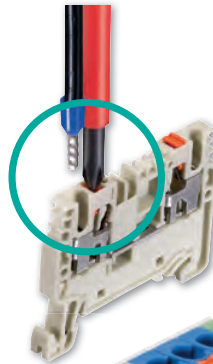


Plug & Play – Completing the Concept

- Dual jumpering channels
- Plug-in jumper bars
- Plug-in test adapter



Wieland jumpering system – Perfect technology

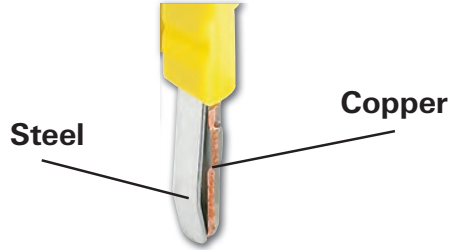

Perfect technology

- Copper current bar guarantees low contact resistance
- Steel spring guarantees strength, durability, and long-term stability

Extremely rugged!

- Indestructible steel spring
- Vibration-proof connection




Simple customization

- Individual poles easy to remove
- Circuits easy to identify

Wieland marking system – Reliable identification

Marking strips – Dependable

- Maximum hold to the terminal
- Solidify integrity of the assembly



Endless strip – Effective

- Mounting facility for endless strips permits single step marking of entire assembly
- Continuous labeling
- Uses commercially available labeling systems




Marking tags – Individual

- Individual labeling with minimum effort
- Ideal for service and maintenance



Feed-through blocks with push-in connection


- WTP 2,5/4**
- Feed-through block with push-in connection for mounting on TS 35
 - Nominal cross section 4 mm²



| Description | Type | Part No. | Std. Pack |
|---------------------------------------|-------------------------|---------------|------------|
| Feed-through block, gray | WTP 2,5/4 | 56.203.0055.0 | 100 |
| Feed-through block, blue | WTP 2,5/4 BLAU | 56.203.0055.6 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 47 mm / 38 mm | | |
| Wire strip length | 11 mm | | |
| Approvals | △ | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-1 | | |
| Cross section fine-stranded | 0.2 – 4 mm ² | | |
| Cross section solid/stranded | 0.2 – 4 mm ² | | |
| Cross section, AWG | | 24 – 12 | 22 – 12 |
| Rated current | 30 A | 30 A | 20 A |
| Rated voltage | 800 V* | 600 V | 600 V |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 | 07.312.6755.0 | 10 |
| Partition, gray | TWFN 2,5 | 07.312.6855.0 | 10 |

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.


- WTP 2,5/4 D1/2**
- Duo feed-through block with push-in connection for mounting on TS 35
 - Nominal cross section 4 mm²



| Description | Type | Part No. | Std. Pack |
|---------------------------------------|-------------------------|---------------|------------|
| Feed-through block, gray | WTP 2,5/4 D1/2 | 56.203.5055.0 | 100 |
| Feed-through block, blue | WTP 2,5/4 D1/2 BLAU | 56.203.5055.6 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 60 mm / 38 mm | | |
| Wire strip length | 11 mm | | |
| Approvals | △ | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-1 | | |
| Cross section fine-stranded | 0.2 – 4 mm ² | | |
| Cross section solid/stranded | 0.2 – 4 mm ² | | |
| Cross section, AWG | | 24 – 12 | 22 – 12 |
| Rated current | 30 A | 30 A | 20 A |
| Rated voltage | 800 V* | 600 V | 600 V |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 D1/2 | 07.312.6955.0 | 10 |
| Partition, gray | TWFN 2,5 D1/2 | 07.312.7055.0 | 10 |

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

- WTP 2,5/4 D2/2**
- Duo feed-through block with push-in connection for mounting on TS 35
 - Nominal cross section 4 mm²

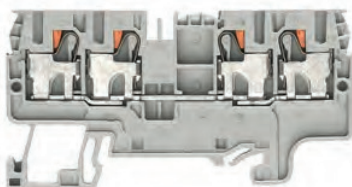


| Description | Type | Part No. | Std. Pack |
|---------------------------------------|-------------------------|---------------|------------|
| Feed-through block, gray | WTP 2,5/4 D2/2 | 56.203.5155.0 | 100 |
| Feed-through block, blue | WTP 2,5/4 D2/2 BLAU | 56.203.5155.6 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 72 mm / 38 mm | | |
| Wire strip length | 11 mm | | |
| Approvals | △ | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-1 | | |
| Cross section fine-stranded | 0.2 – 4 mm ² | | |
| Cross section solid/stranded | 0.2 – 4 mm ² | | |
| Cross section, AWG | | 24 – 12 | 22 – 12 |
| Rated current | 30 A | 30 A | 20 A |
| Rated voltage | 800 V* | 600 V | 600 V |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 D2/2 | 07.312.7155.0 | 10 |
| Partition, gray | TWFN 2,5 D2/2 | 07.312.7255.0 | 10 |

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Feed-through blocks with push-in connection

WTP 6/10


- Feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²



| Description | Type | Part No. | Std. Pack |
|---------------------------------------|------------------------|---------------|------------|
| Feed-through block, gray | WTP 6/10 | 56.206.0055.0 | 100 |
| Feed-through block, blue | WTP 6/10 BLAU | 56.206.0055.6 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 8 mm / 58 mm / 44 mm | | |
| Wire strip length | 15 mm | | |
| Approvals | | | |
| Technical data | | | |
| | IEC | UL | CSA |
| | EN 60 947-7-1 | | pending |
| Cross section fine-stranded | 0,2–10 mm ² | | |
| Cross section solid/stranded | 0.2–10 mm ² | | |
| Cross section, AWG | | 12–8 | 12–8 |
| Rated current | 57 A | 41 A | 41 A |
| Rated voltage | 1000 V* | 600 V | 600 V |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | AP WTP 6/10 | 07.313.4155.0 | 10 |
| Partition, gray | TW WTP 6/10 | 07.313.4255.0 | 10 |

* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Accessories for fasis WTP...

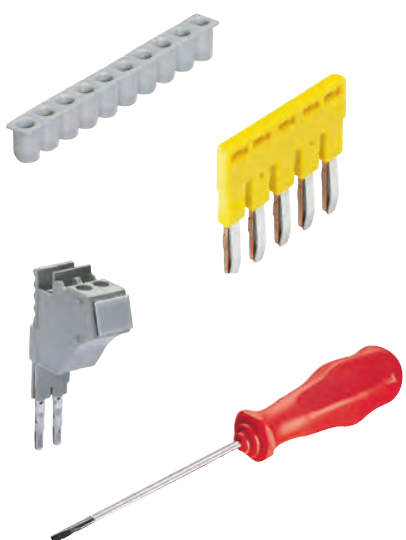

| Accessories for WTP 2,5/4... | | Type | Part No. | Std. Pack |
|---|--------------------------|----------------------|---------------|-----------|
| Cross connector, insulated | 2 pole | IVB WKF 2,5–2 | Z7.280.6227.0 | 10 |
| | 3 pole | IVB WKF 2,5–3 | Z7.280.6327.0 | 10 |
| | 4 pole | IVB WKF 2,5–4 | Z7.280.6427.0 | 10 |
| | 5 pole | IVB WKF 2,5–5 | Z7.280.6527.0 | 10 |
| | 6 pole | IVB WKF 2,5–6 | Z7.280.6627.0 | 10 |
| | 7 pole | IVB WKF 2,5–7 | Z7.280.6727.0 | 20 |
| | 8 pole | IVB WKF 2,5–8 | Z7.280.6827.0 | 20 |
| | 9 pole | IVB WKF 2,5–9 | Z7.280.6927.0 | 20 |
| | 10 pole | IVB WKF 2,5–10 | Z7.280.7027.0 | 20 |
| | 20 pole | IVB WKF 2,5–20 | Z7.280.8027.0 | 20 |
| Wire entry guide | 0.13–0.2 mm ² | LELN 2,5/1 WEISS | 05.564.3755.0 | 100 |
| | 0.25–0.5 mm ² | LELN 2,5/2 GRAU | 05.564.3855.0 | 100 |
| | 0.75–1.0 mm ² | LELN 2,5/3 SCHWARZ | 05.564.3955.0 | 100 |
| Test adapter, modular | | PS WKC/F | Z1.299.9753.0 | 10 |
| Test plug | | ST 2/2,3 | Z5.553.2921.0 | 10 |
| Screwdriver, uninsulated | | DIN 5264 B 0,6x3,5 | 06.502.4000.0 | 5 |
| Screwdriver, uninsulated, MINI | | DIN 5264 B 0,6x3,5 M | 06.502.5000.0 | 10 |
| Accessories for WTP 6/10... | | Type | Part No. | Std. Pack |
| Cross connector, insulated, I _N : 41 A | 2 pole | IVB WKFN 6–2 | Z7.282.5227.0 | 10 |
| | 3 pole | IVB WKFN 6–3 | Z7.282.5327.0 | 10 |
| | 4 pole | IVB WKFN 6–4 | Z7.282.5427.0 | 10 |
| | 5 pole | IVB WKFN 6–5 | Z7.282.5527.0 | 10 |
| Test plug | | ST 2/2,3 | Z5.553.2921.0 | 10 |
| Screwdriver, uninsulated | | DIN 5264 B 0,8x4 | 06.502.4100.0 | 5 |

Ground blocks with push-in connection

WTP 2,5/4 PE

- Ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²




| Description | Type | Part No. | Std. Pack |
|---------------------------------------|-----------------------|---------------|------------|
| Ground block, green/yellow | WTP 2,5/4 PE | 56.203.9055.0 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 47 mm / 38 mm | | |
| Wire strip length | 11 mm | | |
| Approvals | | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-2 | | |
| Cross section fine-stranded | 0.2–4 mm ² | | |
| Cross section solid/stranded | 0.2–4 mm ² | | |
| Cross section, AWG | | 24–12 | 22–12 |
| Rated current | | | |
| Rated voltage | 800 V* | | |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| | | | |
| | | | pending |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 | 07.312.6755.0 | 10 |
| Partition, gray | TWFN 2,5 | 07.312.6855.0 | 10 |

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

WTP 2,5/4 D1/2/PE

- Duo ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²




| Description | Type | Part No. | Std. Pack |
|---------------------------------------|-----------------------|---------------|------------|
| Ground block, green/yellow | WTP 2,5/4 D1/2/PE | 56.203.9355.0 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 60 mm / 38 mm | | |
| Wire strip length | 11 mm | | |
| Approvals | | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-2 | | |
| Cross section fine-stranded | 0.2–4 mm ² | | |
| Cross section solid/stranded | 0.2–4 mm ² | | |
| Cross section, AWG | | 24–12 | 22–12 |
| Rated current | | | |
| Rated voltage | 800 V* | | |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| | | | |
| | | | pending |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 D1/2 | 07.312.6955.0 | 10 |
| Partition, gray | TWFN 2,5 D1/2 | 07.312.7055.0 | 10 |

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

WTP 2,5/4 D2/2/PE

- Duo ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

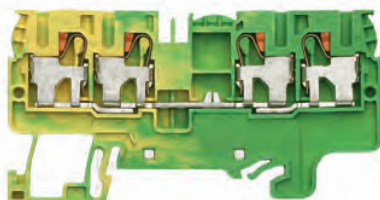


| Description | Type | Part No. | Std. Pack |
|---------------------------------------|-----------------------|---------------|------------|
| Ground block, green/yellow | WTP 2,5/4 D2/2/PE | 56.203.9155.0 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 72 mm / 38 mm | | |
| Wire strip length | 11 mm | | |
| Approvals | | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-2 | | |
| Cross section fine-stranded | 0.2–4 mm ² | | |
| Cross section solid/stranded | 0.2–4 mm ² | | |
| Cross section, AWG | | 24–12 | 22–12 |
| Rated current | | | |
| Rated voltage | 800 V* | | |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| | | | |
| | | | pending |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 D2/2 | 07.312.7155.0 | 10 |
| Partition, gray | TWFN 2,5 D2/2 | 07.312.7255.0 | 10 |

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Ground blocks with push-in connection

WTP 6/10 PE


- Ground block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²



| Description | Type | Part No. | Std. Pack |
|---------------------------------------|------------------------|-----------------|------------------|
| Ground block, green/yellow | WTP 6/10 PE | 56.206.9055.0 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 8 mm / 58 mm / 44 mm | | |
| Wire strip length | 15 mm | | |
| Approvals | | | |
| Technical data | | | |
| | IEC | UL | CSA |
| | EN 60 947-7-2 | | pending |
| Cross section fine-stranded | 0.2–10 mm ² | | |
| Cross section solid/stranded | 0.2–10 mm ² | | |
| Cross section, AWG | | 12–8 | 12–8 |
| Rated current | | | |
| Rated voltage | 1000 V* | | |
| Rated impulse voltage | 8 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | AP WTP 6/10 | 07.313.4155.0 | 10 |
| Partition, gray | TW WTP 6/10 | 07.313.4255.0 | 10 |

* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Accessories for fasis WTP...

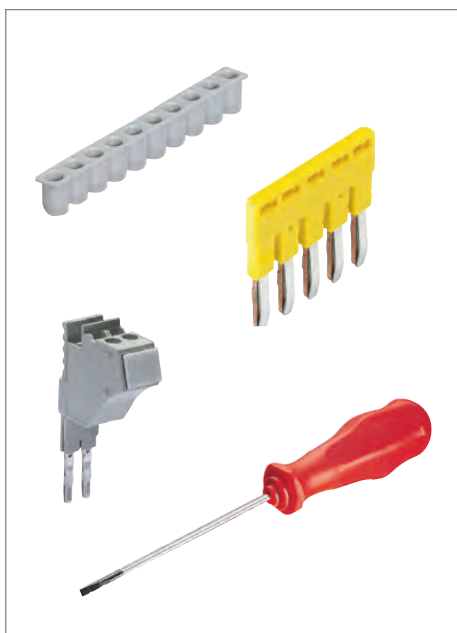



| Accessories for WTP 2,5/4... | | Type | Part No. | Std. Pack |
|---|------------------|--------------------------|------------------|------------------|
| Cross connector, insulated | 2 pole | IVB WKF 2,5–2 | Z7.280.6227.0 | 10 |
| | 3 pole | IVB WKF 2,5–3 | Z7.280.6327.0 | 10 |
| | 4 pole | IVB WKF 2,5–4 | Z7.280.6427.0 | 10 |
| | 5 pole | IVB WKF 2,5–5 | Z7.280.6527.0 | 10 |
| | 6 pole | IVB WKF 2,5–6 | Z7.280.6627.0 | 10 |
| | 7 pole | IVB WKF 2,5–7 | Z7.280.6727.0 | 20 |
| | 8 pole | IVB WKF 2,5–8 | Z7.280.6827.0 | 20 |
| | 9 pole | IVB WKF 2,5–9 | Z7.280.6927.0 | 20 |
| | 10 pole | IVB WKF 2,5–10 | Z7.280.7027.0 | 20 |
| | 20 pole | IVB WKF 2,5–20 | Z7.280.8027.0 | 20 |
| | Wire entry guide | 0.13–0.2 mm ² | LELN 2,5/1 WEISS | 05.564.3755.0 |
| 0.25–0.5 mm ² | | LELN 2,5/2 GRAU | 05.564.3855.0 | 100 |
| 0.75–1.0 mm ² | | LELN 2,5/3 SCHWARZ | 05.564.3955.0 | 100 |
| Test adapter, modular | | PS WKC/F | Z1.299.9753.0 | 10 |
| Test plug | | ST 2/2,3 | Z5.553.2921.0 | 10 |
| Screwdriver, uninsulated | | DIN 5264 B 0,6x3,5 | 06.502.4000.0 | 5 |
| Screwdriver, uninsulated, MINI | | DIN 5264 B 0,6x3,5 M | 06.502.5000.0 | 10 |
| Accessories for WTP 6/10... | | Type | Part No. | Std. Pack |
| Cross connector, insulated, I _N : 41 A | 2 pole | IVB WKFN 6–2 | Z7.282.5227.0 | 10 |
| | 3 pole | IVB WKFN 6–3 | Z7.282.5327.0 | 10 |
| | 4 pole | IVB WKFN 6–4 | Z7.282.5427.0 | 10 |
| | 5 pole | IVB WKFN 6–5 | Z7.282.5527.0 | 10 |
| | Test plug | | ST 2/2,3 | Z5.553.2921.0 |
| Screwdriver, uninsulated | | DIN 5264 B 0,8x4 | 06.502.4100.0 | 5 |

Multi-tier blocks with push-in connection

WTP 2,5/4 E


- Multi-tier block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

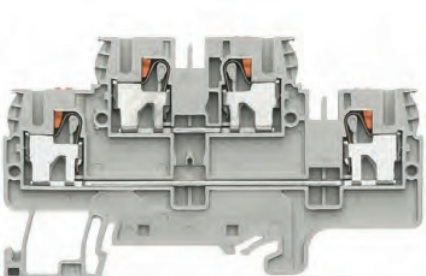


| Description | Type | Part No. | Std. Pack |
|---------------------------------------|---|---------------|------------|
| Multi-tier block, gray | WTP 2,5/4 E | 56.203.7055.0 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 82 mm / 48 mm | | |
| Wire strip length | 11 mm | | |
| Approvals |  | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-1 | | |
| Cross section fine-stranded | 0.2–4 mm ² | | |
| Cross section solid/stranded | 0.2–4 mm ² | | |
| Cross section, AWG | | 24–12 | 22–12 |
| Rated current | 24 A | 20 A | 20 A |
| Rated voltage | 500 V | 300 V | 300 V |
| Rated impulse voltage | 6 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 E | 07.312.7355.0 | 10 |
| Partition, gray | TWPN 2,5 E | 07.312.7455.0 | 10 |
| Marking tag carrier, 2-fold | BT 5/2 | 04.243.0855.0 | 100 |

WTP 2,5/4 E VB


- Multi-tier block, vertically connected, with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

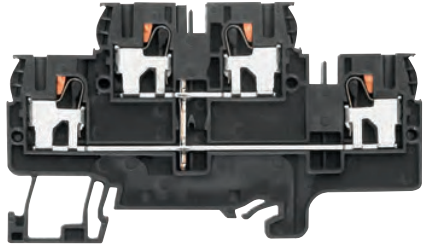


| Description | Type | Part No. | Std. Pack |
|---------------------------------------|---|---------------|------------|
| Multi-tier block, black | WTP 2,5/4 E VB | 56.203.6955.1 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 82 mm / 48 mm | | |
| Wire strip length | 11 mm | | |
| Approvals |  | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-2 | | |
| Cross section fine-stranded | 0.2–4 mm ² | | |
| Cross section solid/stranded | 0.2–4 mm ² | | |
| Cross section, AWG | | 24–12 | 22–12 |
| Rated current | 24 A | 20 A | 20 A |
| Rated voltage | 500 V | 300 V | 300 V |
| Rated impulse voltage | 6 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 E | 07.312.7355.0 | 10 |
| Partition, gray | TWPN 2,5 E | 07.312.7455.0 | 10 |
| Marking tag carrier, 2-fold | BT 5/2 | 04.243.0855.0 | 100 |


WTP 2,5/4 E PE

- Multi-tier ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

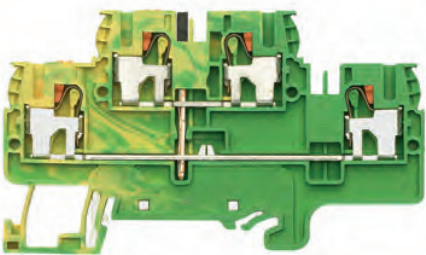

| Description | Type | Part No. | Std. Pack |
|---------------------------------------|---|---------------|------------|
| Multi-tier ground block, green/yellow | WTP 2,5/4 E PE | 56.203.8955.0 | 100 |
| General data | | | |
| Width / length / height, incl. TS 7.5 | 5 mm / 82 mm / 48 mm | | |
| Wire strip length | 11 mm | | |
| Approvals |  | | |
| Technical data | IEC | UL | CSA |
| | EN 60 947-7-2 | | |
| Cross section fine-stranded | 0.2–4 mm ² | | |
| Cross section solid/stranded | 0.2–4 mm ² | | |
| Cross section, AWG | | 24–12 | 22–12 |
| Rated current | | | |
| Rated voltage | 500 V | | |
| Rated impulse voltage | 6 kV | | |
| Pollution degree | 3 | | |
| Accessories | | | |
| | Type | Part No. | Std. Pack |
| End plate, gray | APFN 2,5 E | 07.312.7355.0 | 10 |

Accessories for *fasis* WTP 2,5/4...

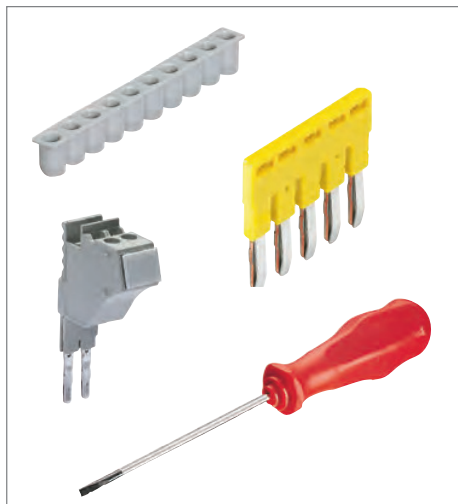

| Accessories | | Type | Part No. | Std. Pack |
|-------------------------------------|--------------------------|----------------------|---------------|-----------|
| Cross connector, insulated | 2 pole | IVB WKF 2,5-2 | Z7.280.6227.0 | 10 |
| | 3 pole | IVB WKF 2,5-3 | Z7.280.6327.0 | 10 |
| | 4 pole | IVB WKF 2,5-4 | Z7.280.6427.0 | 10 |
| | 5 pole | IVB WKF 2,5-5 | Z7.280.6527.0 | 10 |
| | 6 pole | IVB WKF 2,5-6 | Z7.280.6627.0 | 10 |
| | 7 pole | IVB WKF 2,5-7 | Z7.280.6727.0 | 20 |
| | 8 pole | IVB WKF 2,5-8 | Z7.280.6827.0 | 20 |
| | 9 pole | IVB WKF 2,5-9 | Z7.280.6927.0 | 20 |
| | 10 pole | IVB WKF 2,5-10 | Z7.280.7027.0 | 20 |
| | 20 pole | IVB WKF 2,5-20 | Z7.280.8027.0 | 20 |
| Vertical cross connector, insulated | | IVB WKF V | Z7.261.1127.0 | 20 |
| Wire entry guide | 0.13-0.2 mm ² | LELN 2,5/1 WEISS | 05.564.3755.0 | 100 |
| | 0.25-0.5 mm ² | LELN 2,5/2 GRAU | 05.564.3855.0 | 100 |
| | 0.75-1.0 mm ² | LELN 2,5/3 SCHWARZ | 05.564.3955.0 | 100 |
| Test adapter, modular | | PS WKC/F | Z1.299.9753.0 | 10 |
| Test plug | | ST 2/2,3 | Z5.553.2921.0 | 10 |
| Screwdriver, uninsulated | | DIN 5264 B 0,6x3,5 | 06.502.4000.0 | 5 |
| Screwdriver, uninsulated, MINI | | DIN 5264 B 0,6x3,5 M | 06.502.5000.0 | 10 |