

# 102 SERIES


## SUPER MICRO ONE TOUCH LOCK CONNECTOR




### 102 SERIES 6P/8P/12P 13.7mm

TYPE	
MALE PLUG	102A- P
FEMALE RECEPTACLE	102B- P
SPECIFICATIONS	
INSULATION	PPS
INNER MOLD	POM
OUTER MOLD	PVC
CONTACT PIN	TUNING FORK TYPE BERYLLIUM COPPER (GOLD FLASH OVER Ni)
CONTACT RESISTANCE	$\leq 15m$
CURRENT RATING	$\leq 1A$
VOLTAGE RATING	AC 500V / min(6P&8P) AC 300V / min(12P)
INSULATION RESISTANCE	$\geq 100M$ , 500V
ONE TOUCH LOCKING	


### FACE VIEW MALE



6P




8P




12P

### SIDE VIEW (mm)

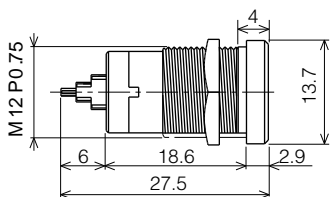

RECEPTACLE

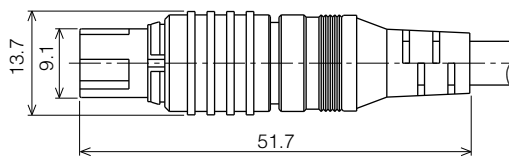

PLUG