

102 -WP SERIES


SUPER MICRO ONE TOUCH LOCK CONNECTOR WP.TYPE




102-WP SERIES 6P/8P/12P 13.7mm

TYPE	
MALE PLUG	102AW- P
FEMALE RECEPTACLE	102BW- P
SPECIFICATIONS	
INSULATION	PPS
INNER MOLD	POM
OUTER MOLD	PVC
CONTACT PIN	TUNING FORK TYPE BERYLLIUM COPPER (GOLD FLASH OVER Ni)
CONTACT RESISTANCE	≤ 15m
CURRENT RATING	≤ 1A
VOLTAGE RATING	AC 500V / min(6P&8P) AC 300V / min(12P)
INSULATION RESISTANCE	≥ 100M , 500V
ONE TOUCH LOCKING	
WATER PROOF	IP67


FACE VIEW MALE



6P




8P




12P

SIDE VIEW (mm)



RECEPTACLE

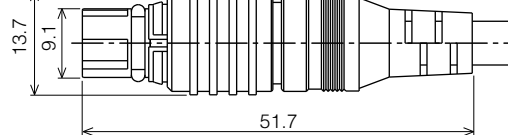

PLUG