

60 SERIES


SUPER MICRO ONE TOUCH LOCK CONNECTOR



60 SERIES 6P/8P/10P/12P 10.5mm

TYPE	
FEMALE PLUG	60A- P
MALE RECEPTACLE	60B- P
SPECIFICATIONS	
INSULATION	PPS
INNER MOLD	POM
OUTER MOLD	PVC
CONTACT PIN	TUNING FORK TYPE BERYLLIUM COPPER (GOLD FLASH OVER Ni)
CONTACT RESISTANCE	≤15m
CURRENT RATING	≤1A
VOLTAGE RATING	AC 500V / min(6P&8P) AC 300V / min(10P&12P)
INSULATION RESISTANCE	≥100M , 500V
ONE TOUCH LOCKING	

FACE VIEW FEMALE

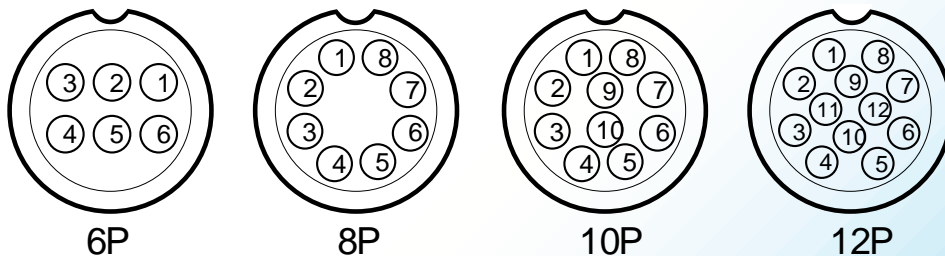

SIDE VIEW (mm)

