

SPECIFICATIONS

Insulation Resistance:	500MΩ min. at 500V DC
Withstanding Voltage:	250V ACrms for 1 minute
Contact Resistance:	100mΩ max. at 1mA / 20mV max.
Current Rating:	0.5A
Voltage Rating:	5.0Vrms
Operating Temp. Range:	-55°C to +85°C
Mating Cycles:	5,000 insertions



MATERIALS AND FINISH

Insulator:	LCP, glass filled (UL94V-0)
Contact Plating:	Mating Face - Gold over Nickel Solder Tails - SnCu over Nickel

AUTOMOTIVE COMPLIANT

PART NUMBER


FMS006 - 2620 - 0




FEATURES

- Conforms to GSM11.11 standard for the European mobile phone system
- Without switch
- Smooth extraction function by Push / Push mechanism
- Tape and Reel Packaging (800 pcs./reel)

OUTLINE CONNECTOR DIMENSIONS

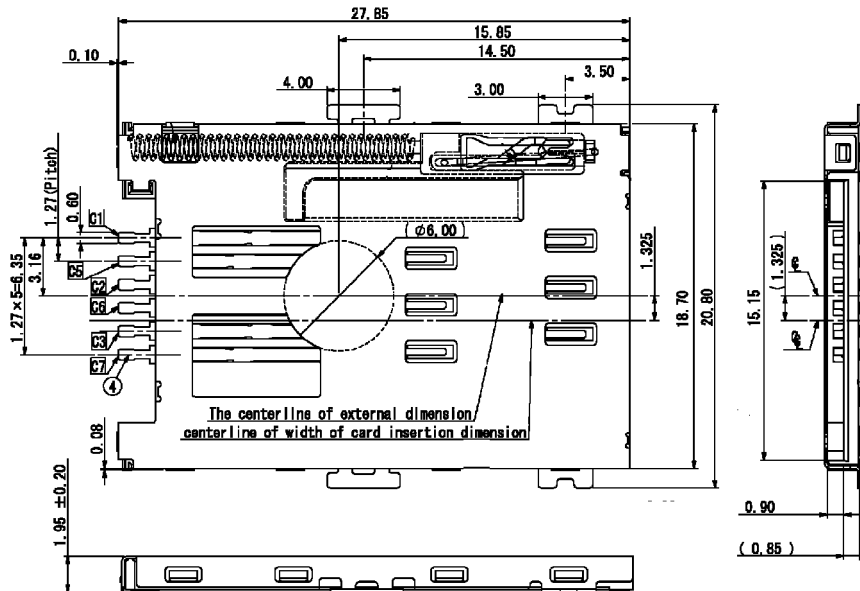

RECOMMENDED PCB LAYOUT (MOUNTING SIDE)

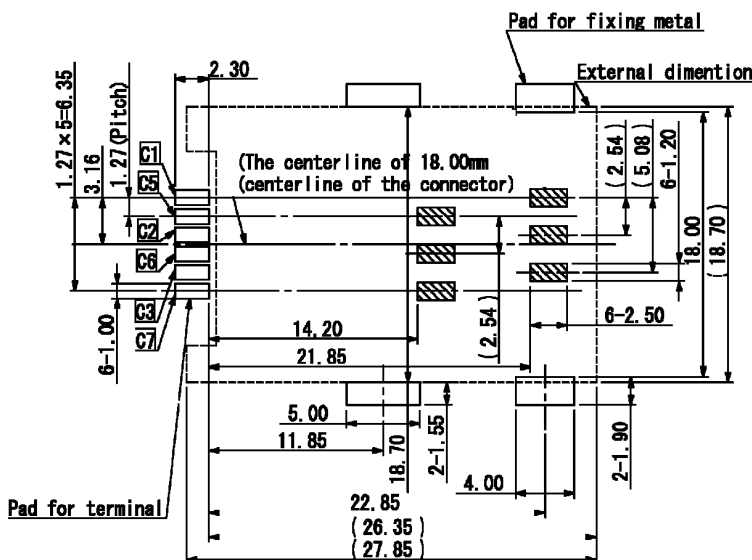

CARD INSERTION

