



Y-ConJack-13 / -23



Y-ConJack-14 / -24



PART NUMBER

Y-ConJack - * *

Series

Power Contacts 1 = w/o. 2 = with

Design Number

SERIES Y-ConJack

DESCRIPTION

RJ45 PCB mounted jacks, Cat 5, with or without power contacts. For use with Y-ConFlange-10-*, Y-ConFlange-40-* and all Y-Con plugs

RJ45 Buchse auf PCB, Cat 5, mit oder ohne zusätzliche Kontakte für die Stromversorgung. Für den Einsatz mit Y-ConFlange-10-*, Y-ConFlange-40-* und allen Y-Con Kabelsteckern

MATERIAL


Jack body Isolierkörper	PA, UL94V-0
Shielding Schirmung	Nickel plated brass
Contact Kontakte	Contact area 30µ" Au/50µ" Ni
PCB	FR4, UL94V-0

SPECIFICATIONS


Operating Temp.: Betriebstemp.	-40°C ~ +120°C
Durability: Lebensdauer	1,500 mechanical cycles
Current Rating: Bemessungsstrom	2.1A @ 70°C (power contacts)

OUTLINE DIMENSIONS

Y-ConJack-13 / -23

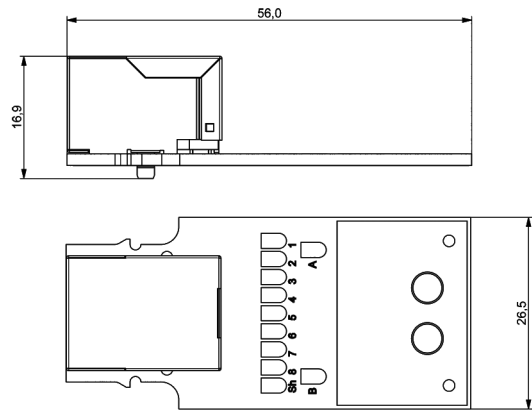

Y-ConJack-14 / -24

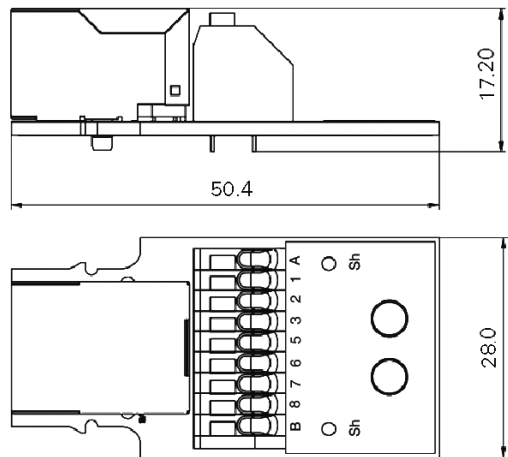

Part Number	Signal Contacts	Power Contacts	Orientation	PCB
Y-ConJack-13	8	0	90°	with solder pads
Y-ConJack-23	8	2	90°	with solder pads
Y-ConJack-14	8	0	90°	with terminals
Y-ConJack-24	8	2	90°	with terminals