

# Jester ML48

## 48 Channel Moving Light Control Console

### Key Features

- 48 Channel Memory Lighting Control with Moving Light Support
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- RDM enabled
- Upgradeable firmware
- External power supply
- 200 dimmer channels
- 30 fixtures
- 30 each of Colour, Position and Beamshape Palettes
- Playback stack with programmable times
- 480 Submasters (20 pages of 24) controlled from Multi-Function-Buttons or DMX Input
- On board Extensive Fixture Library
- Moving light effects system





### Overview

The Jester ML48 brings greater control and flexibility to mixed lighting applications using up to 30 moving lights and 48 dimmer channels. Featuring an effects system, recorded pallets, and an extensive library of fixture personalities, the Jester ML48 is an ideal choice for rental or mid sized venues with mixed lighting needs.

The Jester ML48 also offers direct control of up to 48 dimmer channels. Show playback is either via submasters or through a traditional theatrical cue stack.

Choose from preset, program or playback mode, add effects, and conventional fader control to tailor the way you operate your moving lights, colour changers and dimming to deliver exactly what you need, show after show.

\* Monitor not included



### Ordering Information

- 00-148-11 Jester ML48
- 00-768-00 Jester ML48 Flightcase


### Supplied Accessories

- Power Supply
- Operating Manual (on CD)

### Specifications

- Control Channels: Up to 512
- Channel Faders: 48
- Fixture select buttons: 3 pages of 10
- Preset Master Faders: 2
- Memory Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 48
- Midi In/Thru
- VGA Monitor Port
- Audio Input
- Remote Input
- Storage and Keyboard Connections
- RDM Enabled
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX512-A
- Dimensions: 90mm(H) x 970mm(W) x 278mm(D)
- Weight: 8.5Kg
- Operating Temperature: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

### Dimensions

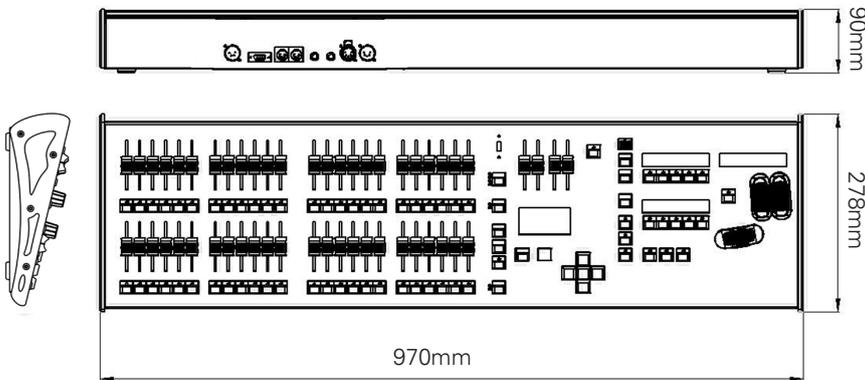

Weight: 8.5Kg

### Contact your local Eaton office

Usk House, Lakeside, Llantarnam Park,  
 Cwmbran, Torfaen, NP44 3HD. UK  
 T: +44 (0)1633 838088 F: +44 (0)1633 867880  
 E: enquiries@zero88.com www.zero88.com

Eaton Industries Manufacturing GmbH  
 Electrical Sector EMEA  
 Route de la Longeraie  
 71110 Morges, Switzerland  
 Eaton.eu

© 2015 Eaton  
 All Rights Reserved

Jester\_ML48\_Datasheet\_UK\_Rev4\_1015

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



FM 29148

