




ChilliNet RS232 Link

Allows ChilliNet integration with other control equipment

Key Features

- Bidirectional communications with the ChilliNet network
- Comprehensive command set
- Flexible addressing – communicate with specific dimmers, or with entire areas/zones
- Status LEDs
- Electrical isolation

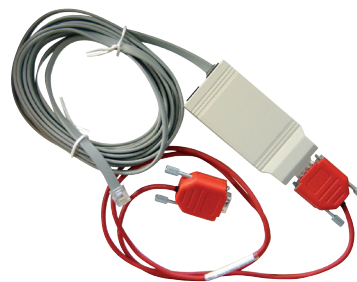

Ordering Information

01-211-00 RS232 ChilliNet Link

Supplied Accessories

RS232 / ChilliNet Interface
Installation instructions
(incl . ASCII protocol information)
D - type RS232 cable , 9-pin, 100cm
RJ12 ChilliNet cable , 300cm

Dimensions

42mm (H) x 95mm (W) x 23mm (D)

Weight: 0.05Kg

Overview

The RS232 Interface allows for the connection of ChilliNet products to a range of control systems. Most commonly AMX® and Crestron®.

This allows for the integration of a Chilli Network to AV, Sound and other types of equipment.

Contact your local Eaton office

Usk House, Lakeside, Llantarnam Park,
Cwmbran, Torfaen, NP44 3HD. UK
T: +44 (0)1633 838088 F: +44 (0)1633 867880
E: enquiries@zero88.com www.zero88.com



Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

© 2015 Eaton
All Rights Reserved

ChilliNet_RS232_Link_Datasheet_UK_Rev3_0615

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

