



Jester ML24

24 Channel Moving Light Control Console

Key Features

- 24 Channel Memory Lighting Control with Moving Light Support
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snapshots of all 512 DMX channels
- VGA Monitor Port
- USB storage and keyboard support
- MIDI Notes & Show Control
- Lock Function
- LCD Display for stand-alone use
- Online Help in multiple languages
- Offline Editor (Phantom Jester)
- Remote triggers
- RDM enabled
- Upgradeable firmware
- External power supply
- 30 Fixtures
- 12/24 channels of control
- 12 x 24 Submasters
- 30 each of Colour, Position and Beamshape Palettes
- On board extensive Fixture Library
- Moving light effects system





Overview

The Jester ML24 is a powerful performer across rock, theatre and corporate lighting presentations. The console offers users a cost effective solution for control of up to 30 moving lights and 24 dimmer channels. Featuring an effects system, recorded pallets, and an extensive library of fixture personalities, the Jester ML24 is an ideal choice for mixed lighting venues.

The Jester ML24 also offers additional direct control of 24 dimmer channels. Show playback is either via the submasters or through a traditional theatrical cue stack.

The three operating modes feature control in preset, program or playback including using a traditional theatre playback stack. So whether you are using moving lights, colour changers, effects or conventional dimming, alone or in combination, the Jester ML24 delivers.

* Monitor not included



Ordering Information

00-114-00	Jester ML24
00-767-00	Jester ML24 Flightcase


Supplied Accessories

Power Supply
Operating Manual (on CD)

Specifications

- Control Channels: Up to 512
- Channel Faders: 24
- Fixture select buttons: 3 pages of 10
- Preset Master Faders: 2
- Memory Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 24
- Midi In/Thru
- VGA Monitor Port
- Audio Input
- Remote Input
- Storage and Keyboard Connections
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX512-A
- RDM Enabled
- Dimensions: 90mm(H) x 710mm(W) x 278mm(D)
- Weight: 6.5Kg (14.3lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

Dimensions

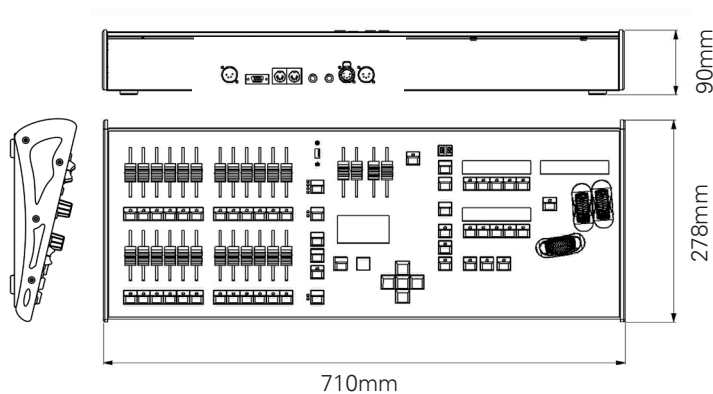

Weight: 6.5Kg

Contact your local Eaton office

Usk House, Lakeside, Llantarnam Park,
Cwmbran, Torfaen, NP44 3HD. UK
T: +44 (0)1633 838088 F: +44 (0)1633 867880
E: enquiries@zero88.com www.zero88.com

Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

© 2015 Eaton
All Rights Reserved

Jester_ML24_Datasheet_UK_Rev4_1015

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.