

Z1PK102H

● **FEATURES**

- * Halogen-free type
- * Compliance to RoHS product
- * Lead less chip form, no lead damage
- * Low power loss, High efficiency
- * High current capability, low VF
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- * Patented ZPAK™ Package Technology

● **APPLICATION**

- * Switching mode power supply applications
- * Portable equipment battery applications
- * High frequency rectification
- * DC / DC Converter
- * Telecommunication


● **MECHANICAL DATA**

Case : Packed with FRP substrate and epoxy underfilled
Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.
Polarity : Laser Cathode band marking
Weight : 0.005 gram


● **PACKING**

- * 3,000 pieces per 7" (178mm ± 2mm) reel
- * 5 reels per box
- * 6 boxes per carton

● **OUTLINE DIMENSIONS**

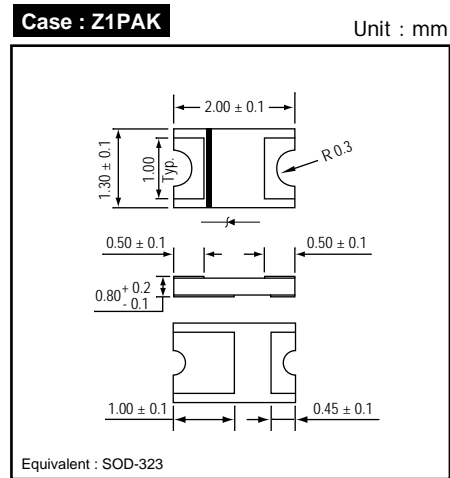

● **MARKING**

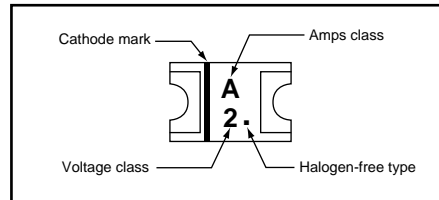

Absolute Maximum Ratings (Ta = 25 °C)

| ITEM | Symbol | Conditions | Rating | Unit |
|--------------------------------------|--------|-----------------------------|--------------|------|
| Repetitive peak reverse voltage | VRRM | | 20 | V |
| Average forward current | IF(AV) | | 1.0 | A |
| Peak forward surge current | IFSM | 8.3ms single half sine-wave | 20 | A |
| Operating junction temperature Range | Tj | | -55 to +125 | °C |
| Storage temperature Range | TSTG | | - 55 to +150 | °C |

Electrical characteristics (Ta = 25 °C)

| ITEM | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|---------|-----------------------------|------|-------|------|------|
| Forward voltage (NOTE 1) | VF | IF = 1.0 A | - | 0.47 | 0.50 | V |
| Repetitive peak reverse current (NOTE 1) | IRRM | VR = Max. VRRM , Ta = 25 °C | - | 0.028 | 0.20 | mA |
| Junction capacitance | Cj | VR = 4V, f = 1.0 MHz | - | 115 | - | pF |
| Thermal resistance | Rth(JA) | Junction to ambient | - | 112 | - | °C/W |
| | Rth(JL) | Junction to lead | - | 18 | - | °C/W |

NOTES : (1) Pulse test width PW=300usec , 1% duty cycle.
 (2) Mounted on P.C. board with 1.0 x 0.5mm copper pad areas.

FIG.1 - FORWARD CURRENT DERATING CURVE

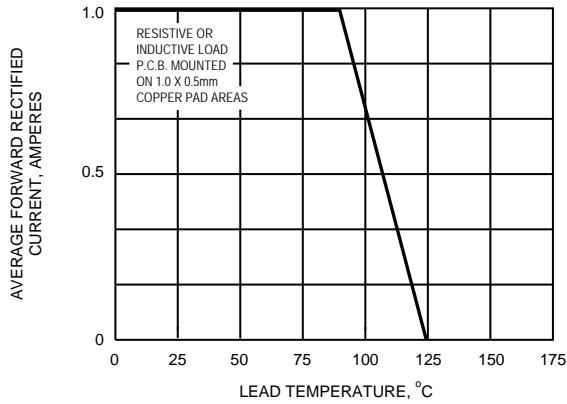


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

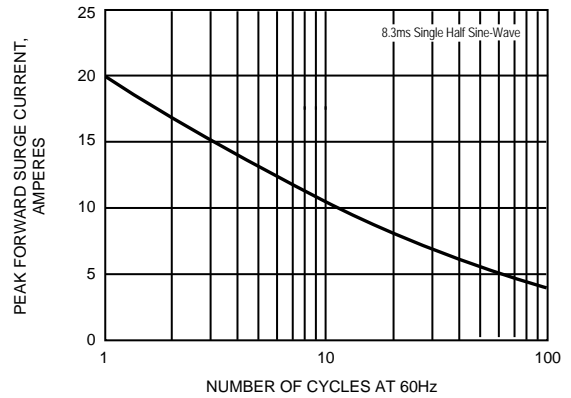


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

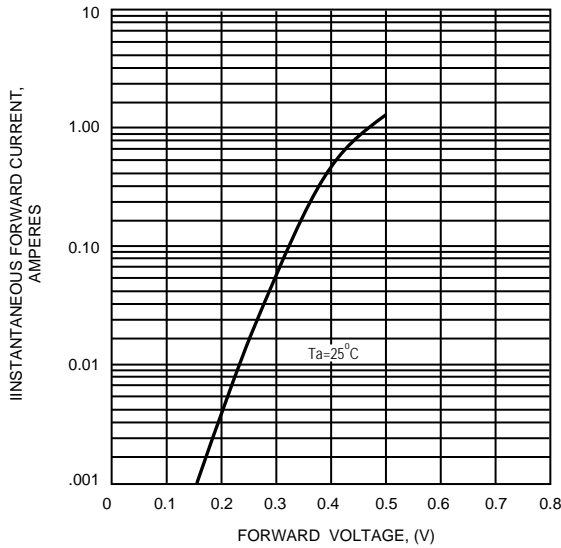


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

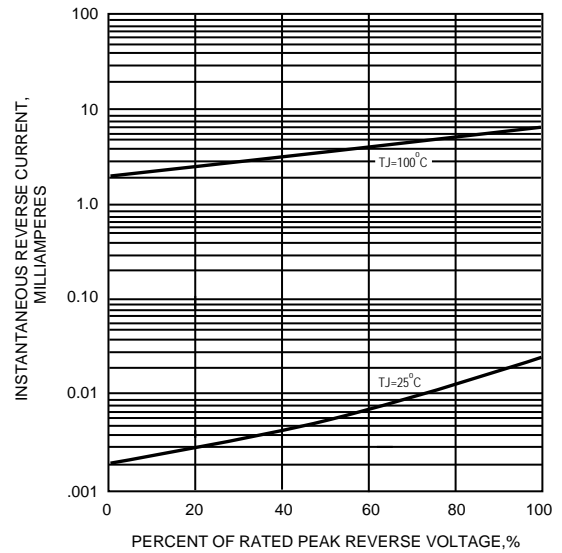


FIG.5 - TYPICAL JUNCTION CAPACITANCE

