

1

2

3

4

5

6

7

A

B

C

D

E

F

G

H

A

B

C

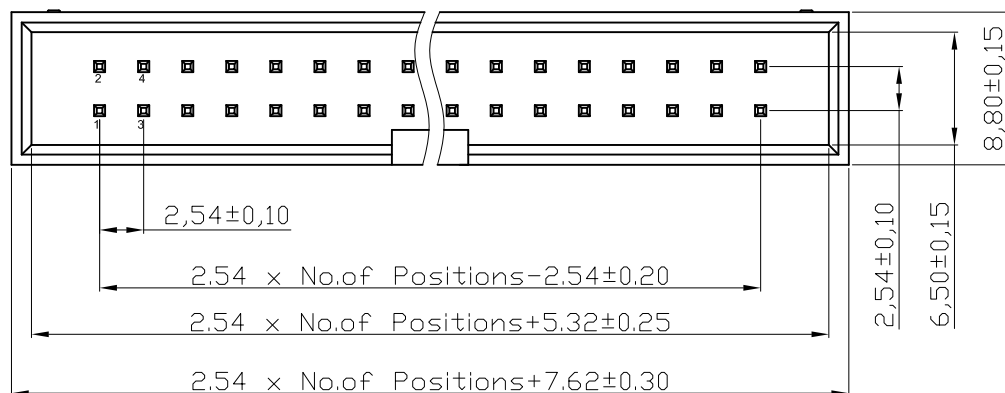
D

E

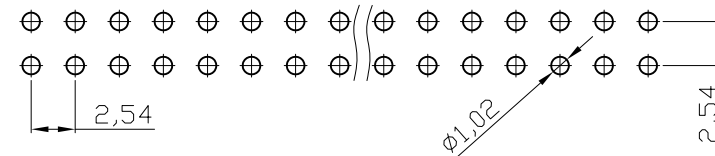
F

G

H



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm 0,05$)

**NOTES:****MATERIAL**

1. Insulator Material: PBT+30%GF(UL94V-0), Grey
2. Contact Material : Brass
3. Contact Plating :
AWHW xxG-0202-T: Gold flash/Tin Over Ni
AWHW xxG-0102-T: 30u"Au/Tin Over Ni

ELECTRICAL


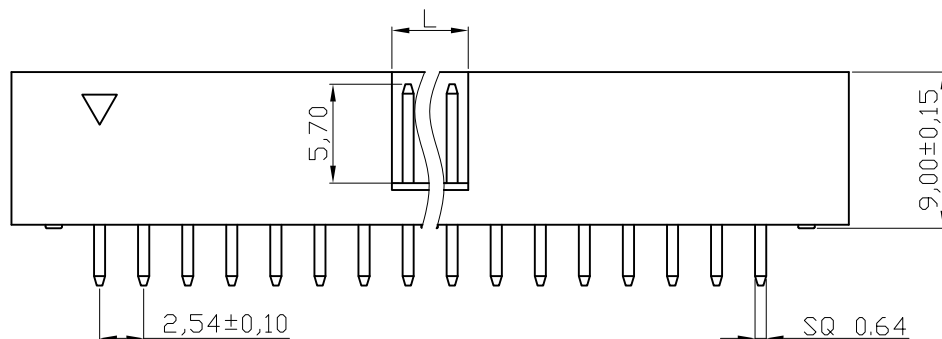
1. Current Rating : 3AMP
2. Withstand Voltage : 500V AC/Minute
3. Contact Resistance : 20m Ω max
4. Insulation Resistance: 1000M Ω min

ENVIRONMENTAL

1. Operation Temperature: -40°C to +105°C
2. Packing : Tray packing

Order information:

xx : 06,08,10,12,14,16,18,20,24
26,30,34,40,50,60,64

**Dimension antitheses list**

NO. Pin	L
6P-8P	4.00
10P-64P	4.40

RoHS compliant
Unit: mm



Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	Alex	
X.X	$\pm 0,40$					12.12.2013	Amy	ASSMANN WSW-No.
X.XX	$\pm 0,25$	④	Add UL file no.			12.12.2013	Amy	AWHW xxG-0202-T AWHW xxG-0102-T
X.XXX	$\pm 0,15$	③	Add the plating Au 30u"			23.10.2013	Winnie	
DIM	TOL	②	Update			29.06.2009	Dean	Drawing-No.
Angle	$\pm 3^\circ$	①	Drawn			25.01.2006	Alex	ASS 2314 CO
								rev04
		Id.	Modification			Date	Name	Replace
								Sheet 1/2

ASSMANN
WSW components

1

2

3

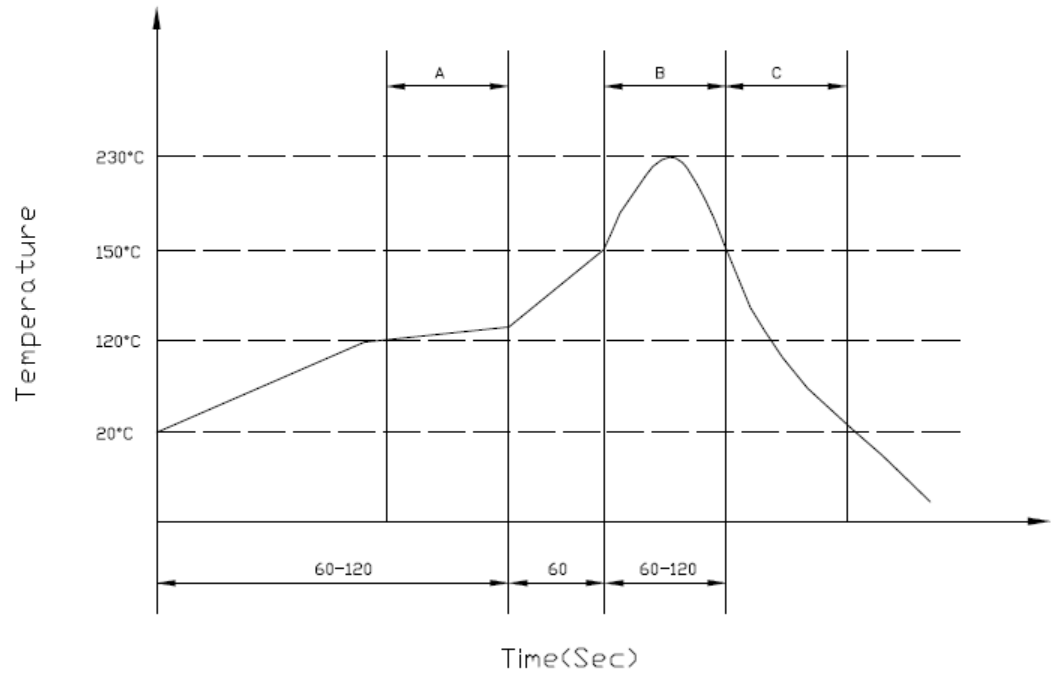
4

5

6

7

SV3409



A:Preheating B:Soldering C:Gradual Cooling
Tip Temperature Time:3-5Sec

RoHS compliant
Unit: mm



Scale	Free					Date	Name
TOLERANCE						Drawn	Alex
X.X	±0.40					25.01.2006	Alex
X.XX	±0.25	④	Add UL file no.	12.12.2013	Amy	Approved	12.12.2013
X.XXX	±0.15	③	Add the plating Au 30u"	23.10.2013	Winnie		
DIM	TOL	②	Update	29.06.2009	Dean		
Angle	±3°	①	Drawn	25.01.2006	Alex		
		Id.	Modification	Date	Name		

Solder Profile for PBT

ASSMANN WSW-No. AWHW xxG-0202-T
AWHW xxG-0102-T

Drawing-No.

ASS 2314 CO rev04

Replace Sheet 2/2