

### Data Sheet

**Total Power:** 6 W  
**Input Voltage:** 12, 24 or 48 V  
**# of Outputs:** Single and Dual

### SPECIAL FEATURES

- Ultra compact DIP package  
23.8 x 13.7 x 8.0 mm  
(0.94 x 0.54 x 0.31 inches)
- Efficiency up to 86%
- I/O-isolation 1500 VDC
- Ultra-wide 4:1 input range
- Operating temperature range  
-40 °C to +85 °C
- Input filter meets EN 55022, class A  
and FCC, level A
- Three year product warranty
- UL/cUL/IEC/EN 62368-1 (60950-1)  
safety approval and CE marking

### SAFETY

- UL/cUL 60950-1 recognition  
(UL certificate), IEC/EN60950-1
- UL/cUL 62368-1 recognition  
(UL Certificate), IEC/EN62368-1



### Electrical Specifications

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	86% @ 24 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	0.8%
Load regulation	1.0%
Noise/ripple	55 mV
Overload protection	150% typ of Io max, Hiccup
Short circuit protection	Hiccup mode
Switching frequency	370 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	500 pF


### Environmental Specifications

Operating ambient temperature range	-40 °C to +85 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	TBD Khrs calculated

## Ordering Information

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Power
ATA01F18-L	9-36 Vdc	3.3 V	1200 mA	78%	4 W
ATA01A18-L	9-36 Vdc	5 V	1200 mA	82%	6 W
ATA01B18-L	9-36 Vdc	12 V	500 mA	85%	6 W
ATA01C18-L	9-36 Vdc	15 V	400 mA	85%	6 W
ATA01H18-L	9-36 Vdc	24 V	250 mA	86%	6 W
ATA01BB18-L	9-36 Vdc	±12 V	250 mA	85%	6 W
ATA01CC18-L	9-36 Vdc	±15 V	200 mA	86%	6 W
ATA01F36-L	18-75 Vdc	3.3 V	1200 mA	78%	4 W
ATA01A36-L	18-75 Vdc	5 V	1200 mA	82%	6 W
ATA01B36-L	18-75 Vdc	12 V	500 mA	85%	6 W
ATA01C36-L	18-75 Vdc	15 V	400 mA	85%	6 W
ATA01H36-L	18-75 Vdc	24 V	250 mA	86%	6 W
ATA01BB36-L	18-75 Vdc	± 12 V	250 mA	85%	6 W
ATA01CC36-L	18-75 Vdc	± 15 V	200 mA	86%	6 W

## Mechanical Dimensions

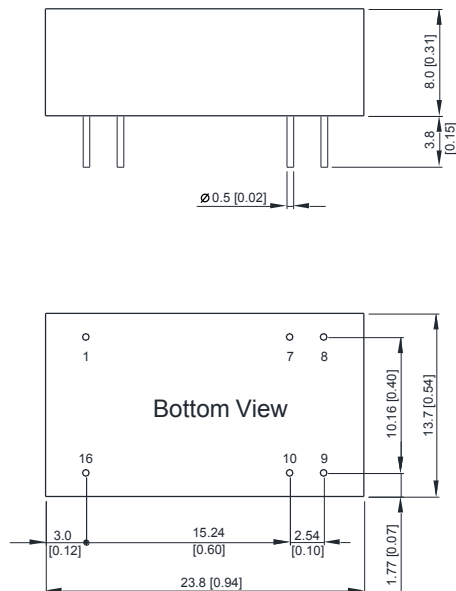

## Pin Connectors

Pin No.	Single Output	Dual Output
1	-Vin	-Vin
7	No Connection	No Connection
8	No Connection	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)  
X.XX±0.13 (X.XXX±0.005)
- Pin pitch tolerance: ±0.25 (±0.01)
- Pin dimension tolerance: ±0.1 (±0.004)

## WORLDWIDE OFFICES

## Americas

2900 S.Diablo Way  
Tempe, AZ 85282  
USA  
+1 888 412 7832

## Europe (UK)

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
+44 (0) 1384 842 211

## Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>™</sup>  
EMBEDDED TECHNOLOGIES

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2017 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)