




- ▼ 100% Avalanche Test
- ▼ Simple Drive Requirement
- ▼ Lower On-resistance
- ▼ RoHS Compliant




| | |
|--------------|--------------|
| BV_{DSS} | 250V |
| $R_{DS(ON)}$ | 68m Ω |
| I_D | 36A |

Description

AP30N30 from APEC provide the designer with the best combination of fast switching , low on-resistance and cost-effectiveness .

The TO-3P package is preferred for commercial & industrial applications with higher power level preclusion than TO-220 device.



Absolute Maximum Ratings

| Symbol | Parameter | Rating | Units |
|-----------------------|--|------------|---------------|
| V_{DS} | Drain-Source Voltage | 250 | V |
| V_{GS} | Gate-Source Voltage | ± 30 | V |
| $I_D@T_C=25^\circ C$ | Continuous Drain Current, V_{GS} @ 10V | 36 | A |
| $I_D@T_C=100^\circ C$ | Continuous Drain Current, V_{GS} @ 10V | 23 | A |
| I_{DM} | Pulsed Drain Current ¹ | 144 | A |
| $P_D@T_C=25^\circ C$ | Total Power Dissipation | 208 | W |
| | Linear Derating Factor | 1.7 | W/ $^\circ C$ |
| E_{AS} | Single Pulse Avalanche Energy ³ | 450 | mJ |
| I_{AR} | Avalanche Current | 30 | A |
| T_{STG} | Storage Temperature Range | -55 to 150 | $^\circ C$ |
| T_J | Operating Junction Temperature Range | -55 to 150 | $^\circ C$ |

Thermal Data

| Symbol | Parameter | Value | Units |
|--------|-------------------------------------|----------|--------------|
| Rthj-c | Thermal Resistance Junction-case | Max. 0.6 | $^\circ C/W$ |
| Rthj-a | Thermal Resistance Junction-ambient | Max. 40 | $^\circ C/W$ |



AP30N30W

Electrical Characteristics @T_j=25°C (unless otherwise specified)

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|-------------------------------------|--|--|------|------|------|-------|
| BV _{DSS} | Drain-Source Breakdown Voltage | V _{GS} =0V, I _D =1mA | 250 | - | - | V |
| ΔBV _{DSS} /ΔT _j | Breakdown Voltage Temperature Coefficient | Reference to 25°C, I _D =1mA | - | 0.24 | - | V/°C |
| R _{DS(ON)} | Static Drain-Source On-Resistance ² | V _{GS} =10V, I _D =15A | - | - | 68 | mΩ |
| V _{GS(th)} | Gate Threshold Voltage | V _{DS} =V _{GS} , I _D =250uA | 1.5 | - | 3.5 | V |
| g _{fs} | Forward Transconductance | V _{DS} =10V, I _D =15A | - | 23 | - | S |
| I _{DSS} | Drain-Source Leakage Current (T _j =25°C) | V _{DS} =250V, V _{GS} =0V | - | - | 10 | uA |
| | Drain-Source Leakage Current (T _j =150°C) | V _{DS} =200V, V _{GS} =0V | - | - | 100 | uA |
| I _{GSS} | Gate-Source Leakage | V _{GS} = ±30V | - | - | ±1 | uA |
| Q _g | Total Gate Charge ² | I _D =15A | - | 63 | 100 | nC |
| Q _{gs} | Gate-Source Charge | V _{DS} =200V | - | 19 | - | nC |
| Q _{gd} | Gate-Drain ("Miller") Charge | V _{GS} =10V | - | 14 | - | nC |
| t _{d(on)} | Turn-on Delay Time ² | V _{DS} =125V | - | 28 | - | ns |
| t _r | Rise Time | I _D =15A | - | 36 | - | ns |
| t _{d(off)} | Turn-off Delay Time | R _G =10Ω, V _{GS} =10V | - | 84 | - | ns |
| t _f | Fall Time | R _D =8.3Ω | - | 45 | - | ns |
| C _{iss} | Input Capacitance | V _{GS} =0V | - | 4290 | 6900 | pF |
| C _{oss} | Output Capacitance | V _{DS} =25V | - | 550 | - | pF |
| C _{rss} | Reverse Transfer Capacitance | f=1.0MHz | - | 6 | - | pF |
| R _g | Gate Resistance | f=1.0MHz | - | 1.9 | 3 | Ω |

Source-Drain Diode

| Symbol | Parameter | Test Conditions | Min. | Typ. | Max. | Units |
|-----------------|------------------------------------|--|------|------|------|-------|
| V _{SD} | Forward On Voltage ² | I _S =36A, V _{GS} =0V | - | - | 1.5 | V |
| t _{rr} | Reverse Recovery Time ² | I _S =15A, V _{GS} =0V | - | 235 | - | ns |
| Q _{rr} | Reverse Recovery Charge | dI/dt=100A/μs | - | 2.24 | - | μC |

Notes:

1. Pulse width limited by safe operating area.
2. Pulse width ≤300us, duty cycle ≤2%.
3. Starting T_j=25°C, V_{DD}=50V, L=1mH, R_G=25Ω, I_{AS}=30A.

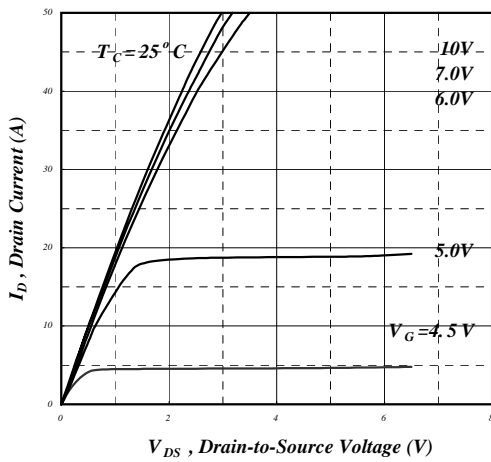


Fig 1. Typical Output Characteristics

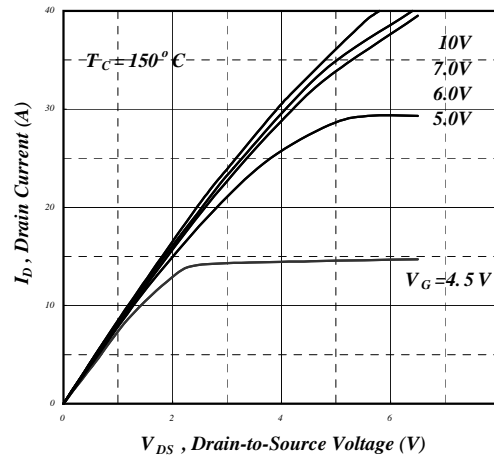


Fig 2. Typical Output Characteristics

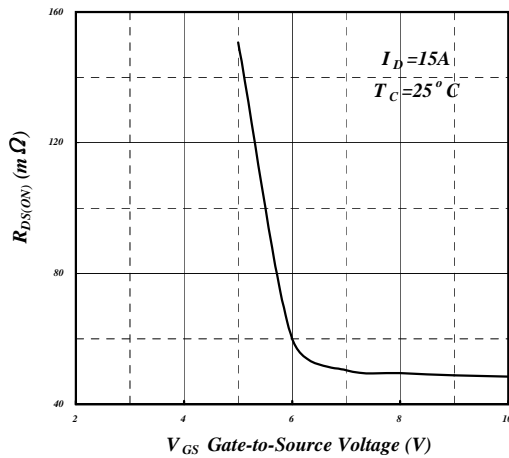


Fig 3. On-Resistance v.s. Gate Voltage

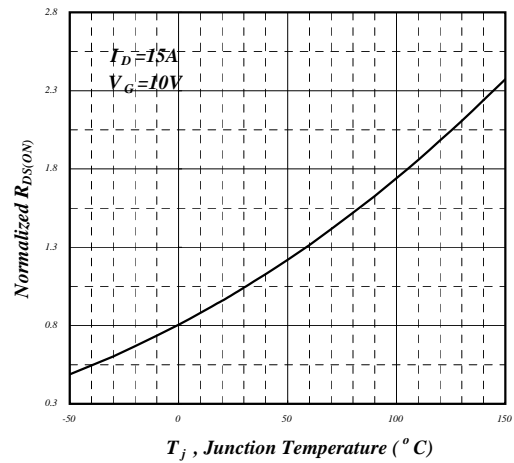


Fig 4. Normalized On-Resistance v.s. Junction Temperature

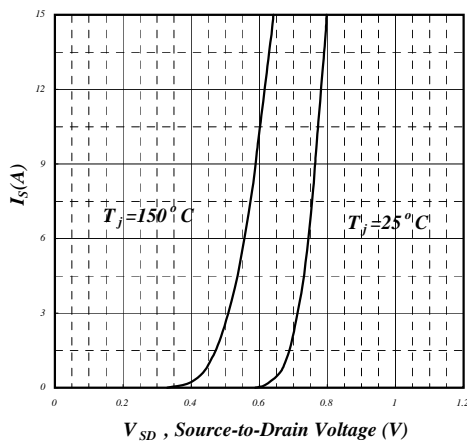


Fig 5. Forward Characteristic of Reverse Diode

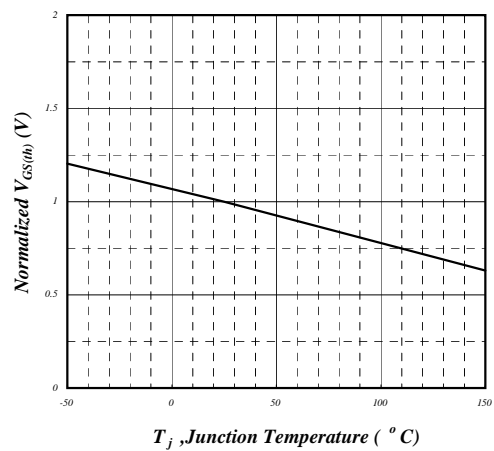


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

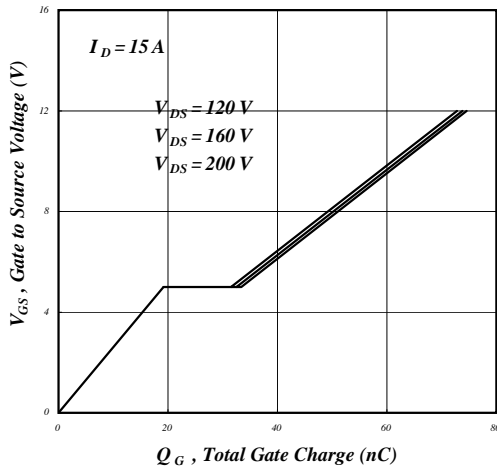


Fig 7. Gate Charge Characteristics

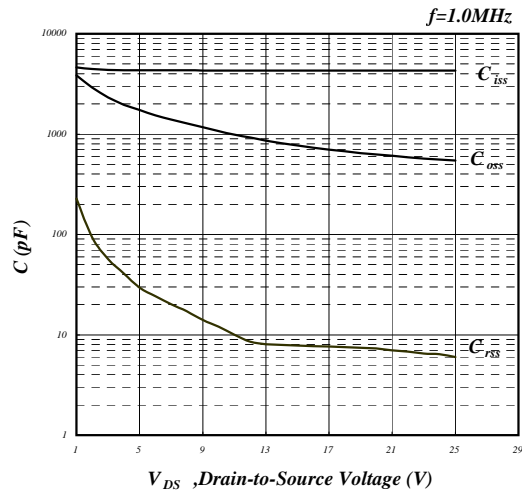


Fig 8. Typical Capacitance Characteristics

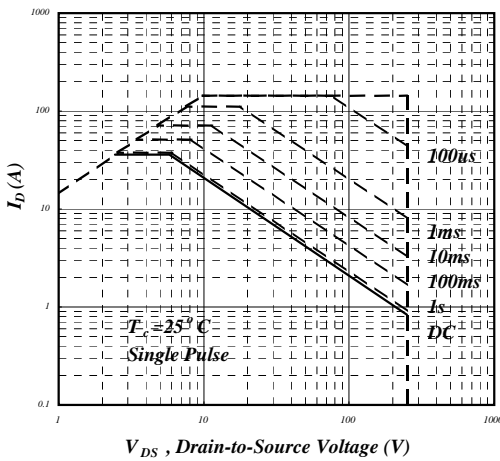


Fig 9. Maximum Safe Operating Area

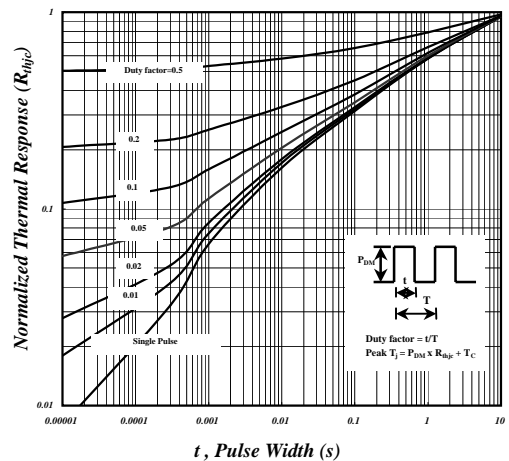


Fig 10. Effective Transient Thermal Impedance

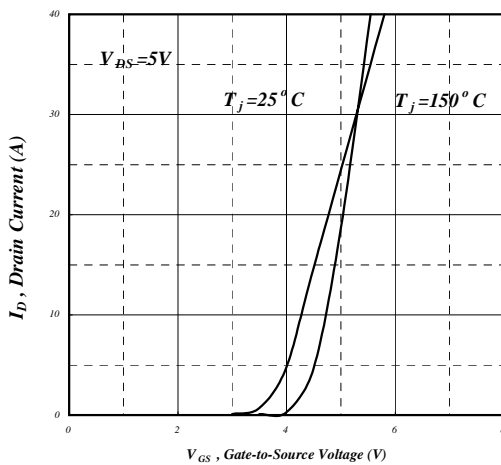


Fig 11. Transfer Characteristics

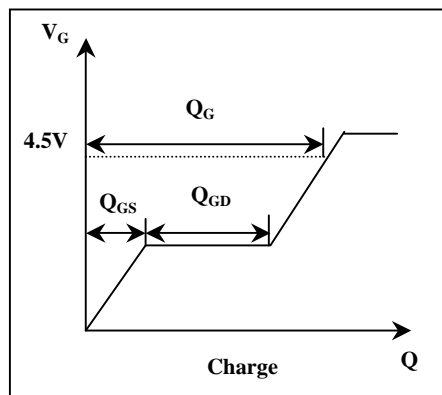


Fig 12. Gate Charge Waveform