



Quad, 12-Bit DAC Voltage Output with Readback

DAC-8412/DAC-8413


FEATURES

- +5 to ± 15 Volt Operation
- Unipolar or Bipolar Operation
- True Voltage Output
- Double-Buffered Inputs
- Reset to Min or Center Scale
- Fast Bus Access Time
- Readback

APPLICATIONS

- Automatic Test Equipment
- Digitally Controlled Calibration
- Servo Controls
- Process Control Equipment

FUNCTIONAL BLOCK DIAGRAM

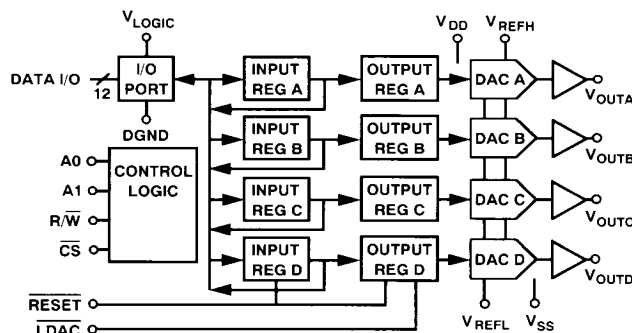

GENERAL DESCRIPTION

The DAC-8412 and DAC-8413 are quad, 12-bit, voltage output DACs with readback capability. Built using a complementary BiCMOS process, these monolithic DACs offer the user very high package density.


Output voltage swing is set by the two reference inputs V_{REFH} and V_{REFL} . By setting the V_{REFL} input to 0 volts and V_{REFH} to a positive voltage, the DAC will provide a unipolar positive output range. A similar configuration with V_{REFH} at 0 volts and V_{REFL} at a negative voltage will provide a unipolar negative output range. Bipolar outputs are configured by connecting both V_{REFH} and V_{REFL} to nonzero voltages. This method of setting output voltage range has advantages over other bipolar offsetting methods because it is not dependent on internal and external resistors with different temperature coefficients.

Digital controls allow the user to load or read back data from any DAC, load any DAC and transfer data to all DACs at one time.

An active low \overline{RESET} loads all DAC output registers to mid-scale for the DAC-8412 and zero scale for the DAC-8413.

The DAC-8412/DAC-8413 are available in 28-pin plastic DIP, cerdip, PLCC and LCC packages. They can be operated from a wide variety of supply and reference voltages with supplies ranging from single +5 volt to ± 15 volts, and references from +2.5 to ± 10 volts. Power dissipation is less than 330 mW with ± 15 volt supplies and only 60 mW with a +5 volt supply.

For MIL-STD-883 applications, contact your local ADI sales office for the DAC-8412/DAC-8413/883 data sheet which specifies operation over the -55°C to $+125^{\circ}\text{C}$ temperature range.

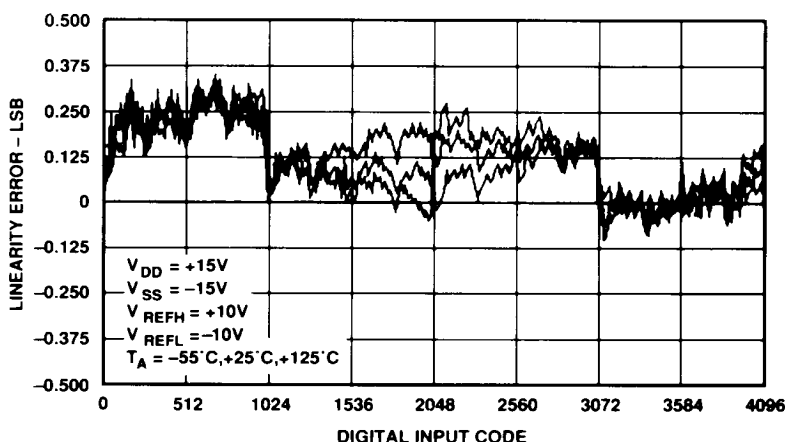

REV. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 617/329-4700 Fax: 617/326-8703 Twx: 710/394-6577
Telex: 924491 Cable: ANALOG NORWOODMASS

DAC-8412/DAC-8413—SPECIFICATIONS

ELECTRICAL CHARACTERISTICS (@ $V_{DD} = +15.0\text{ V}$, $V_{SS} = -15.0\text{ V}$, $V_{LOGIC} = +5.0\text{ V}$, $V_{REFH} = +10.0\text{ V}$, $V_{REFL} = -10.0\text{ V}$, $-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$ unless otherwise specified. See Note 1 for supply variations.)

Parameter	Symbol	Conditions	Min	Typ	Max	Units	
Integral Linearity “E”	INL	Monotonic Over Temperature R _L = 2 kΩ	−1	0.25	±0.5	LSB	
Integral Linearity “F”	INL				±1	LSB	
Differential Linearity	DNL					LSB	
Min Scale Error	V _{ZSE}					±2	LSB
Full-Scale Error	V _{FSE}			R _L = 2 kΩ		±2	LSB
Min Scale Tempco	TCV _{ZSE}			R _L = 2 kΩ	15		ppm/°C
Full-Scale Tempco	TCV _{FSE}			R _L = 2 kΩ	20		ppm/°C
MATCHING PERFORMANCE							
Linearity Matching				±1		LSB	
REFERENCE							
Positive Reference Input Range	I _{REFH} I _{REFL}	Note 2	V _{REFL} + 2.5		V _{DD} − 2.5	V	
Negative Reference Input Range		Note 2	−10		V _{REFH} − 2.5	V	
Reference High Input Current			−2.75	+1.5	+2.75	mA	
Reference Low Input Current			0	+2	+2.75	mA	
AMPLIFIER CHARACTERISTICS							
Output Current	I _{OUT}		−5		+5	mA	
Settling Time	t _S	to 0.01%		6		μsec	
Slew Rate	SR	10% to 90%		2.2		V/μsec	
LOGIC CHARACTERISTICS							
Logic Input High Voltage	V _{INH}	T _A = +25°C	2.4			V	
Logic Input Low Voltage	V _{INL}	T _A = +25°C			0.8	V	
Logic Output High Voltage	V _{OH}	I _{OH} = +0.4 mA	2.4			V	
Logic Output Low Voltage	V _{OL}	I _{OL} = −1.6 mA			0.4	V	
Logic Input Current	I _{IN}			8	1	μA	
Input Capacitance	C _{IN}			>72		pF	
Crosstalk				160		dB	
Large Signal Bandwidth		−3 dB, V _{REFH} = 0 to +10 V p-p				kHz	
LOGIC TIMING CHARACTERISTICS							
WRITE		Note 3					
Chip Select Write Pulse Width	t _{WCS}	t _{WCS} = 80 ns t _{WCS} = 80 ns	80	40		ns	
Write Setup	t _{WS}		0			ns	
Write Hold	t _{WH}		0			ns	
Address Setup	t _{AS}		0			ns	
Address Hold	t _{AH}		0			ns	
Load Setup	t _{LS}		70	30		ns	
Load Hold	t _{LH}	30	10		ns		
Write Data Setup	t _{WDS}	t _{WCS} = 80 ns	10			ns	
Write Data Hold	t _{WDH}	t _{WCS} = 80 ns	10			ns	
Load Pulse Width	t _{LWD}		180	130		ns	
Reset Pulse Width	t _{RESET}		130	100		ns	
READ							
Chip Select Read Pulse Width	t _{RCS}	t _{RCS} = 130 ns t _{RCS} = 130 ns C _L = 10 pF C _L = 100 pF	130	100		ns	
Read Data Hold	t _{RDH}		0			ns	
Read Data Setup	t _{RDS}		20			ns	
Data to Hi Z	t _{DZ}			150		ns	
Chip Select to Data	t _{CSD}			120	160	ns	
SUPPLY CHARACTERISTICS							
Power Supply Sensitivity	PSS	14.25 V ≤ V _{DD} ≤ 15.75 V			150	ppm/V	
Positive Supply Current	I _{DD}	V _{REFH} = +2.5 V		8.5	12	mA	
Negative Supply Current	I _{SS}		−10	−6.5		mA	
Power Dissipation	P _{DISS}				330	mW	

NOTES

¹All supplies can be varied $\pm 5\%$, and operation is guaranteed. Device is tested with nominal supplies.

²Operation is guaranteed over this reference range, but linearity is neither tested nor guaranteed.

³All input control signals are specified with $t_r = t_f = 5\text{ ns}$ (10% to 90% of $+5\text{ V}$) and timed from a voltage level of 1.6 V .

Specifications subject to change without notice.

ELECTRICAL CHARACTERISTICS (@ $V_{DD} = V_{LOGIC} = +5.0\text{ V} \pm 5\%$, $V_{SS} = 0.0\text{ V}$, $V_{REFH} = 2.5\text{ V}$, $V_{REFL} = 0.0\text{ V}$, and $V_{SS} = -5.0\text{ V} \pm 5\%$, $V_{REFL} = -2.5\text{ V}$, $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ unless otherwise) specified. See Note 1 for supply variations.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Integral Linearity "E"	INL			1/2	± 1	LSB
Integral Linearity "F"	INL				± 2	LSB
Integral Linearity "E"	INL	$V_{SS} = 0.0\text{ V}^2$			± 2	LSB
Integral Linearity "F"	INL	$V_{SS} = 0.0\text{ V}^2$			± 4	LSB
Differential Linearity	DNL	Monotonic Over Temp	-1			LSB
Min Scale Error	V_{ZSE}	$V_{SS} = -5.0\text{ V}$			± 4	LSB
Full-Scale Error	V_{FSE}	$V_{SS} = -5.0\text{ V}$			± 4	LSB
Min Scale Error	V_{ZSE}	$V_{SS} = 0.0\text{ V}$			± 8	LSB
Full-Scale Error	V_{FSE}	$V_{SS} = 0.0\text{ V}$			± 8	LSB
Min Scale Tempco	TCV_{ZSE}			100		ppm/ $^\circ\text{C}$
Full-Scale Tempco	TCV_{FSE}			100		ppm/ $^\circ\text{C}$
MATCHING PERFORMANCE						
Linearity Matching				± 1		LSB
REFERENCE						
Positive Reference Input Range		Note 3	$V_{REFL} + 2.5$		$V_{DD} - 2.5$	V
Negative Reference Input Range		$V_{SS} = 0.0\text{ V}$	0		$V_{REFH} - 2.5$	V
Negative Reference Input Range		$V_{SS} = -5.0\text{ V}$	-2.5		$V_{REFH} - 2.5$	V
Reference High Input Current	I_{REFH}	Code 000H	-1.0		+1.0	mA
AMPLIFIER CHARACTERISTICS						
Output Current	I_{OUT}		-1.25		+1.25	mA
Settling Time	t_s	to 0.01%		6		μs
Slew Rate	SR	10% to 90%		2.2		V/ μs
LOGIC CHARACTERISTICS						
Logic Input High Voltage	V_{INH}	$T_A = +25^\circ\text{C}$	2.4			V
Logic Input Low Voltage	V_{INL}	$T_A = +25^\circ\text{C}$			0.8	V
Logic Output High Voltage	V_{OH}	$I_{OH} = +0.4\text{ mA}$	2.4			V
Logic Output Low Voltage	V_{OL}	$I_{OL} = -1.6\text{ mA}$			0.45	V
Logic Input Current	I_{IN}				1	μA
Input Capacitance	C_{IN}			8		pF
LOGIC TIMING CHARACTERISTICS						
WRITE						
Chip Select Write Pulse Width	t_{WCS}	Note 4	150	90		ns
Write Setup	t_{WS}	$t_{WCS} = 150\text{ ns}$	0			ns
Write Hold	t_{WH}	$t_{WCS} = 150\text{ ns}$	0			ns
Address Setup	t_{AS}		0			ns
Address Hold	t_{AH}		0			ns
Load Setup	t_{LS}		70	30		ns
Load Hold	t_{LH}		50	20		ns
Write Data Setup	t_{WDS}	$t_{WCS} = 150\text{ ns}$	20			ns
Write Data Hold	t_{WDH}	$t_{WCS} = 150\text{ ns}$	0			ns
Load Pulse Width	t_{LWD}		180	130		ns
Reset Pulse Width	t_{RESET}		150	110		ns
READ						
Chip Select Read Pulse Width	t_{RCS}		170	120		ns
Read Data Hold	t_{RDH}	$t_{RCS} = 170\text{ ns}$	0			ns
Read Data Setup	t_{RDS}	$t_{RCS} = 170\text{ ns}$	20			ns
Data to Hi Z	t_{DZ}	$C_L = 10\text{ pF}$		200		ns
Chip Select to Data	t_{CSD}	$C_L = 100\text{ pF}$		220	320	ns
SUPPLY CHARACTERISTICS						
Power Supply Sensitivity	PSS			100		ppm/V
Positive Supply Current	I_{DD}			7	12	mA
Negative Supply Current	I_{SS}	$V_{SS} = -5.0\text{ V}$	-10			mA

NOTES

¹All supplies can be varied $\pm 5\%$, and operation is guaranteed. Device is tested with $V_{DD} = +4.75\text{ V}$.

²For single supply operation only ($V_{REFL} = 0.0\text{ V}$, $V_{SS} = 0.0\text{ V}$): Due to internal offset errors, INL and DNL are measured beginning at code 2 (002_H).

³Operation is guaranteed over this reference range, but linearity is neither tested nor guaranteed.

⁴All input control signals are specified with $t_r = t_f = 5\text{ ns}$ (10% to 90% of +5 V) and timed from a voltage level of 1.6 V.

Specifications subject to change without notice.

DAC-8412/DAC-8413

WAFER TEST LIMITS (@ $V_{DD} = +15.0\text{ V}$, $V_{SS} = -15.0\text{ V}$, $V_{LOGIC} = +5.0\text{ V}$, $V_{REFH} = +10.0\text{ V}$, $V_{REFL} = -10.0\text{ V}$, $T_A = +25^\circ\text{C}$ unless otherwise specified.)

Parameter	Symbol	Conditions	DAC-8412GBC DAC-8413GBC Limit	Units
Integral Nonlinearity	INL		± 1	LSB max
Differential Nonlinearity	DNL		± 1	LSB max
Min Scale Offset	V_{ZSE}		± 1	LSB max
Full-Scale Offset	C_{FSE}		± 1	LSB max
Logic Input High Voltage	V_{INH}		2.4	V min
Logic Input Low Voltage	V_{INL}		0.8	V max
Logic Input Current	I_{IN}		1	μA max
Logic Output High Voltage	V_{OH}	$I_{OH} = +0.4\text{ mA}$	2.4	V min
Logic Output Low Voltage	V_{OL}	$I_{OL} = -1.6\text{ mA}$	0.4	V max
Positive Supply Current	I_{DD}	$V_{REFH} = +2.5\text{ V}$	12	mA max
Negative Supply Current	I_{SS}		-10	mA min

NOTE

Electrical tests are performed at wafer probe to the limits shown. Due to variations in assembly methods and normal yield loss, yield after packaging is not guaranteed for standard product dice. Consult factory to negotiate specifications based on dice lot qualification through sample lot assembly and testing.

ABSOLUTE MAXIMUM RATINGS

($T_A = +25^\circ\text{C}$ unless otherwise noted)

V_{SS} to V_{DD}	-0.3 V, +33.0 V
V_{SS} to V_{LOGIC}	-0.3 V, +33.0 V
V_{LOGIC} to DGND	-0.3 V, +18.0 V
V_{SS} to V_{REFL}	-0.3 V, $+V_{SS}-2.0\text{ V}$
V_{REFH} to V_{DD}	+2.0 V, +33.0 V
V_{REFH} to V_{REFL}	+2.0 V, $V_{SS}-V_{DD}$
Current into Any Pin ⁴	$\pm 15\text{ mA}$
Digital Input Voltage to DGND	-0.3 V, $V_{LOGIC} + 0.3\text{ V}$
Digital Output Voltage to DGND	-0.3 V, +7.0 V
Operating Temperature Range	
ET, FT, EP, FP, FPC, FTC	-40°C to $+85^\circ\text{C}$
AT, BT, BTC	-55°C to $+125^\circ\text{C}$
Dice Junction Temperature	$+150^\circ\text{C}$
Storage Temperature	-65°C to $+150^\circ\text{C}$
Power Dissipation Package	1000 mW
Lead Temperature (Soldering, 60 sec)	$+300^\circ\text{C}$

Thermal Resistance

Package Type	θ_{JA} ¹	θ_{JC}	Units
28-Pin Hermetic DIP (T)	50	7	$^\circ\text{C/W}$
28-Pin Plastic DIP (P)	48	22	$^\circ\text{C/W}$
28-Lead Hermetic Leadless Chip Carrier (TC)	70	28	$^\circ\text{C/W}$
28-Lead Plastic Leaded Chip Carrier (PC)	63	25	$^\circ\text{C/W}$


NOTE

¹ θ_{JA} is specified for worst case mounting conditions, i.e., θ_{JA} is specified for device in socket.

CAUTION

- Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation at or above this specification is not implied. Exposure to the above maximum rating conditions for extended periods may affect device reliability.
- Digital inputs and outputs are protected, however, permanent damage may occur on unprotected units from high-energy electrostatic fields. Keep units in conductive foam or packaging at all times until ready to use. Use proper antistatic handling procedures.
- Remove power before inserting or removing units from their sockets.
- Analog outputs are protected from short circuit to ground or either supply.

DICE CHARACTERISTICS

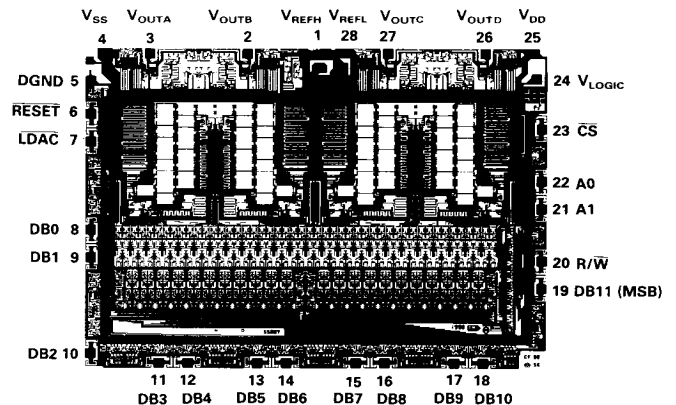

DIE SIZE 0.225 x 0.165 INCH, 37,125 SQ. MILS
(5.715 x 4.191 mm, 23.95 sq. mm)




ORDERING INFORMATION*


INL (LSB)	Military† Temperature -55°C to +125°C	Extended Industrial† Temperature -40°C to +85°C	Package
±1	DAC8412BTC/883	DAC8412FPC	PLCC
±1		DAC8412FTC	LCC
±1.5		LCC	LCC
±0.5	DAC8412AT/883	DAC8412ET	Cerdip
±0.75			Cerdip
±1		DAC8412FT	Cerdip
±1.5	DAC8412BT/883		Cerdip
±0.5		DAC8412EP	Plastic
±1		DAC8412FP	Plastic
±1	DAC8413BTC/883	DAC8412GBC	Dice
±1		DAC8413FPC	PLCC
±1		DAC8413FTC	LCC
±1.5	DAC8413AT/883		Cerdip
±0.5		DAC8413ET	Cerdip
±0.75			Cerdip
±1	DAC8413BT/883	DAC8413FT	Cerdip
±1.5			Cerdip
±0.5		DAC8413EP	Plastic
±1		DAC8413FP	Plastic
±1		DAC8413GBC	Dice

*Burn-in is available on extended industrial temperature range parts in cerdip and LCC packages. For ordering information, see data book.

†A complete /883 data sheet is available. For availability and burn-in information, contact your local sales office.

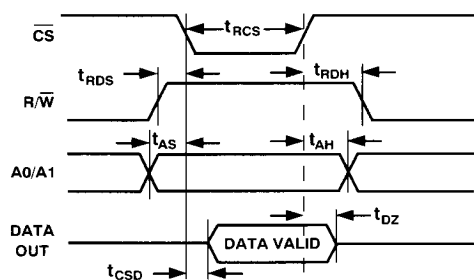


Data Output (Read) Timing

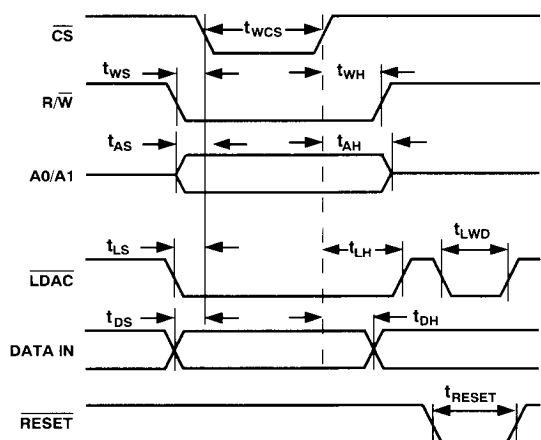


Data WRITE (Input and Output Registers) Timing

PIN CONFIGURATIONS


DIP Pinout

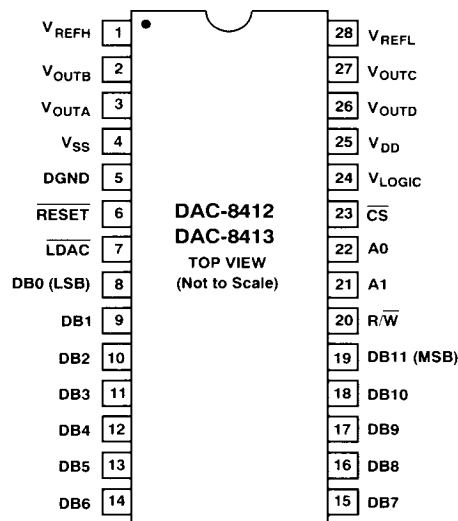


PLCC Pinout

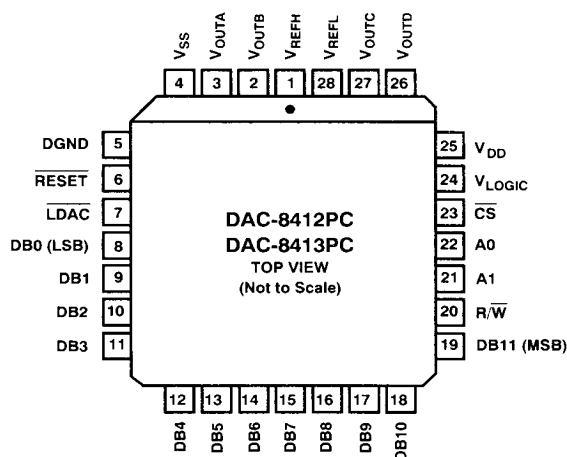

LCC Pinout

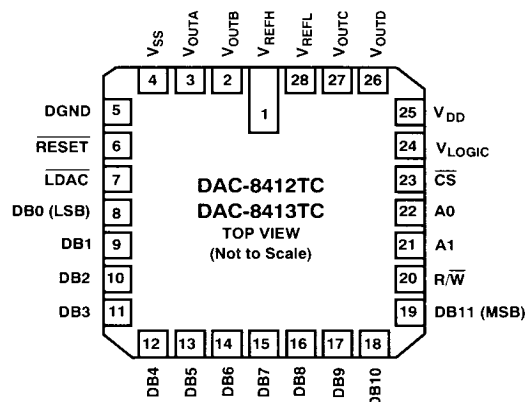

DAC-8412/DAC-8413

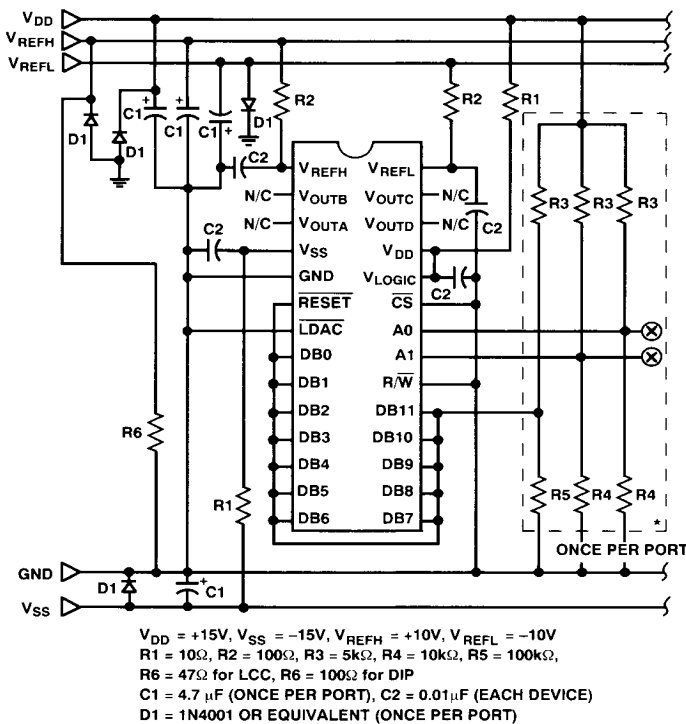

DAC-8412/DAC-8413 Burn-In Diagram

OPERATION

Introduction

The DAC-8412 and DAC-8413 are quad, voltage output, 12-bit DACs featuring a 12-bit data bus with read-back capability. The only differences between the DAC-8412 and DAC-8413 are the reset functions. The DAC-8412 resets to midscale (code 800_H) and the DAC-8413 resets to minimum scale (code 000_H).

The ability to operate from a single +5 volt only supply is a unique feature of these DACs.

Operation of the DAC-8412 and DAC-8413 can be viewed by dividing the system into three separate functional groups: the digital I/O and logic, the digital to analog converters and the output amplifiers.

DACs

Each DAC is a voltage switched, high impedance ($R = 50 k\Omega$), R-2R ladder configuration. Each 2R resistor is driven by a pair of switches that connect the resistor to either V_{REFH} or V_{REFL} .

Reference Inputs

All four DACs share common reference high (V_{REFH}) and reference low (V_{REFL}) inputs. The voltages applied to these reference inputs set the output high and low voltage limits of all four of the DACs. Each reference input has voltage restrictions with respect to the other reference and to the power supplies. The V_{REFL} can be set at any voltage between V_{SS} and $V_{REFH} - 2.5$ volts, and V_{REFH} can be set to any value between $+V_{DD} - 2.5$ volts and $V_{REFL} + 2.5$ volts. Note that because of these restrictions the DAC-8412 references cannot be inverted (i.e., V_{REFL} cannot be greater than V_{REFH}).

It is important to note that the DAC-8412's V_{REFH} input both sinks and sources current. Also the input current of both V_{REFH} and V_{REFL} are code dependent. Many references have limited current sinking capability and must be buffered with an amplifier to drive V_{REFH} . The V_{REFL} has no such special requirements.

It is recommended that the reference inputs be bypassed with $0.2 \mu F$ capacitors when operating with ± 10 volt references.


Digital I/O

See Table I for digital control logic truth table. Digital I/O consists of a 12-bit wide bidirectional data bus, two register select inputs, A0 and A1, a R/W input, a RESET input, a Chip Select (CS), and a Load DAC (LDAC) input. Control of the DACs and bus direction is determined by these inputs as shown in Table I. Digital data bits are labeled with the MSB defined as data bit "11" and the LSB as data bit "0." All digital pins are TTL/CMOS compatible.

Table I. DAC-8412/DAC-8413 Logic Table

A1	A0	R/W	CS	RS	LDAC	INPUT REG	OUTPUT REG	MODE	DAC
L	L	L	L	H	L	WRITE	WRITE	WRITE	A
L	H	L	L	H	L	WRITE	WRITE	WRITE	B
H	L	L	L	H	L	WRITE	WRITE	WRITE	C
H	H	L	L	H	L	WRITE	WRITE	WRITE	D
L	L	L	L	H	H	WRITE	HOLD	WRITE INPUT	A
L	H	L	L	H	H	WRITE	HOLD	WRITE INPUT	B
H	L	L	L	H	H	WRITE	HOLD	WRITE INPUT	C
H	H	L	L	H	H	WRITE	HOLD	WRITE INPUT	D
L	L	H	L	H	H	READ	HOLD	READ INPUT	A
L	H	H	L	H	H	READ	HOLD	READ INPUT	B
H	L	H	L	H	H	READ	HOLD	READ INPUT	C
H	H	H	L	H	H	READ	HOLD	READ INPUT	D
X	X	X	H	H	L	HOLD	Update all output registers		All
X	X	X	H	H	H	HOLD	HOLD	HOLD	All
X	X	X	X	L	X	*All registers reset to mid/zero-scale			All
X	X	X	H	\uparrow	X	*All registers latched to mid/zero-scale			All

*DAC-8412 resets to midscale, and DAC-8413 resets to zero scale. L = Logic Low; H = Logic High; X = Don't Care.

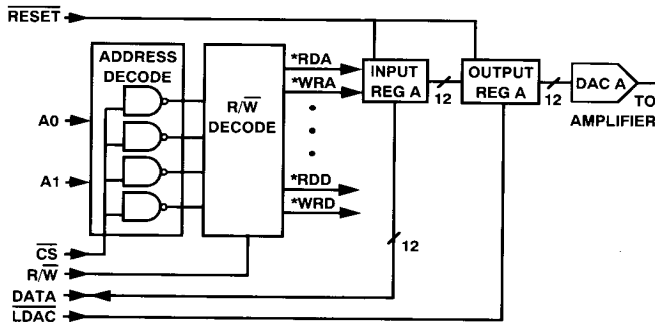

*NOTE: THE SIGNALS RDA, WRA, ETC., ARE INTERNAL CONTROL SIGNALS. THEY ARE INCLUDED FOR CLARIFICATION ONLY.

Figure 1. I/O Logic Diagram

See Figure 1 for a simplified I/O logic diagram. The register select inputs A0 and A1 select individual DAC registers "A" (binary code 00) through "D" (binary code 11). Decoding of the registers is enabled by the \overline{CS} input. When \overline{CS} is high no decoding takes place, and neither the writing nor the reading of the input registers is enabled. The loading of the second bank of registers is controlled by the \overline{LDAC} input. By taking \overline{LDAC} low while \overline{CS} is high, all output registers can be updated simultaneously. Note that the t_{LWD} required pulse width for updating all DACs is a minimum of 170 ns.

The R/\overline{W} input, when enabled by \overline{CS} , controls the writing to and reading from the input register.

Coding

Both the DAC-8412 and DAC-8413 use binary coding. The output voltage can be calculated by:

$$V_{OUT} = V_{REFL} + \frac{(V_{REFH} - V_{REFL}) * N}{4096}$$

where N is the digital code in decimal.

RESET

The RESET function can be used either at power-up or at any time during the DAC's operation. The RESET function is independent of \overline{CS} . This pin is active LOW and sets the DAC output registers to either center code for the DAC-8412, or zero code for the DAC-8413. The reset to center code is most useful when the DAC is configured for bipolar references and an output of zero volts after reset is desired.

Supplies

Supplies required are V_{SS} , V_{DD} and V_{LOGIC} . The V_{SS} supply can be set between -15 volts and 0 volts. V_{DD} is the positive supply; its operating range is between +5 and +15 volts.

V_{LOGIC} is the digital output reference voltage for the readback function. It is normally connected to +5 volts. This pin is a logic reference input only. It does not supply current to the device. *If you are not using the readback function, V_{LOGIC} can be hard-wired to V_{DD} .* While V_{LOGIC} does not supply current to the DAC-8412, it does supply currents to the digital outputs when readback is used.

Amplifiers

Unlike many voltage output DACs, the DAC-8412 features buffered voltage outputs. Each output is capable of both sourcing and sinking 5 mA at ± 10 volts, eliminating the need for external amplifiers in most applications. These amplifiers are short circuit protected.

Careful attention to grounding is important to accurate operation of the DAC-8412. This is not because the DAC-8412 is more sensitive than other 12-bit DACs, but because with four outputs and two references there is greater potential for ground loops. Since the DAC-8412 has no analog ground, the ground must be specified with respect to the reference.

Reference Configurations

Output voltage ranges can be configured as either unipolar or bipolar, and within these choices a wide variety of options exists. The unipolar configuration can be either positive or negative voltage output, and the bipolar configuration can be either symmetrical or nonsymmetrical.

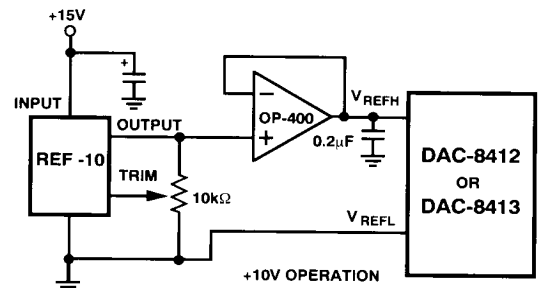


Figure 2. Unipolar +10 V Operation

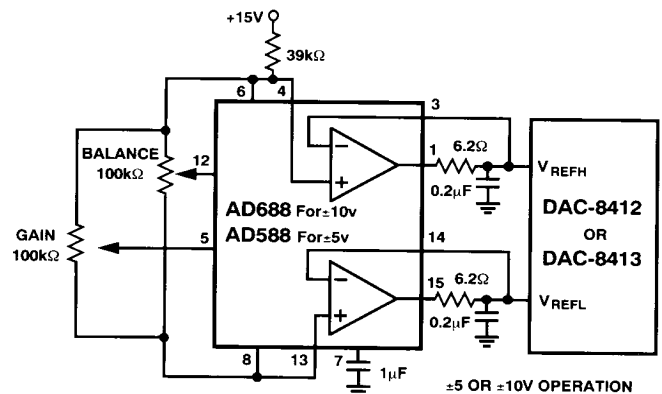


Figure 3. Symmetrical Bipolar Operation

Figure 3 (Symmetrical Bipolar Operation) shows the DAC-8412 configured for ± 10 volt operation. *Note: See the AD688 data sheet for a full explanation of reference operation.* Adjustments may not be required for many applications since the AD688 is a very high accuracy reference. However if additional adjustments are required, adjust the DAC-8412 full scale first. Begin by loading the digital full-scale code (FFF_H), and then adjust the Gain Adjust potentiometer to attain a DAC output voltage of 9.9976 volts. Then, adjust the Balance Adjust to set the center scale output voltage to 0.000 volts.

The 0.2 μF bypass capacitors shown at the reference inputs in Figure 3 should be used whenever ± 10 volt references are used. Applications with single references or references to ± 5 volts may not require the 0.2 μF bypassing. The 6.2 Ω resistor in series with the output of the reference amplifier is to keep the

DAC-8412/DAC-8413

amplifier from oscillating with the capacitive load. We have found that this is large enough to stabilize this circuit. Larger resistor values are acceptable, provided that the drop across the resistor doesn't exceed a V_{BE} . Assuming a minimum V_{BE} of 0.6 volts and a maximum current of 2.75 mA, then the resistor should be under 200 Ω for the loading of a single DAC-8412.

Using two separate references is not recommended. Having two references could cause different drifts with time and temperature; whereas with a single reference, most drifts will track.

Unipolar positive full-scale operation can usually be set with a reference with the correct output voltage. This is preferable to using a reference and dividing down to the required value. For a 10 volt full-scale output, the circuit can be configured as shown in Figure 2. In this configuration the full-scale value is

set first by adjusting the 10 k Ω resistor for a full-scale output of 9.9976 volts.

Figure 4 shows the DAC-8412 configured for -10 volt to zero volt operation. A REF-08 with a -10 volt output is connected directly to V_{REFL} for the reference voltage.

Single +5 Volt Supply Operation

For operation with a +5 volt supply, the reference should be set between 1.0 and +2.5 volts for optimum linearity. Note that lower reference voltages will have greater effects due to noise. Figure 5 shows a REF-43 used to supply a +2.5 volt reference voltage. The headroom of the reference and DAC are both sufficient to support a +5 volt supply with $\pm 5\%$ tolerance. V_{DD} and V_{LOGIC} should be connected to the same supply and separate bypassing to each pin should be used.

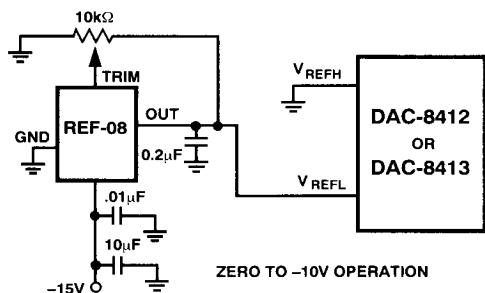


Figure 4. Unipolar -10 V Operation



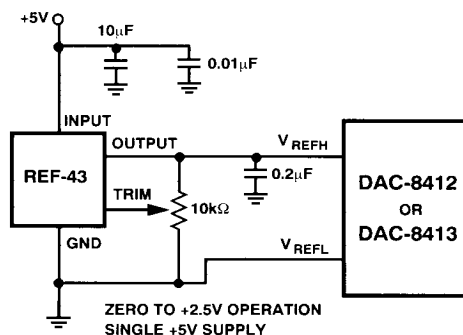


Figure 5. +5 V Single Supply Operation


Typical Performance Characteristics

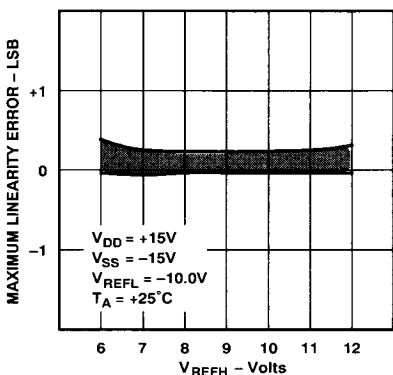


Differential Linearity vs. V_{REFH}

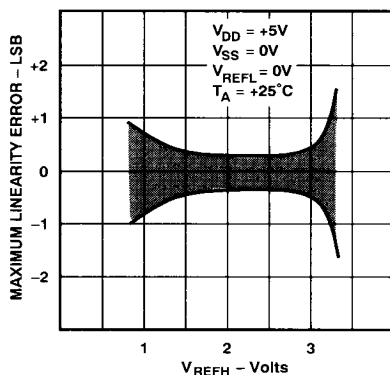


Differential Linearity vs. V_{REFH}

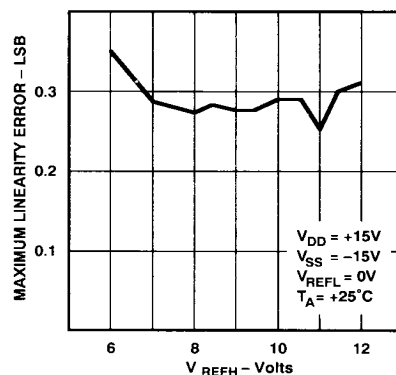


INL vs. V_{REFH}

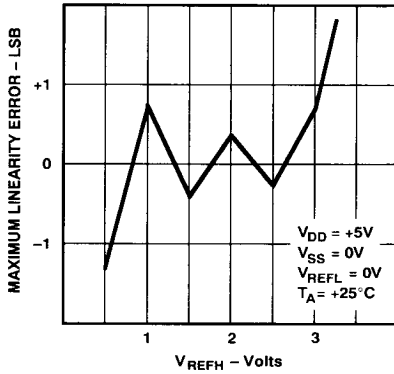


INL vs. V_{REFH}

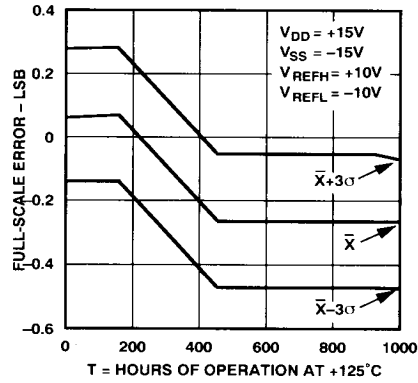


Full-Scale Error vs. Time Accelerated by Burn-In

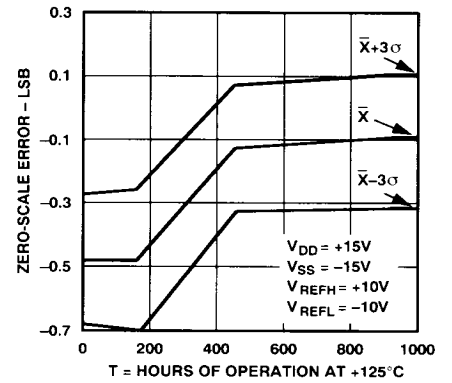


Zero-Scale Error vs. Time Accelerated by Burn-In

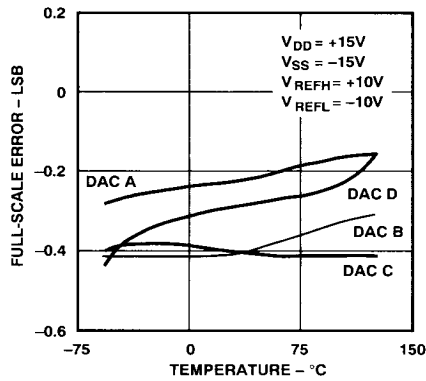


Full-Scale Error vs. Temperature

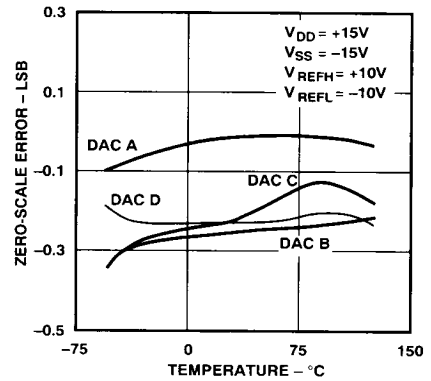

Zero-Scale Error vs. Temperature

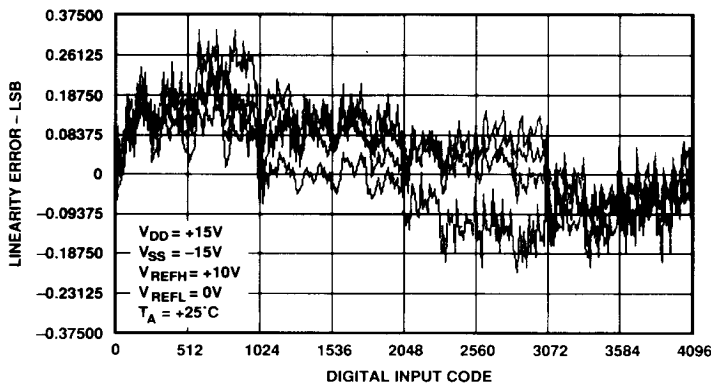


Channel-to-Channel Matching ($V_{SUPPLY} = \pm 15V$)

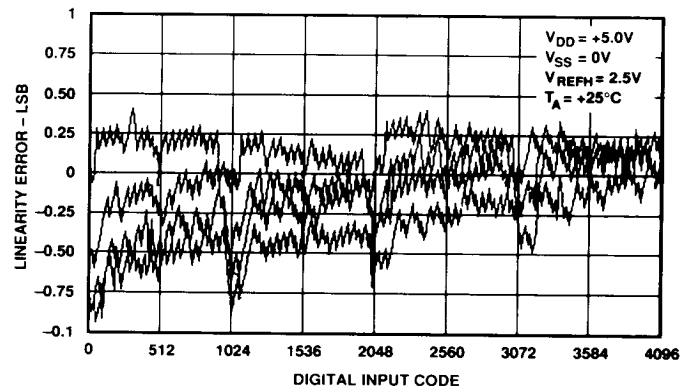


Channel-to-Channel Matching ($V_{SUPPLY} = \pm 5V$)


DAC-8412/DAC-8413

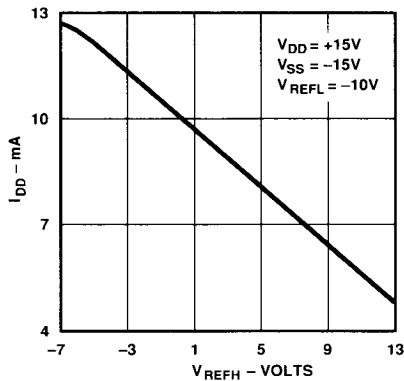


I_{DD} vs. V_{REFH} All DACs High

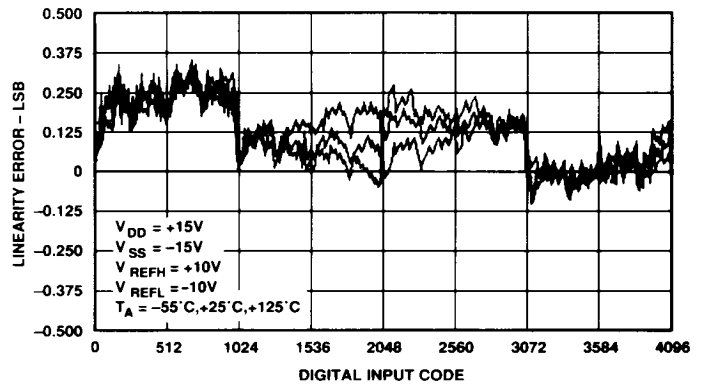


INL vs. Code

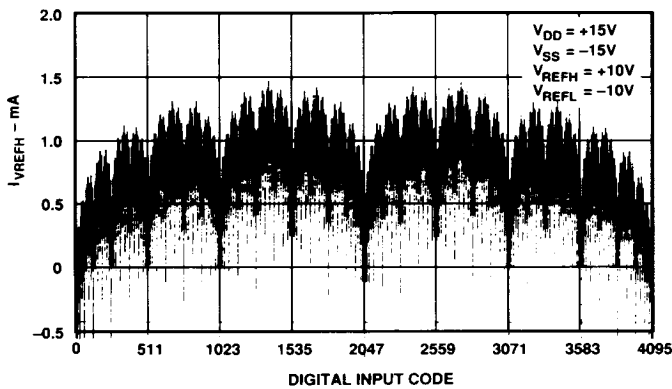


I_{VREFH} vs. Code

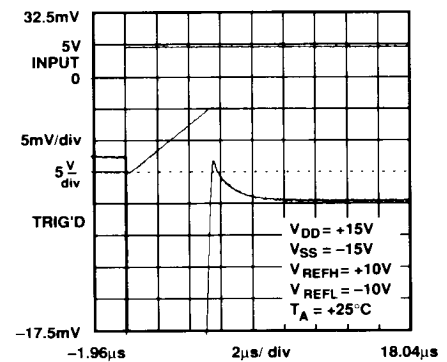


Settling Time (Positive)

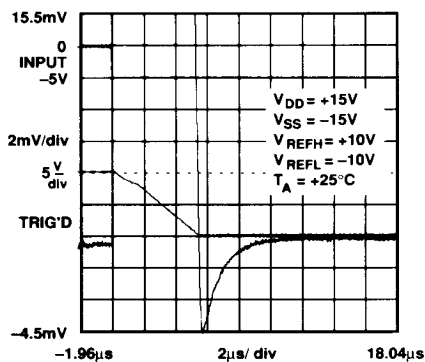


Settling Time (Negative)

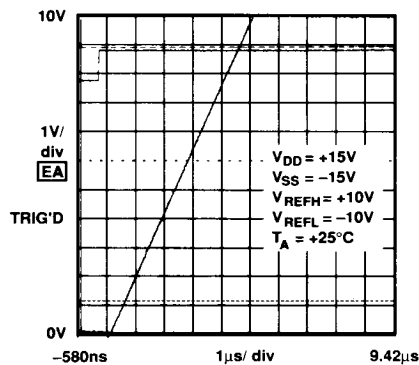


Positive Slew Rate

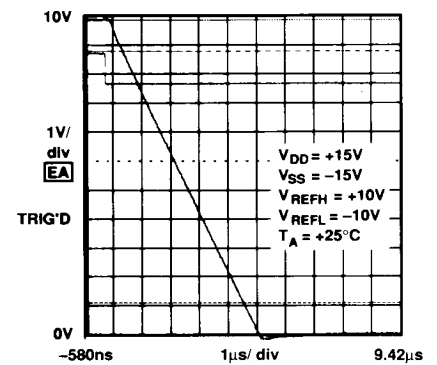


Negative Slew Rate

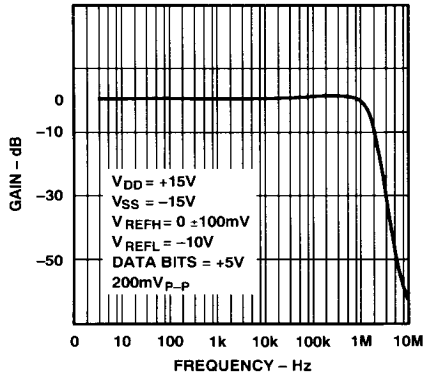


Small Signal Response

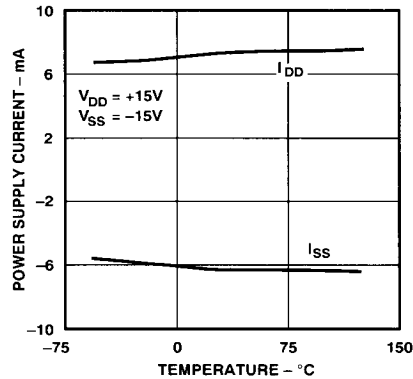

Power Supply Current vs. Temperature

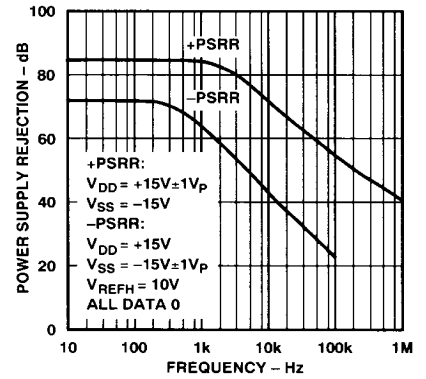

PSRR vs. Frequency

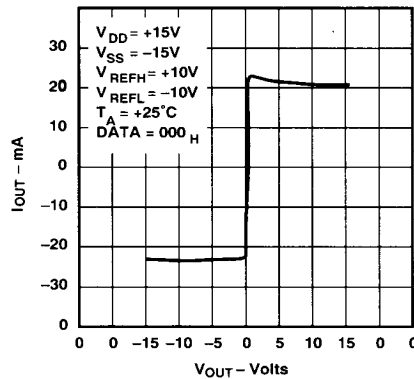


I_{OUT} vs. V_{OUT}

OUTLINE DIMENSIONS


Dimensions shown in inches and (mm).

28-Position Leadless Chip Carrier (TC Suffix)

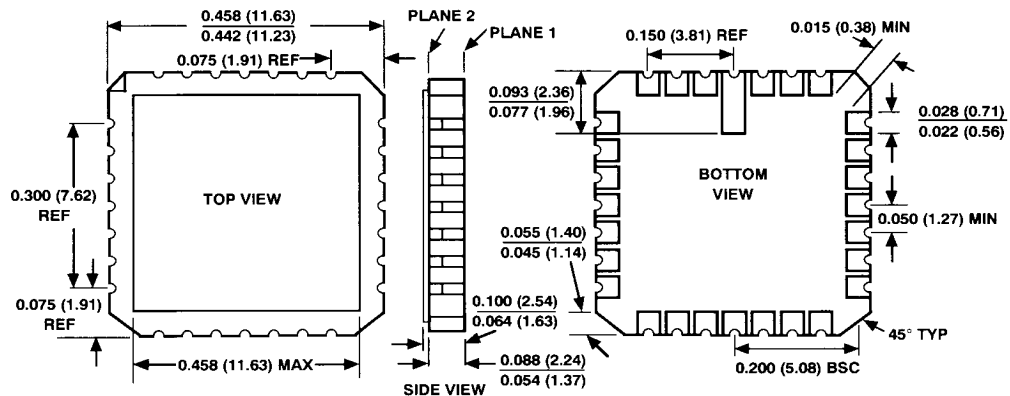


DAC-8412/DAC-8413

28-Lead PLCC (PC Suffix)

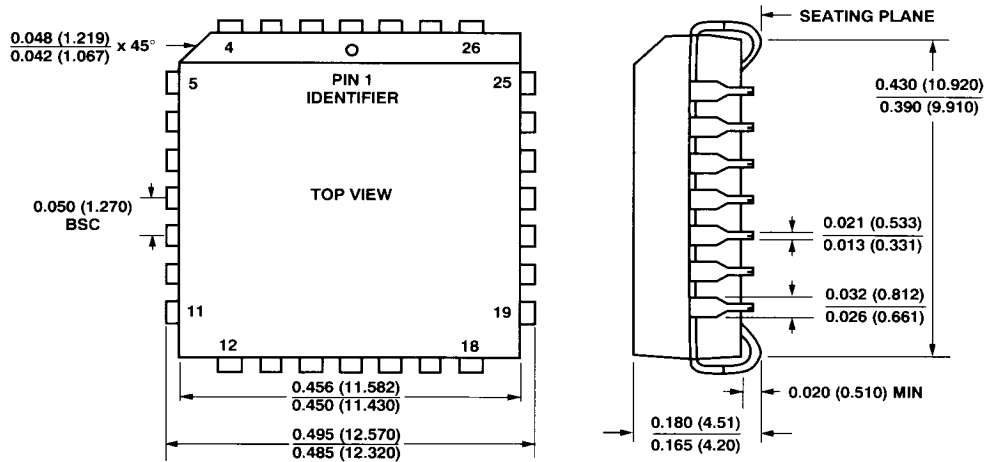

28-Lead Ceramic DIP (T Suffix)

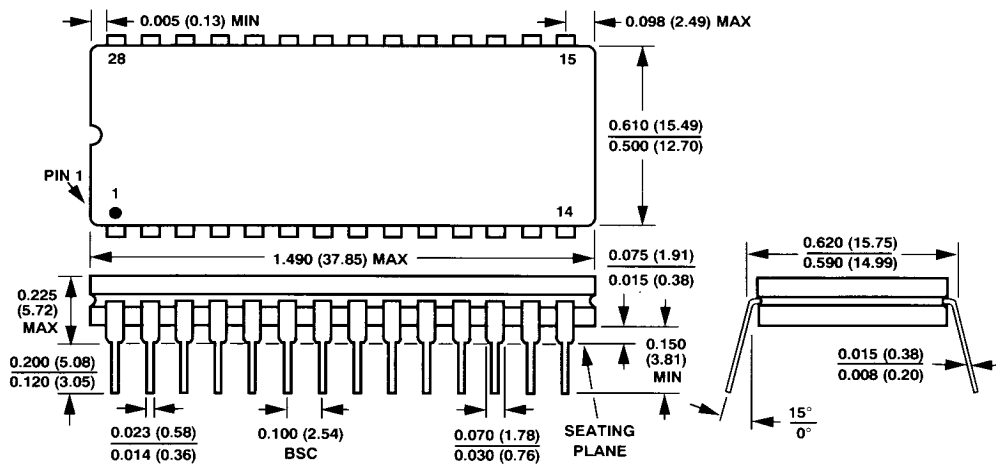

28-Lead Epoxy DIP (P Suffix)

