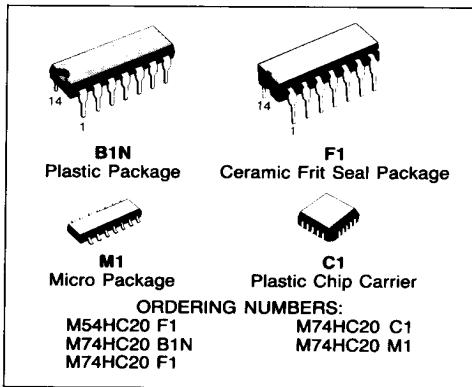


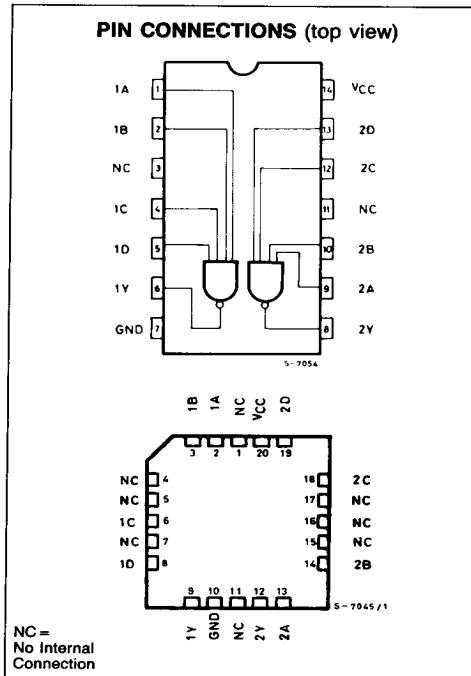
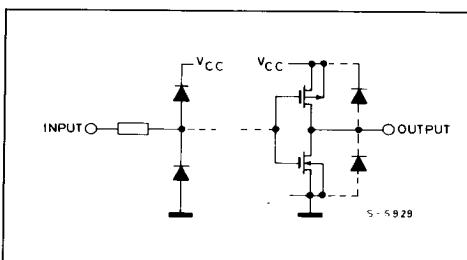
DUAL 4-INPUT NAND GATE

- HIGH SPEED
 $t_{PD} = 10 \text{ ns (TYP.)}$ at $V_{CC} = 5 \text{ V}$
- LOW POWER DISSIPATION
 $I_{CC} = 1 \mu\text{A}$ (MAX.) at $T_A = 25^\circ\text{C}$
- HIGH NOISE IMMUNITY
 $V_{NIH} = V_{NIL} = 28\%$ V_{CC} (MIN.)
- OUTPUT DRIVE CAPABILITY
 10 LSTTL LOADS
- SYMMETRICAL OUTPUT IMPEDANCE
 $|I_{OH}| = I_{OL} = 4 \text{ mA}$ (MIN.)
- BALANCED PROPAGATION DELAYS
 $t_{PLH} = t_{PHL}$
- WIDE OPERATING VOLTAGE RANGE
 V_{CC} (OPR) = 2V to 6V
- PIN AND FUNCTION COMPATIBLE
 WITH 54/74LS20

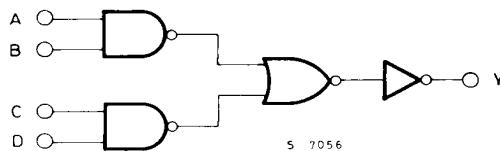

DESCRIPTION

The M54/74HC20 is a high speed CMOS DUAL 4-INPUT NAND GATE fabricated in silicon gate C²MOS technology. It has the same high speed performance of LSTTL combined with true CMOS low power consumption.

The internal circuit is composed of 3 stages including buffered output, which gives high noise immunity and a stable output. All inputs are equipped with protection circuits against static discharge and transient excess voltage.

INPUT AND OUTPUT EQUIVALENT CIRCUIT


LOGIC DIAGRAM (per Gate)



ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|-----------------------|--|-------------------------|------|
| V_{CC} | Supply Voltage | - 0.5 to 7 | V |
| V_I | DC Input Voltage | - 0.5 to $V_{CC} + 0.5$ | V |
| V_O | DC Output Voltage | - 0.5 to $V_{CC} + 0.5$ | V |
| I_{IK} | DC Input Diode Current | ± 20 | mA |
| I_{OK} | DC Output Diode Current | ± 20 | mA |
| I_O | DC Output Source Sink Current Per Output Pin | ± 25 | mA |
| I_{CC} or I_{GND} | DC V_{CC} or Ground Current | ± 50 | mA |
| P_D | Power Dissipation | 500 (*) | mW |
| T_{stg} | Storage Temperature | - 65 to 150 | °C |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

(*) 500 mW: $\leq 65^\circ\text{C}$ derate to 300 mW by 10 mW/°C: 65°C to 85°C

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Value | Unit |
|------------|--|---|------|
| V_{CC} | Supply Voltage | 2 to 6 | V |
| V_I | Input Voltage | 0 to V_{CC} | V |
| V_O | Output Voltage | 0 to V_{CC} | V |
| T_A | Operating Temperature 74HC Series 54HC Series | - 40 to 85 - 55 to 125 | °C |
| t_r, t_f | Input Rise and Fall Time | V_{CC} { 2 V 0 to 1000 4.5V 0 to 500 6 V 0 to 400 | ns |

DC SPECIFICATIONS

| Symbol | Parameter | V _{CC} | Test Condition | T _A =25°C 54HC and 74HC | | | -40 to 85°C 74HC | | -55 to 125°C 54HC | | Unit | |
|-----------------|---------------------------|-------------------|--|---------------------------------------|-------------------|--------------------|---------------------|--------------------|----------------------|--------------------|--------------|----|
| | | | | Min. | Typ. | Max. | Min. | Max. | Min. | Max. | | |
| V _{IH} | High Level Input Voltage | 2.0 4.5 6.0 | | 1.5 3.15 4.2 | — — — | — — — | 1.5 3.15 4.2 | — — — | 1.5 3.15 4.2 | — — — | V | |
| V _{IL} | Low Level Input Voltage | 2.0 4.5 6.0 | | — — — | — — — | 0.5 1.35 1.8 | — — — | 0.5 1.35 1.8 | — — — | 0.5 1.35 1.8 | V | |
| V _{OH} | High Level Output Voltage | 2.0 4.5 6.0 | V _I | I _O | 1.9 4.4 5.9 | 2.0 4.5 6.0 | — — — | 1.9 4.4 5.9 | — — — | 1.9 4.4 5.9 | — — — | |
| | | 4.5 6.0 | V _{IH} or V _{IL} | -20 μA -4.0 mA -5.2 mA | 4.18 5.68 | 4.31 5.8 | — — | 4.13 5.63 | — — | 4.10 5.60 | — — | |
| V _{OL} | Low Level Output Voltage | 2.0 4.5 6.0 | V _{IH} or V _{IL} | 20 μA | — — — | 0 0.1 0.1 | — — — | 0.1 0.1 0.1 | — — — | 0.1 0.1 0.1 | V | |
| | | 4.5 6.0 | | 4.0 mA 5.2 mA | — — | 0.17 0.18 | 0.26 0.26 | — — | 0.33 0.33 | — — | 0.40 0.40 | |
| I _I | Input Leakage Current | 6.0 | V _I =V _{CC} or GND | | — — — | — — — | ±0.1 | — — — | ±1 | — — — | ±1 | μA |
| I _{CC} | Quiescent Supply Current | 6.0 | V _I =V _{CC} or GND | | — — | — — | 1 | — — | 10 | — — | 20 | μA |

AC ELECTRICAL CHARACTERISTICS (V_{CC}=5V, T_A=25°C, C_L=15pF, Input t_r=t_f=6ns)

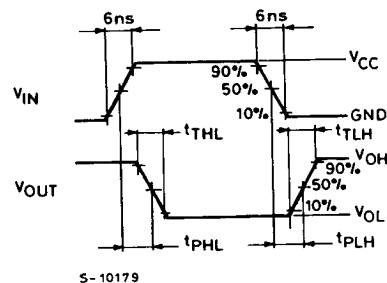
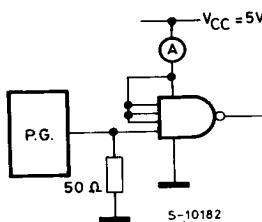
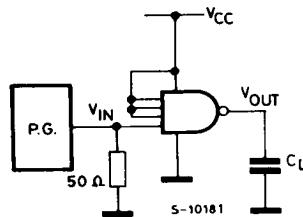
| Symbol | Parameter | 54HC and 74HC | | | Unit |
|--------------------------------------|------------------------|---------------|------|------|------|
| | | Min. | Typ. | Max. | |
| t _{TLH} t _{THL} | Output Transition Time | | 4 | 8 | ns |
| t _{PLH} t _{PHL} | Propagation Delay Time | | 11 | 18 | ns |

AC ELECTRICAL CHARACTERISTICS (C_L=50pF, Input t_r=t_f=6ns)

| Symbol | Parameter | V _{CC} | Test Condition | T _A =25°C 54HC and 74HC | | | -40 to 85°C 74HC | | -55 to 125°C 54HC | | Unit |
|--------------------------------------|-------------------------------|-------------------|----------------|---------------------------------------|---------------|----------------|---------------------|-----------------|----------------------|-----------------|------|
| | | | | Min. | Typ. | Max. | Min. | Max. | Min. | Max. | |
| t _{TLH} t _{THL} | Output Transition Time | 2.0 4.5 6.0 | | — — — | 30 8 7 | 75 15 13 | — — — | 95 19 16 | — — — | 110 22 19 | ns |
| t _{PLH} t _{PHL} | Propagation Delay Time | 2.0 4.5 6.0 | | — — — | 44 11 9 | 90 18 15 | — — — | 115 23 20 | — — — | 135 27 23 | ns |
| C _{IN} | Input Capacitance | | | — | 5 | 10 | — | 10 | — | 10 | pF |
| C _{PD (*)} | Power Dissipation Capacitance | | | — | 28 | — | — | — | — | — | pF |

Note (*) C_{PD} is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit)

SWITCHING CHARACTERISTICS TEST CIRCUIT

TEST CIRCUIT I_{CC} (Opr.)

INPUT WAVEFORM IS THE SAME AS THAT IN CASE OF SWITCHING CHARACTERISTICS TEST.