



**OCTAL D-TYPE FLIP-FLOP WITH 3-STATE OUTPUT
HCT564 INVERTING - HCT574 NON-INVERTING**


- HIGH SPEED
 $f_{MAX} = 45$ MHz (TYP) at $V_{CC} = 5V$
- LOW POWER DISSIPATION
 $I_{CC} = 4 \mu A$ (MAX.) at $T_A = 25^\circ C$
- HIGH NOISE IMMUNITY
 $V_{NIH} = V_{NIL} = 28\%$ V_{CC} (MIN.)
- OUTPUT DRIVE CAPABILITY
15 LSTTL LOADS
- SYMMETRICAL OUTPUT IMPEDANCE
 $|I_{OH}| = |I_{OL}| = 6$ mA (MIN.)
- BALANCED PROPAGATION DELAYS
 $t_{PLH} = t_{PHL}$
- PIN AND FUNCTION COMPATIBLE
WITH 54/74LS564/574

DESCRIPTION



The M54/74HCT564 and M54/74HCT574 are high speed CMOS OCTAL FLIP-FLOPS with 3-STATE OUTPUTS fabricated with silicon gate C²MOS technology. These ICs achieve the high speed operation similar to equivalent LSTTL while maintaining the CMOS low power dissipation.

These 8-bit D-type flip-flops are controlled by a clock input (CK) and an output enable input (\bar{OE}). On the positive transition of clock, the Q outputs will be set inversely to the logic state that were set-up at the D inputs. While the \bar{OE} input is at low level, the eight outputs will be in a normal logic state (high or low logic level), and while high the outputs will be in a high impedance state. The output control does not affect the internal operation of flip-flops. That is, the old data can be retained or the new data can be entered even while the outputs are off. The application engineer has a choice of combination of inverting and non-inverting outputs, symmetrical and neighbouring input/output pin layout. The 3-state output configuration and the wide choice of outline makes bus-organized systems simple. All inputs are equipped with protection circuit against static discharge and transient excess voltage. These integrated circuits are totally compatible, input and output characteristics, with standard 54/74 LSTTL logic families.


M54HCT/74HCT devices are designed to directly interface HSC²MOS system with TTL and NMOS components. These components are also plug in replacements for LSTTL devices but with low power consumption.

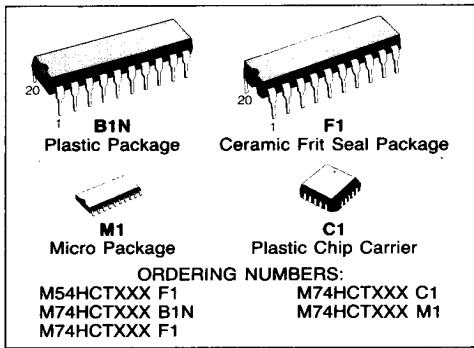


PIN CONNECTION (top view)

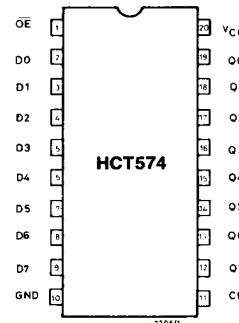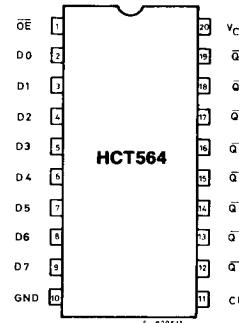

CHIP CARRIER

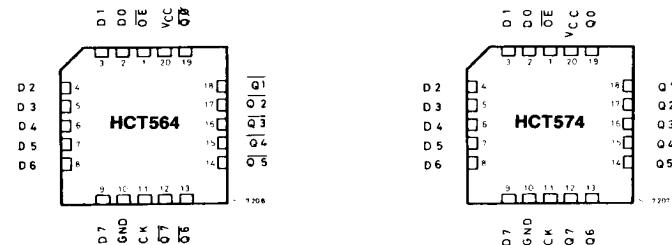

LOGIC DIAGRAM

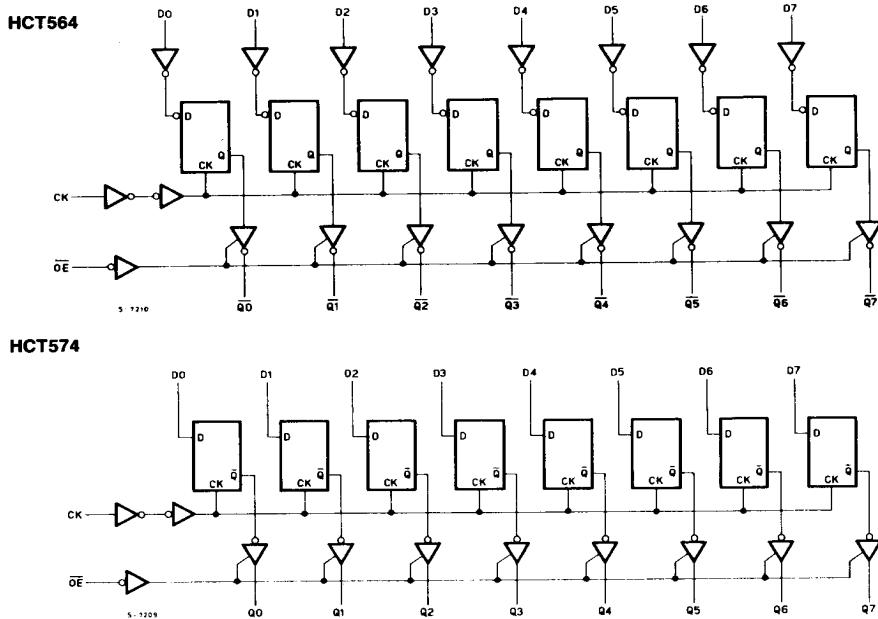

TRUTH TABLE

INPUTS			OUTPUTS	
OE	CK	D	Q (HCT 574)	\bar{Q} (HCT 564)
H	X	X	Z	Z
L	↓	X	NO CHANGE	NO CHANGE
L	↗	L	L	H
L	↗	H	H	L

X: DON'T CARE Z: HIGH IMPEDANCE

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	-0.5 to 7	V
V_I	DC Input Voltage	-0.5 to $V_{CC} + 0.5$	V
V_O	DC Output Voltage	-0.5 to $V_{CC} + 0.5$	V
I_{IK}	DC Input Diode Current	± 20	mA
I_{OK}	DC Output Diode Current	± 20	mA
I_O	DC Output Source Sink Current Per Output Pin	± 35	mA
I_{CC} or I_{GND}	DC V_{CC} or Ground Current	± 70	mA
P_D	Power Dissipation	500 (*)	mW
T_{stg}	Storage Temperature	-65 to 150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

(*) 500 mW: $\equiv 65^\circ\text{C}$ derate to 300 mW by 10 mW/°C to 85°C .


RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	4.5 to 5.5	V
V_I	Input Voltage	0 to V_{CC}	V
V_O	Output Voltage	0 to V_{CC}	V
T_A	Operating Temperature 74HC Series 54HC Series	-40 to 85 -55 to 125	°C
t_r, t_f	Input Rise and Fall Time	0 to 500	ns

DC SPECIFICATIONS

Symbol	Parameter	V _{CC}	Test Condition	T _A = 25°C 54HC and 74HC			-40 to 85°C 74HC		-55 to 125°C 54HC		Unit
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
V _{IH}	High Level Input Voltage	4.5 to 6.0		2.0 5.5	—	—	2.0	—	2	—	V
V _{IL}	Low Level Input Voltage	4.5 to 5.5		—	—	0.8	—	0.8	—	0.8	V
V _{OH}	High Level Output Voltage	4.5	V _I	I _O							V
			V _{IH} or V _{IL}	-20 μA	4.4	—	4.4	—	4.4	—	
			V _{IL}	-6.0 mA	4.18	4.31	—	4.13	—	4.1	
V _{OL}	Low Level Output Voltage	4.5	V _{IH} or V _{IL}	20 μA	—	0.1	—	0.1	—	0.1	V
			V _{IL}	6.0 mA	—	0.17	0.32	—	0.37	—	
I _I	Input Leakage Current	6.0	V _I = V _{CC} or GND	—	—	±0.1	—	±1.0	—	±1.0	μA
I _{OZ}	3 State Output Current	5.5		—	—	±0.5	—	±5.0	—	±10	μA
I _{CC}	Quiescent Supply Current	6.0	V _I = V _{CC} or GND	—	—	4	—	40	—	80	μA


INPUT AND OUTPUT EQUIVALENT CIRCUIT

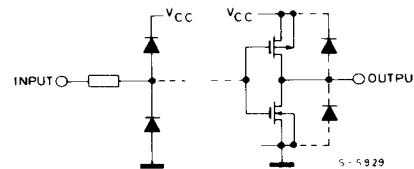



AC ELECTRICAL CHARACTERISTICS ($C_L = 50\text{pF}$, Input $t_r = t_f = 6\text{ns}$)

Symbol	Parameter	V_{CC}	Test Condition	$T_A = 25^\circ\text{C}$ 54HC and 74HC			$-40 \text{ to } 85^\circ\text{C}$ 74HC		$-55 \text{ to } 125^\circ\text{C}$ 54HC		Unit
				Min.	Typ.	Max.	Min.	Max.	Min.	Max.	
t_{TLH} t_{THL}	Output Transition Time	4.5		—	7	12	—	15	—	18	ns
t_{PLH} t_{PHL}	Propagation Delay Time (CK-Q)	4.5		—	26	41	—	51	—	62	ns
f_{MAX}	Maximum Clock Frequency	4.5		25	38	—	20	—	17	—	MHz
$t_{W(H)}$ $t_{W(L)}$	Minimum Pulse Width (CK)	4.5		—	8	15	—	19	—	22	ns
t_s	Minimum Set-up Time	4.5		—	1	10	—	13	—	15	ns
t_h	Minimum Hold Time	4.5		—	—	5	—	5	—	5	ns
t_{PZL} t_{PZH}	3-State Output Enable Time	4.5	$R_L = 1\text{K}\Omega$	—	18	35	—	44	—	53	ns
t_{PLZ} t_{PHZ}	3-State Output Disable Time	4.5	$R_L = 1\text{K}\Omega$	—	26	37	—	46	—	56	ns
C_{IN}	Input Capacitance			—	5	10	—	10	—	10	pF
C_{OUT}	Output Capacitance			—	10	—	—	—	—	—	
$C_{PD} (*)$	Power Dissipation Capacitance		HCT564 HCT574	—	60	—	—	—	—	—	—
Note (*) C_{PD} is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the following equation. $I_{CC(\text{Opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$.											

$$I_{CC(\text{Opr})} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$


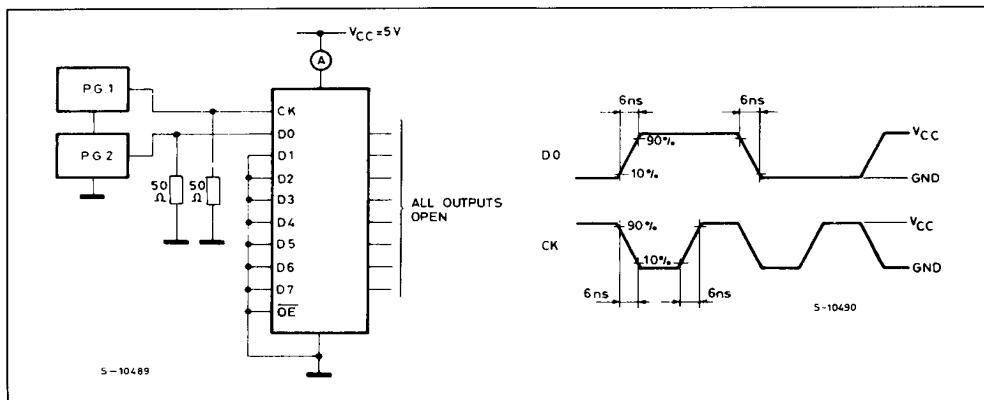
TEST CIRCUIT I_{CC} (Opr.)

SWITCHING CHARACTERISTICS TEST WAVEFORM

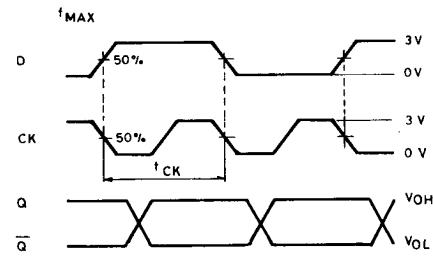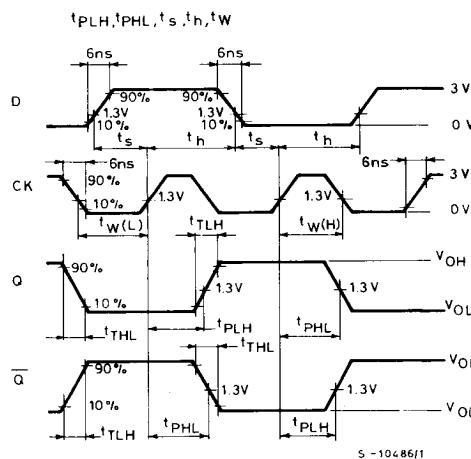

CLOCK DUTY: 50%

$$f_{MAX} = \frac{1}{T_{CK}}$$

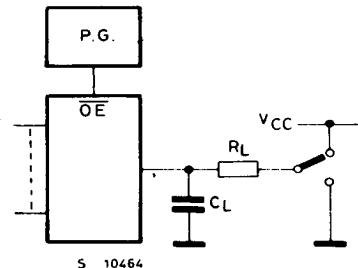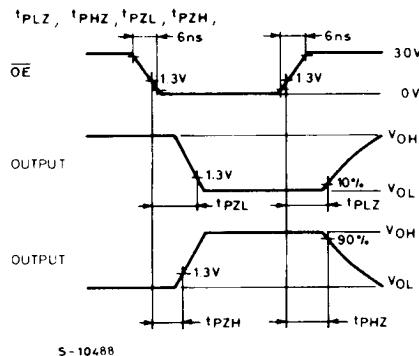

EACH FLIP-FLOP SHALL BE SET HIGH WHEN SWITCH IS CONNECTED TO GND LINE AND IT SHALL BE SET LOW WHEN SWITCH IS CONNECTED TO V_{CC} LINE.