



MOTOROLA

SEMICONDUCTORS

P.O. BOX 20912 • PHOENIX, ARIZONA 85036

MUR105	MUR130
MUR110	MUR140
MUR115	MUR150
MUR120	MUR160




SWITCHMODE POWER RECTIFIERS

... designed for use in switching power supplies, inverters and as free wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 25 and 50 Nanosecond Recovery Times
- 175°C Operating Junction Temperature
- Low Forward Voltage
- Low Leakage Current
- High Temperature Glass Passivated Junction

ULTRAFAST RECTIFIERS

1.0 AMPERE
50-600 VOLTS

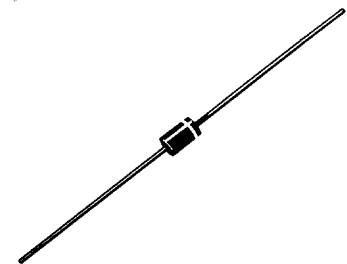

CASE 59-04
PLASTIC PACKAGE

MAXIMUM RATINGS

Rating	Symbol	MUR					Unit			
		105	110	115	120	130		140	150	160
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	50	100	150	200	300	400	500	600	Volts
Average Rectified Forward Current (Square Wave) (Mounting Method #3 Per Note 1)	$I_{F(AV)}$	1.0 @ $T_A = 130^\circ\text{C}$			1.0 @ $T_A = 120^\circ\text{C}$				Amps	
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	35								Amps
Operating Junction Temperature and Storage Temperature	T_J, T_{stg}	-65 to +175								°C

THERMAL CHARACTERISTICS

Maximum Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	See Note 1	°C/W
---	-----------------	------------	------

ELECTRICAL CHARACTERISTICS

Maximum Instantaneous Forward Voltage (1) ($i_F = 1.0$ Amp, $T_J = 150^\circ\text{C}$) ($i_F = 1.0$ Amp, $T_J = 25^\circ\text{C}$)	V_F	0.710 0.875	1.05 1.25	Volts
Maximum Instantaneous Reverse Current (1) (Rated dc Voltage, $T_J = 150^\circ\text{C}$) (Rated dc Voltage, $T_J = 25^\circ\text{C}$)	i_R	50 2.0	150 5.0	μA
Maximum Reverse Recovery Time ($I_F = 1.0$ Amp, $di/dt = 50$ Amp/ μs) ($I_F = 0.5$ Amp, $i_R = 1.0$ Amp, $I_{REC} = 0.25$ Amp)	t_{rr}	35 25	75 50	ns
Forward Recovery Time ($I_F = 1.0$ A, $di/dt = 100$ A/ μs , Recovery to 1.0 V)	t_{fr}	25	50	ns

(1)Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$
Switchmode is a trademark of Motorola Inc.

MUR105, 110 AND 115

FIGURE 1 — TYPICAL FORWARD VOLTAGE

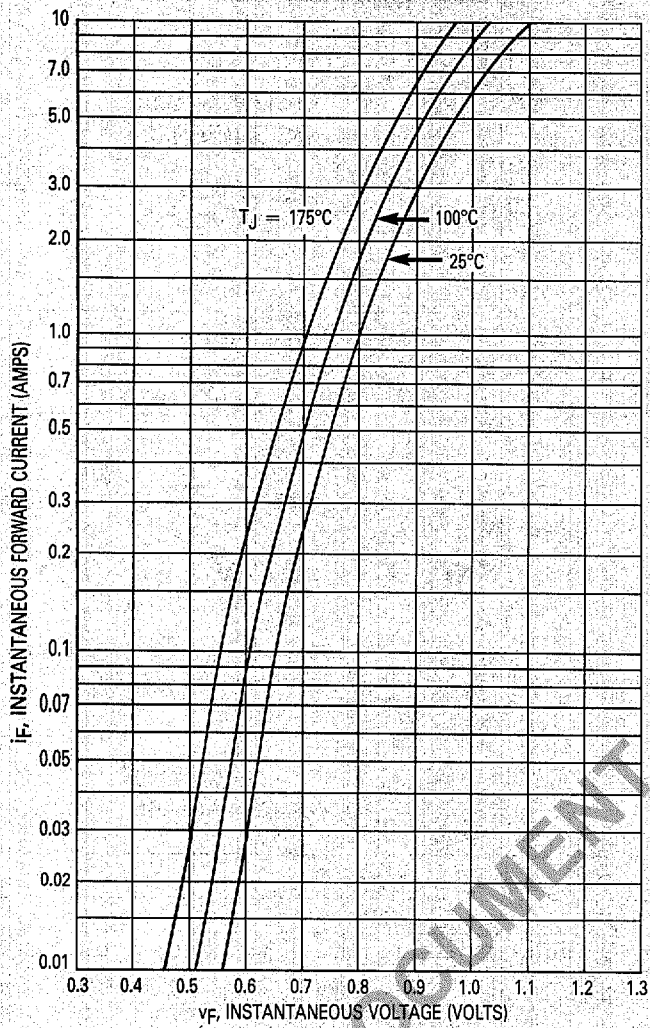


FIGURE 2 — TYPICAL REVERSE CURRENT*

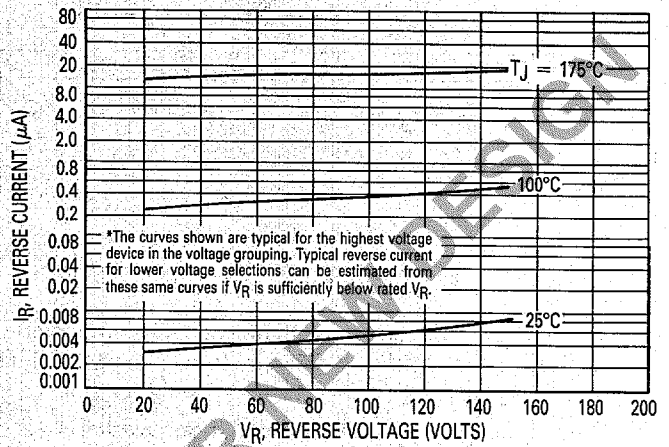


FIGURE 3 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 1)

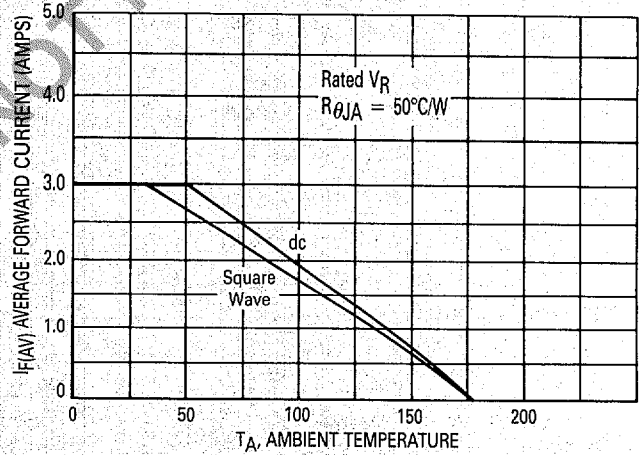


FIGURE 4 — POWER DISSIPATION


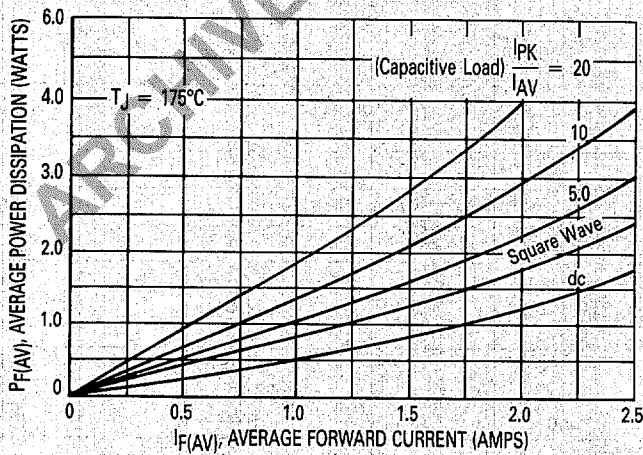


FIGURE 5 — TYPICAL CAPACITANCE

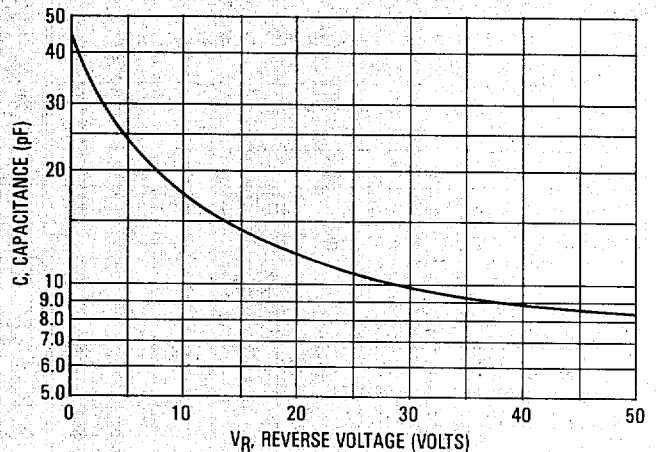

MUR120, 130, 140, 150, 160

FIGURE 6 — TYPICAL FORWARD VOLTAGE

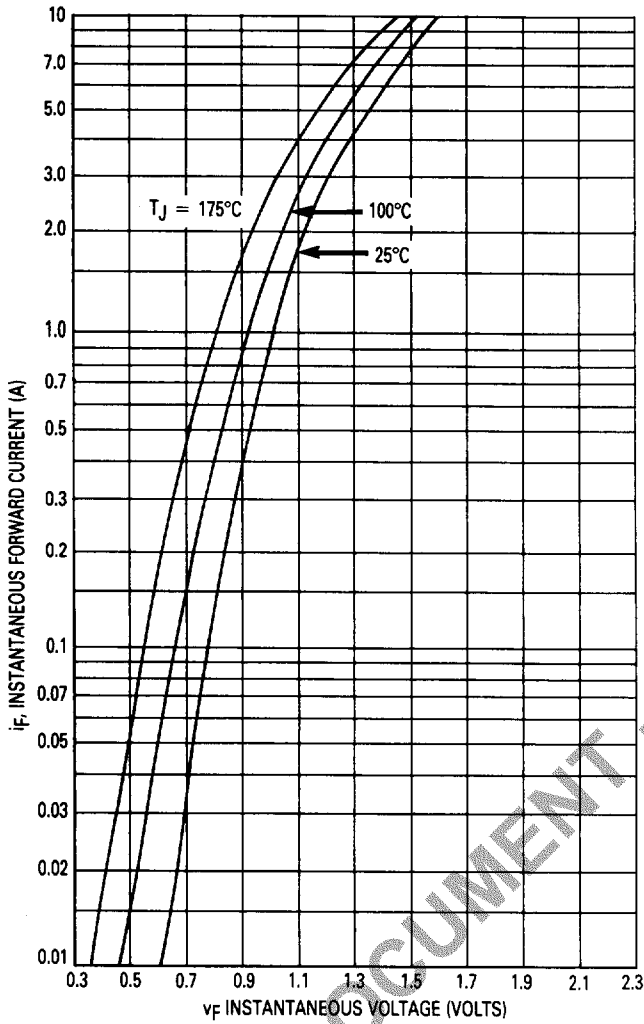


FIGURE 7 — TYPICAL REVERSE CURRENT*

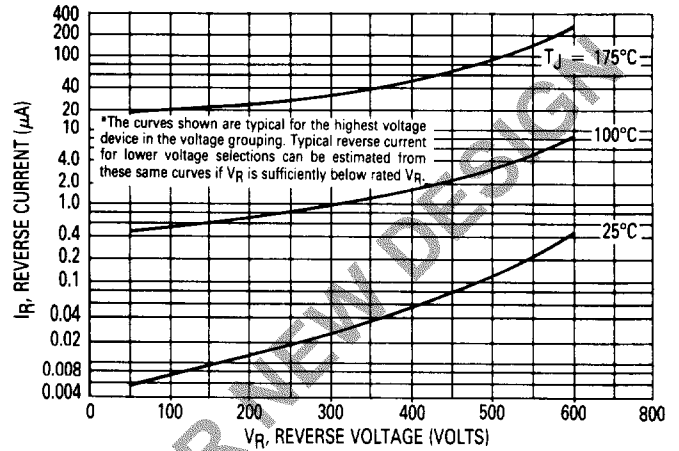


FIGURE 8 — CURRENT DERATING (MOUNTING METHOD #3 PER NOTE 1)

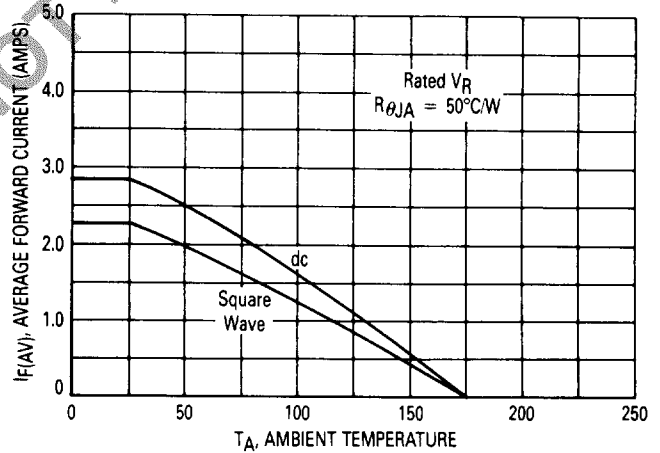


FIGURE 9 — POWER DISSIPATION


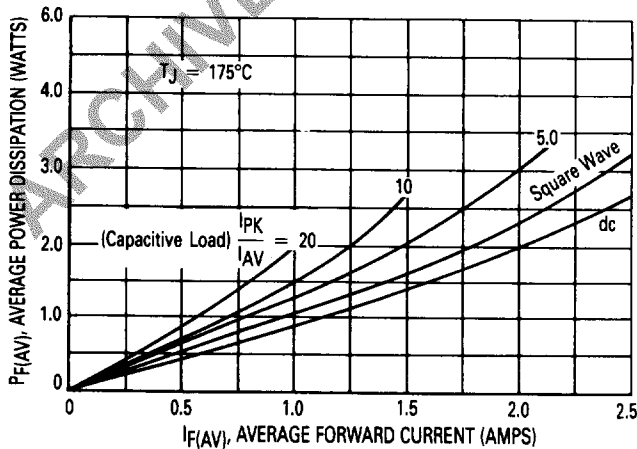


FIGURE 10 — TYPICAL CAPACITANCE

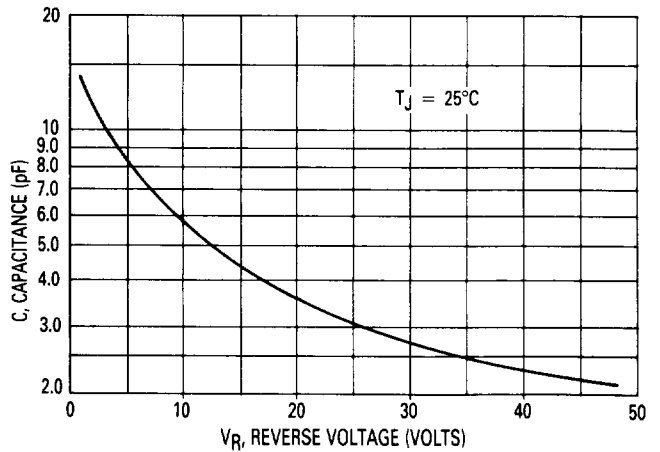


NOTE 1

Data shown for thermal resistance junction-to-ambient ($R_{\theta JA}$) for the mountings shown is to be used as typical guideline values for preliminary engineering or in case the tie point temperature cannot be measured.


TYPICAL VALUES FOR $R_{\theta JA}$ IN STILL AIR

MOUNTING METHOD	1/8	1/4	1/2	$R_{\theta JA}$
1	52	65	72	°C/W
2	67	80	87	°C/W
3	50			°C/W

MOUNTING METHOD 1




MOUNTING METHOD 2



Vector Pin Mounting

MOUNTING METHOD 3

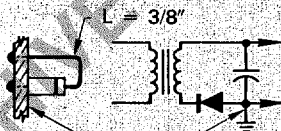


Board Ground Plane
P.C. Board with
1-1/2" x 1-1/2" Copper Surface

MECHANICAL CHARACTERISTICS

Case: Transfer Moulded Plastic
Finish: External Leads are Plated, Leads are readily Solderable
Polarity: Indicated by Cathode Band
Weight: 1.1 Grams (Approximately)
Maximum Lead Temperature for Soldering Purposes: 240°C, 1/8" from case for 10 seconds at 5.0 lbs. tension.

OUTLINE DIMENSIONS

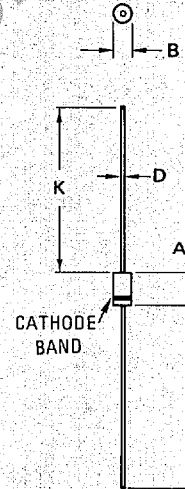

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.97	6.60	0.235	0.260
B	2.79	3.05	0.110	0.120
D	0.76	0.86	0.030	0.034
K	27.94	—	1.100	—

CASE 59-04

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Employment Opportunity/Affirmative Action Employer.



MOTOROLA Semiconductor Products Inc.

BOX 20912 • PHOENIX, ARIZONA 85036 • A SUBSIDIARY OF MOTOROLA INC.