



## GENERAL DESCRIPTION

The M670 is a VCISO (Voltage Controlled SAW Oscillator) frequency source for low-jitter clock generation. Its integrated SAW (surface acoustic wave) delay line provides low phase jitter. The M670 is available in a range of center frequencies. Minimum pull-range is  $\pm 50$  ppm (wider pull-range available).



The M670 is well suited for phase-locked loop implementations, clock and data recovery circuits, and other timing applications for the telecom and optical fiber networking markets (e.g., OC-48, OC-192).

## PIN ASSIGNMENT (5 x 7mm SMT)

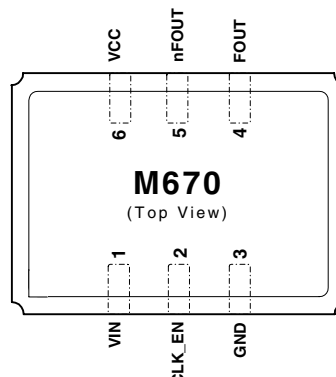


Figure 1: Pin Assignment

## FEATURES

- ◆ VCISO center frequencies from 155 to 700 MHz (Specify center frequency at time of order)
- ◆ Low phase jitter 0.19ps rms typical (50kHz-80MHz)
- ◆ Low phase noise -70dBc/Hz @ 1kHz offset
- ◆ Differential 3.3V LVPECL output
- ◆ Single 3.3V power supply
- ◆ Very small 5 x 7mm SMT (surface mount) package

## Sample of Available Output Frequencies

VCISO Center Frequency <sup>1</sup> (MHz)	Applications
622.0800	SONET/SDH
625.0000	Gigabit Ethernet
644.5313	Gigabit Ethernet FEC
669.3265	SONET/SDH FEC

Table 1: Sample of Available Output Frequencies

Note 1: Specify VCISO center frequency at time of order

## BLOCK DIAGRAM

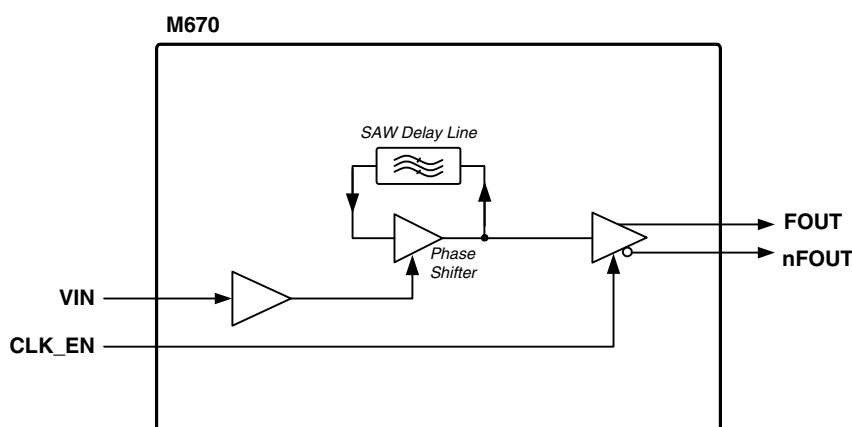


Figure 2: Block Diagram



## PIN DESCRIPTIONS

Number	Name	I/O	Configuration	Description
1	VIN	Input		Tuning control voltage.
2	CLK_EN	Input		Clock enable: Logic 1 enables normal operation. Logic 0 stops the output clock; nFOUT is held high, FOUT is held low.
3	GND	Ground		Power supply ground connections.
4	FOUT	Output	No internal terminator	Clock output pair. Differential LVPECL.
5	nFOUT			
6	VCC	Power		Power supply connection, connect to +3.3V.

Table 2: Pin Descriptions

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup>

Symbol	Parameter	Rating	Unit
$V_I$	Inputs	-0.5 to $V_{CC} + 0.5$	V
$V_O$	Outputs	-0.5 to $V_{CC} + 0.5$	V
$V_{CC}$	Power Supply Voltage	3.63	V
$T_S$	Storage Temperature	-55 to +125	°C

Table 3: Absolute Maximum Ratings

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in [Recommended Conditions of Operation](#), [DC Characteristics](#), or [AC Characteristics](#) is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

## RECOMMENDED CONDITIONS OF OPERATION

Symbol	Parameter	Min	Typ	Max	Unit
$V_{CC}$	Positive Supply Voltage	2.97	3.3	3.63	V
$T_A$	Ambient Operating Temperature	-40	25	+85	°C

Table 4: Recommended Conditions of Operation



## ELECTRICAL SPECIFICATIONS

### DC Characteristics

Unless stated otherwise,  $V_{CC} = 3.3 \text{ Volts} \pm 10\%$ ,  $T_A = 0 \text{ to } 85^\circ\text{C}$ , VCSO Frequency = 622-695MHz, Outputs terminated into  $180\Omega$  to ground

	Symbol	Parameter	Pin	Min	Typ	Max	Unit
Power Supply	$V_{CC}$	Positive Supply Voltage	VCC	2.97	3.3	3.63	V
	$I_{CC}$	Power Supply Current		80	100	mA	
Control Voltage	$V_{IN}$	Input Control Voltage Range		0		$V_{CC}$	V
		$V_{IN}$ Input Impedance	VIN		100		k $\Omega$
		$V_{IN}$ Modulation Bandwidth			500		kHz
Clock Enable Pull-up	$V_{IH}$	Input High Voltage		2		$V_{CC} + 0.3$	V
	$V_{IL}$	Input Low Voltage		-0.3		0.8	V
	$I_{IH}$	Input High Current	CLK_EN			5	$\mu\text{A}$
	$I_{IL}$	Input Low Current		-150			$\mu\text{A}$
	$R_{pullup}$	Internal Pull-up Resistor			51		k $\Omega$
Differential Outputs	$V_{OH}$	Output High Voltage		$V_{CC} - 0.98$		$V_{CC} - 0.75$	V
	$V_{OL}$	Output Low Voltage		$V_{CC} - 1.95$		$V_{CC} - 1.63$	V
	$V_{P-P}$	Peak to Peak Output Voltage	FOUT, nFOUT	0.4	0.6	0.85	$V_{P-P}$
	$I_{OUT}$	Output Current				20	mA

Table 5: DC Characteristics

### AC Characteristics

Unless stated otherwise,  $V_{CC} = 3.3 \text{ Volts} \pm 10\%$ ,  $T_A = 0 \text{ to } 85^\circ\text{C}$ , VCSO Frequency = 622-695MHz, Outputs terminated into  $180\Omega$  to ground

	Symbol	Parameter	Min	Typ	Max	Unit	Notes
Frequency	$F_{OUT}$	Output Center Frequency Range	155		700	MHz	
	APR	Absolute Pull-Range <sup>1</sup>	$\pm 50$			ppm	
	$f_{STAB}$	Frequency Stability		110		ppm p-p	
	$L_{IN}$	Tuning Linearity		6		%	
	$K_{VCO}$	VCO Gain	@622.08MHz		265		ppm/V $V_{IN} = 0.3 \text{ to } 3.0\text{V}$ Best fit straight line
Outputs		Non-harmonic Spurious	-50	-70		dBc	
	$\Phi_n$	SSB Phase Noise offset from carrier	100Hz Offset		-43		dBc/Hz
			1kHz Offset		-70		dBc/Hz
			10kHz Offset		-98		dBc/Hz
			100kHz Offset		-124		dBc/Hz
	J(t)	Jitter (rms)	12kHz to 20MHz		0.36		ps rms
			50kHz to 80MHz		0.19		ps rms
odc	Output Duty Cycle <sup>2</sup>	45		55		%	
$t_R$	Output Rise Time <sup>2</sup> for FOUT, nFOUT		300	400		ps	20% to 80%
$t_F$	Output Fall Time <sup>2</sup> for FOUT, nFOUT		300	400		ps	20% to 80%

Table 6: AC Characteristics

Note 1: Consult ICS for availability of other APRs.

Note 2: See [Parameter Measurement Information](#) on pg. 4.



## PARAMETER MEASUREMENT INFORMATION

### Output Rise and Fall Time

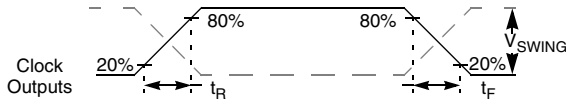


Figure 3: Output Rise and Fall Time

### Output Duty Cycle

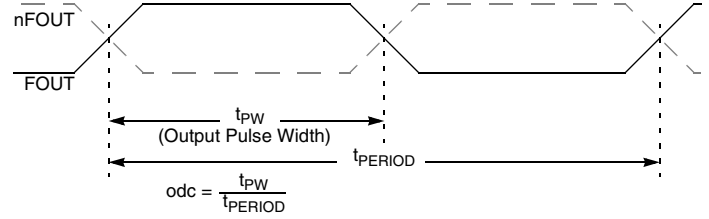


Figure 4: Output Duty Cycle

## TEST DATA

### Broadband Jitter

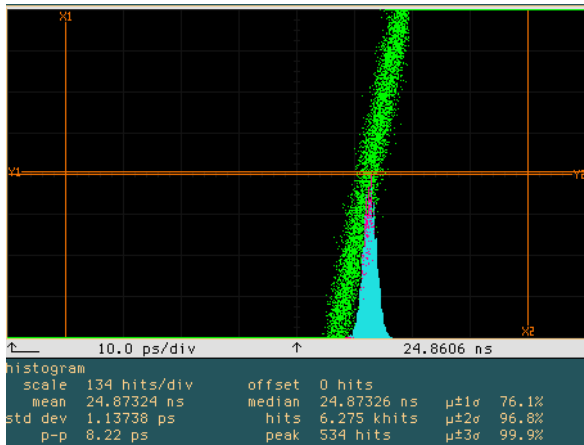


Figure 5: Broadband Jitter

### Output Waveform

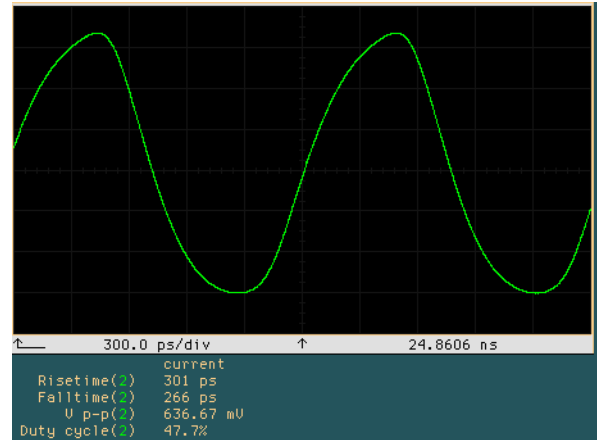


Figure 7: Output Waveform

### Linearity

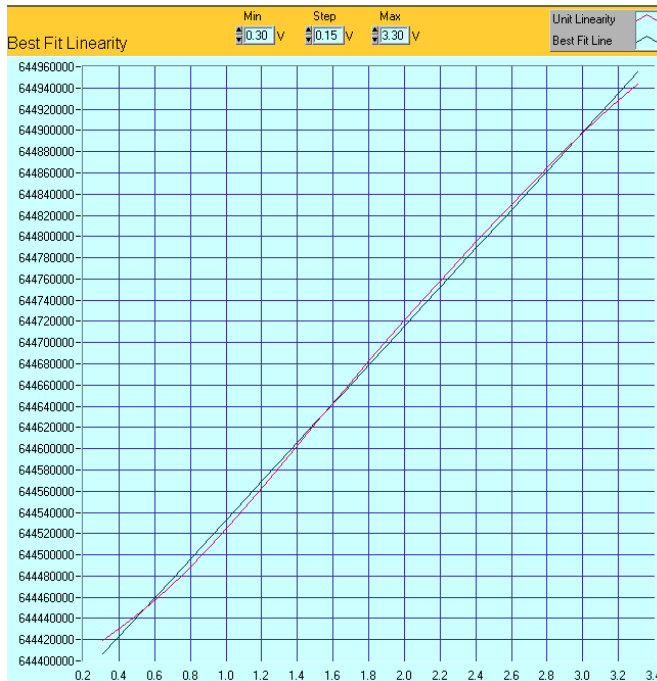


Figure 6: Linearity

### Phase Noise


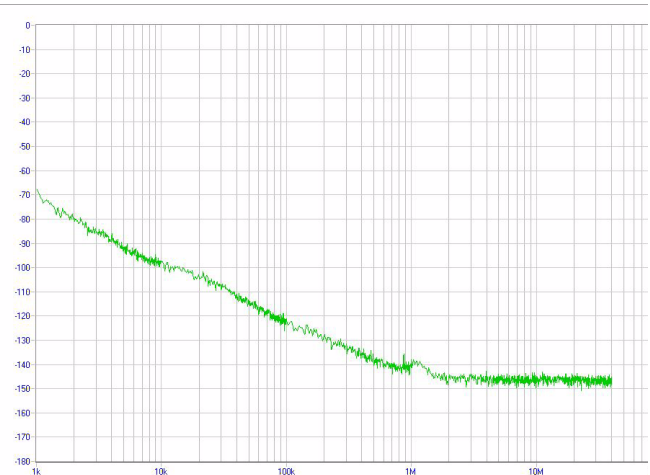


Figure 8: Phase Noise



**DEVICE PACKAGE - 5 x 7mm SMT (Surface Mount) Package**

**Mechanical Dimensions:**

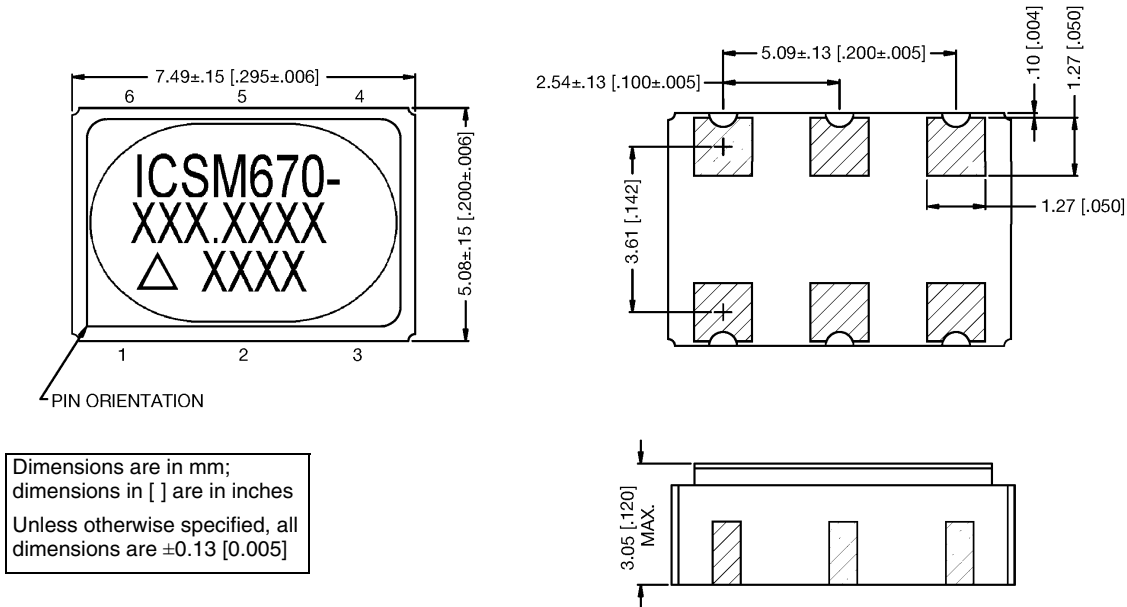

Dimensions are in mm;  
dimensions in [ ] are in inches  
Unless otherwise specified, all  
dimensions are ±0.13 [0.005]

Figure 9: Device Package - 5 x 7mm SMT (Surface Mount) Package

**ORDERING INFORMATION**

For Output Frequency (MHz)	Order Part Number
xxx.xxxx	M670-xxx.xxxx
e.g., 622.0800	M670-622.0800

Table 7: Ordering Information

**Standard Output Frequencies**

155.5200	622.0800
156.2500	625.0000
156.8324	627.3296
161.1328	644.5313
166.6286	666.5143
167.2820	669.1281
167.3280	669.3120
167.3316	669.3265
167.7097	670.8386
168.0400	672.1600
172.6423	690.5692
173.3708	693.4830

Table 8: Standard Output Frequencies

Consult ICS for the availability of other VCSO frequencies.

While the information presented herein has been checked for both accuracy and reliability, Integrated Circuit Systems (ICS) assumes no responsibility for either its use or for the infringement of any patents or other rights of third parties, which would result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by ICS. ICS reserves the right to change any circuitry or specifications without notice. ICS does not authorize or warrant any ICS product for use in life support devices or critical medical instruments.



Integrated  
Circuit  
Systems, Inc.

M670

VOLTAGE CONTROLLED SAW OSCILLATOR

*Product Data Sheet*

---