

# 3.3V-5V 4 Mb (512K x 8) TIMEKEEPER<sup>®</sup> SRAM


#### PRELIMINARY DATA

- INTEGRATED ULTRA LOW POWER SRAM, REAL TIME CLOCK, POWER-FAIL CONTROL CIRCUIT, BATTERY and CRYSTAL
- YEAR 2000 COMPLIANT-CENTURY REGISTER
- BCD CODED YEAR, MONTH, DAY, DATE, HOURS, MINUTES and SECONDS
- BATTERY LOW WARNING FLAG
- AUTOMATIC POWER-FAIL CHIP DESELECT and WRITE PROTECTION
- WRITE PROTECT VOLTAGES (VPFD = Power-fail Deselect Voltage):
  - M48T513Y:  $4.20V \le V_{PFD} \le 4.50V$
  - M48T513V:  $2.70V \le V_{PFD} \le 3.00V$
- CONVENTIONAL SRAM OPERATION; UNLIMITED WRITE CYCLES
- SOFTWARE CONTROLLED CLOCK CALIBRATION for HIGH ACCURACY APPLICATIONS
- 10 YEARS of DATA RETENTION and CLOCK OPERATION in the ABSENCE of POWER
- SELF-CONTAINED BATTERY and CRYSTAL in DIP PACKAGE
- MICROPROCESSOR POWER-ON RESET (Valid even during battery back-up mode)
- PROGRAMMABLE ALARM OUTPUT ACTIVE in the BATTERY BACK-UP MODE


#### **DESCRIPTION**

The M48T513Y/513V TIMEKEEPER® RAM is a non-volatile 4,194,304 bit static RAM and real time clock organized as 524,288 words by 8 bits. System integration features include Programmable Alarms, Battery Low status Flag and a Power-on Reset. The special 36-pin DIP package provides a highly integrated battery back-up memory and real time clock solution.

The memory locations providing user accessible BYTEWIDE™ clock information are in the bytes with addresses 7FF1h and 7FF9h-7FFFh. These clock locations contain the century, year, month, date, day, hour, minute and second in 24 hour BCD format. Corrections for 28, 29 (leap year, including year 2000), 30, and 31 day months are made automatically. Reference the M48T201 data sheet for complete register map.

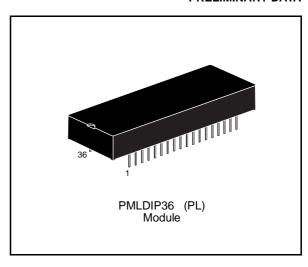


#### **Logic Diagram**

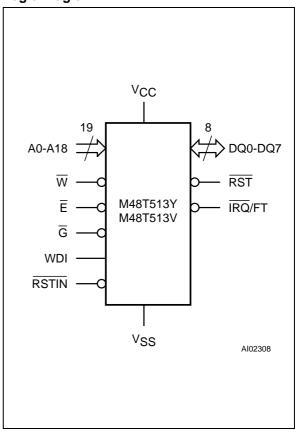


May 1998 1/4

### **DIP Pin Connections**

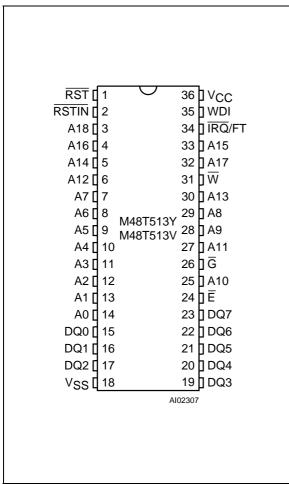

# **Ordering Information Scheme**

For a list of available options or for further information on any aspect of this device, please contact the STMicroelectronics Sales Office nearest to you.

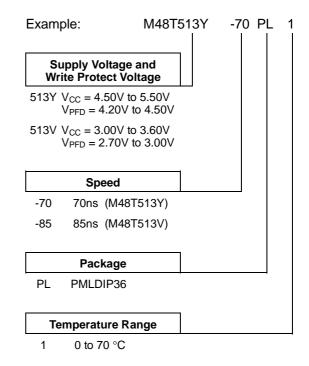


# **Signal Names**

A0-A18	Address Inputs	
DQ0-DQ7	Data Inputs / Outputs	
Ē	Chip Enable Input	
G	Output Enable Input	
$\overline{\mathbb{W}}$	Write Enable Input	
WDI	Watchdog input	
RST	Reset Output (open drain)	
RSTIN	Reset Input	
ĪRQ/FT	Interrupt / Frequency Test Output (open drain)	
V <sub>CC</sub>	Supply Voltage	
V <sub>SS</sub>	Ground	

2/4

# PMLDIP36 - 36 pin Plastic DIP Module

Symb	mm			inches		
	Тур	Min	Max	Тур	Min	Max
Α		9.27	9.52		0.365	0.375
A1		0.38	_		0.015	_
В		0.43	0.59		0.017	0.023
С		0.20	0.33		0.008	0.013
D		52.58	53.34		2.070	2.100
Е		18.03	18.80		0.710	0.740
e1		2.30	2.81		0.090	0.110
e3		38.86	47.50		1.530	1.870
eA		14.99	16.00		0.590	0.630
L		3.05	3.81		0.120	0.150
S		4.45	5.33		0.175	0.210
N		36			36	•

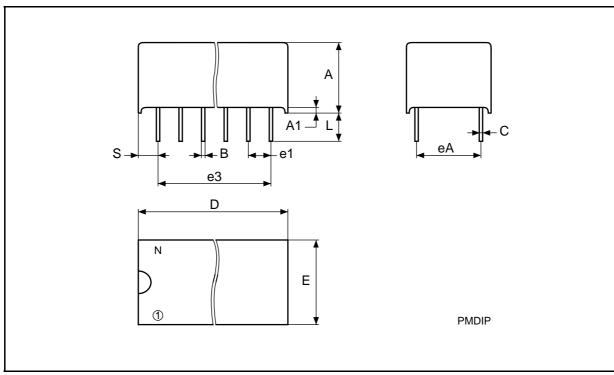

Drawing is not to scale.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© 1998 STMicroelectronics - All Rights Reserved

® TIMEKEEPER is a registered trademark of STMicroelectronics
™ BYTEWIDE is a trademark of STMicroelectronics

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

47/