

To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003


BCR5KM

MEDIUM POWER USE

INSULATED TYPE, PLANAR PASSIVATION TYPE

Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C


BCR5KM



- IT (RMS) 5A
- VDRM 600V
- IFGT I , IRGT I , IRGT III 15mA (10mA) *3
- UL Recognized: Yellow Card No.E80276(N)

File No. E80271

OUTLINE DRAWING Dimensions in mm

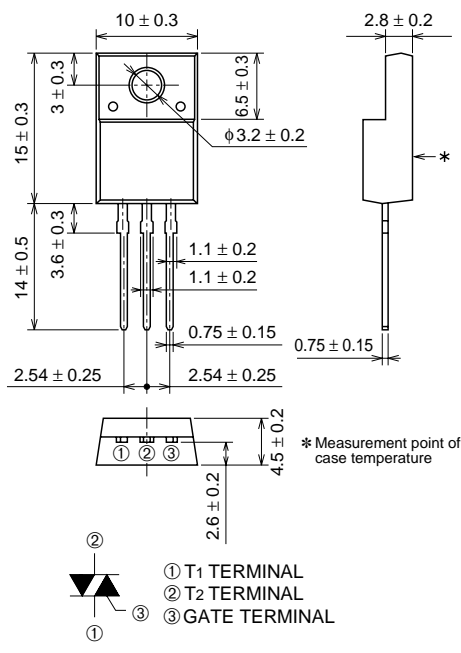

TO-220FN

* Measurement point of case temperature

APPLICATION

Control of heater such as electric rice cooker, electric pot

MAXIMUM RATINGS

Symbol	Parameter	Voltage class	
		12	Unit
VDRM	Repetitive peak off-state voltage*1	600	V
VDSM	Non-repetitive peak off-state voltage*1	720	V

Symbol	Parameter	Conditions	Ratings	Unit
IT (RMS)	RMS on-state current	Commercial frequency, sine full wave 360° conduction, Tc=103°C	5	A
ITSM	Surge on-state current	60Hz sinewave 1 full cycle, peak value, non-repetitive	50	A
I ² _t	I ² _t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	10.4	A ² s
PGM	Peak gate power dissipation		3	W
PG (AV)	Average gate power dissipation		0.3	W
VGM	Peak gate voltage		10	V
IGM	Peak gate current		2	A
T _j	Junction temperature		-40 ~ +125	°C
T _{stg}	Storage temperature		-40 ~ +125	°C
—	Weight		2.0	g
V _{iso}	Isolation voltage	Ta=25°C, AC 1 minute, T1 · T2 · G terminal to case	2000	V

*1. Gate open.

BCR5KM

Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE

ELECTRICAL CHARACTERISTICS



Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
IDRM	Repetitive peak off-state current	T _j =125°C, V _{DRM} applied	—	—	2.0	mA
VTM	On-state voltage	T _c =25°C, I _{TM} =7A, Instantaneous measurement	—	—	1.5	V
VFGT I	Gate trigger voltage *2	T _j =25°C, V _D =6V, R _L =6Ω, R _G =330Ω	I	—	1.5	V
VRGT I			II	—	1.5	V
VRGT III			III	—	1.5	V
IFGT I	Gate trigger current *2	T _j =25°C, V _D =6V, R _L =6Ω, R _G =330Ω	I	—	15*3	mA
IRGT I			II	—	15*3	mA
IRGT III			III	—	15*3	mA
VGD	Gate non-trigger voltage	T _j =125°C, V _D =1/2V _{DRM}	0.2	—	—	V
R _{th} (j-c)	Thermal resistance	Junction to case *4	—	—	3.8	°C/W
R _{th} (j-a)	Thermal resistance	Junction to ambient	—	—	50	°C/W

*2. Measurement using the gate trigger characteristics measurement circuit.

*3. High sensitivity (IGT ≤ 10mA) is also available. (IGT item ①)

*4. The contact thermal resistance R_{th} (c-f) in case of greasing is 0.5°C/W.

PERFORMANCE CURVES

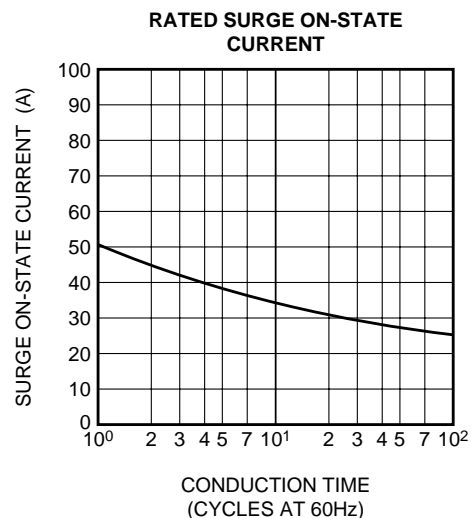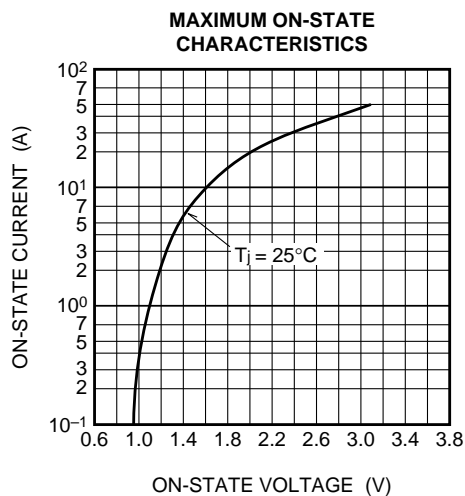


BCR5KM


Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE


GATE CHARACTERISTICS (I, II AND III)

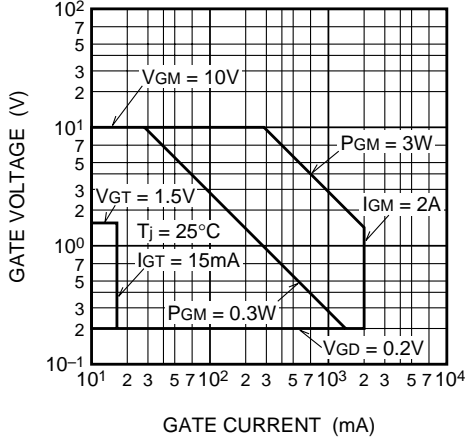


GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE

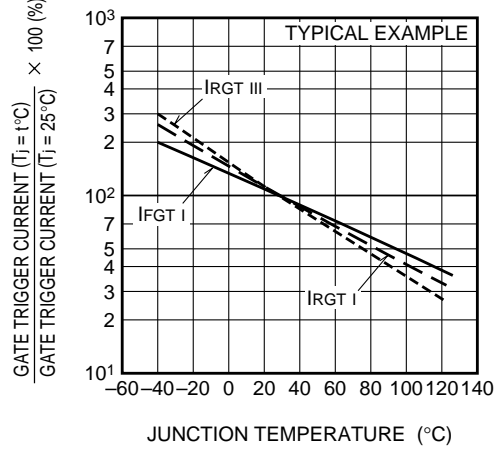


GATE TRIGGER VOLTAGE VS. JUNCTION TEMPERATURE

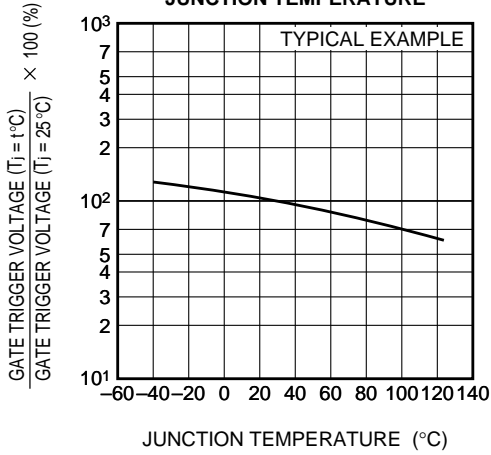


MAXIMUM TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO CASE)

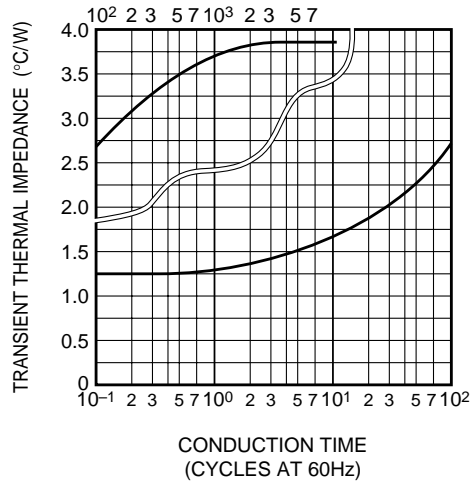

MAXIMUM TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO AMBIENT)

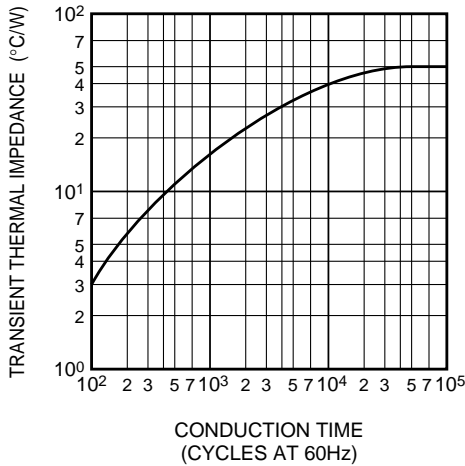







MAXIMUM ON-STATE POWER DISSIPATION

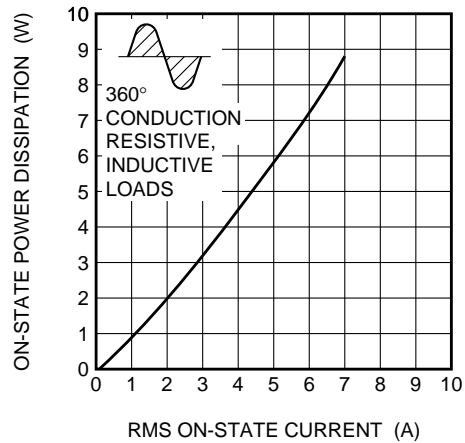

BCR5KM

Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE

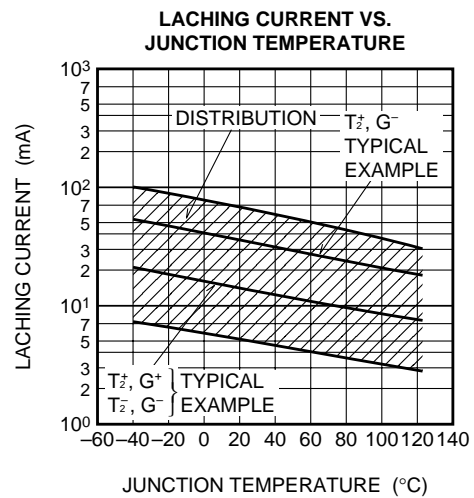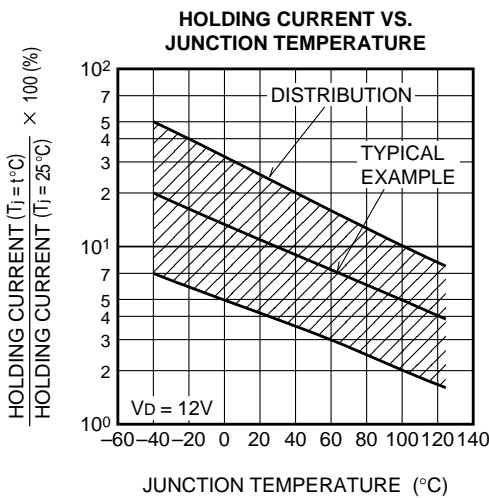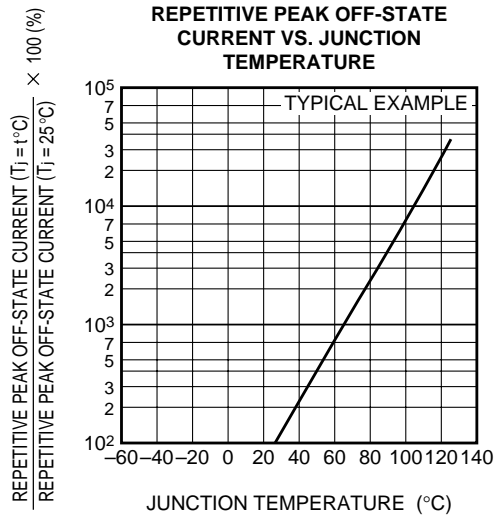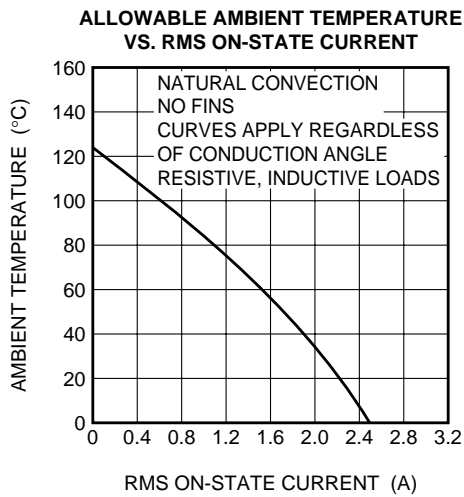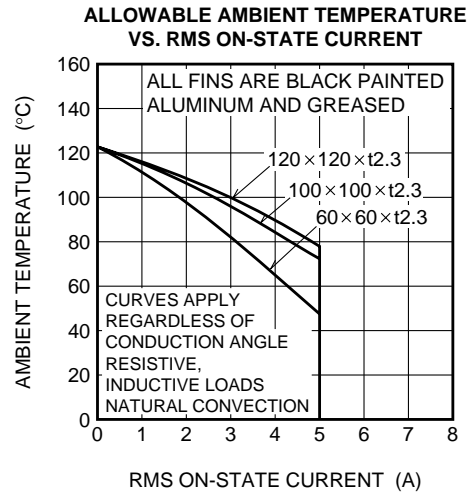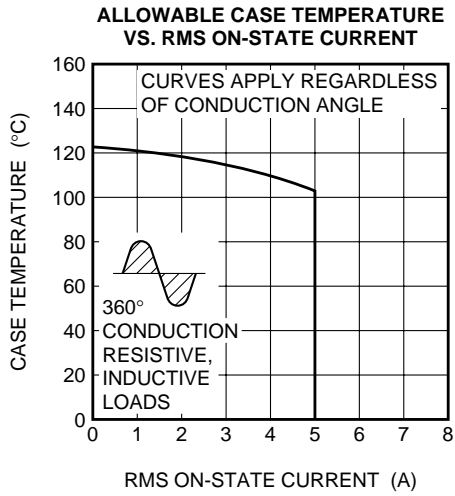


BCR5KM


Refer to the page 6 as to the product guaranteed maximum junction temperature 150°C

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE


BREAKOVER VOLTAGE VS. JUNCTION TEMPERATURE

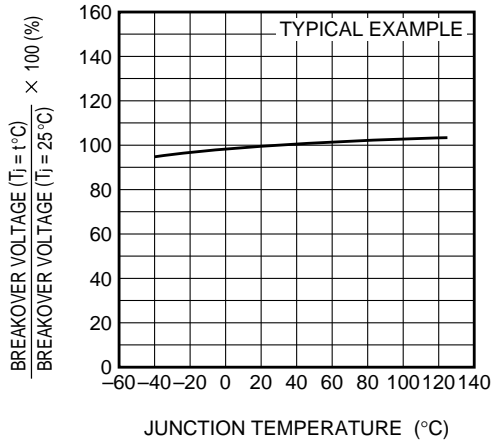


BREAKOVER VOLTAGE VS. RATE OF RISE OF OFF-STATE VOLTAGE

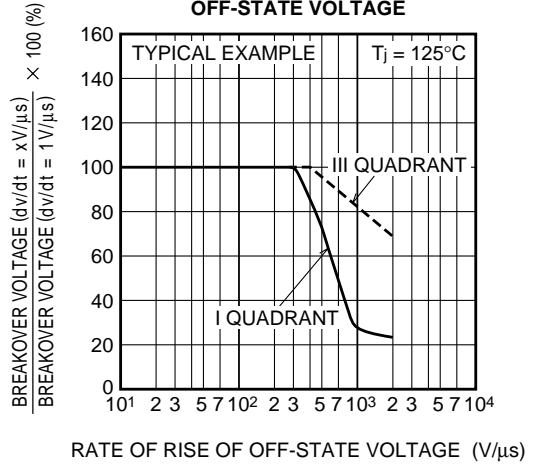

GATE TRIGGER CURRENT VS. GATE CURRENT PULSE WIDTH

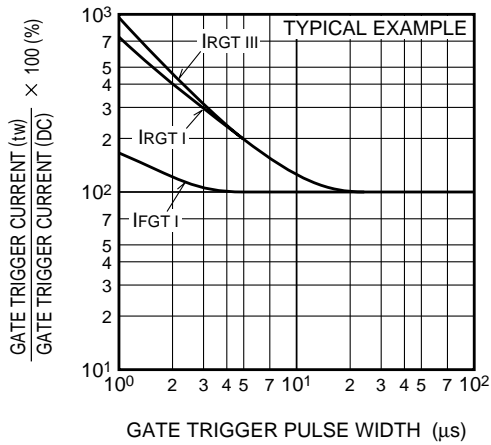

GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

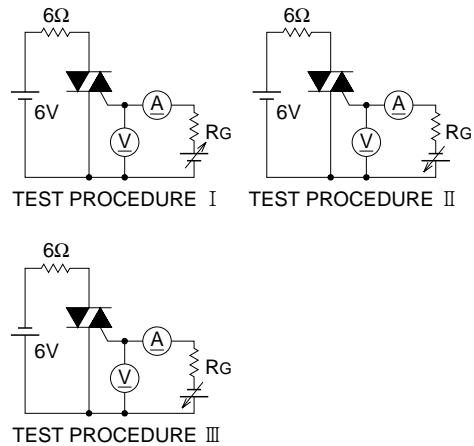


BCR5KM

MEDIUM POWER USE

INSULATED TYPE, PLANAR PASSIVATION TYPE


The product guaranteed maximum junction temperature 150°C (See warning.)

BCR5KM



- IT (RMS) 5A
- VDRM 600V
- IFGT I, IRGT I, IRGT III 15mA (10mA) *3
- UL Recognized: Yellow Card No.E80276(N)
File No. E80271

OUTLINE DRAWING Dimensions in mm

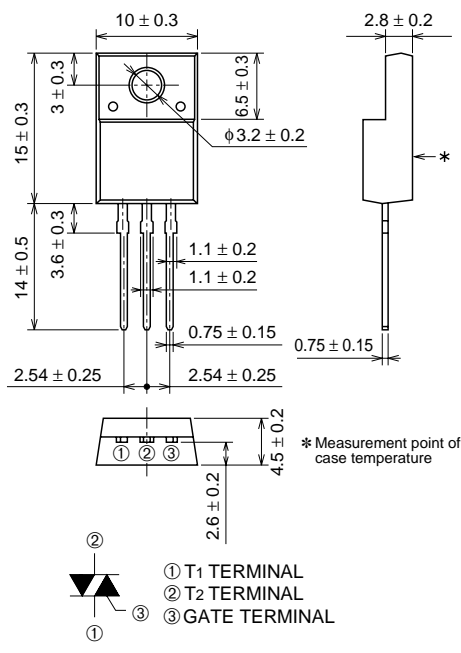

* Measurement point of case temperature

TO-220FN

① T1 TERMINAL
② T2 TERMINAL
③ GATE TERMINAL

APPLICATION

Control of heater such as electric rice cooker, electric pot

(Warning)

1. Refer to the recommended circuit values around the triac before using.
2. Be sure to exchange the specification before using. If not exchanged, general triacs will be supplied.

MAXIMUM RATINGS

Symbol	Parameter	Voltage class	
		12	Unit
VDRM	Repetitive peak off-state voltage*1	600	V
VDSM	Non-repetitive peak off-state voltage*1	720	V

Symbol	Parameter	Conditions	Ratings	Unit
IT (RMS)	RMS on-state current	Commercial frequency, sine full wave 360° conduction, Tc=128°C	5	A
ITSM	Surge on-state current	60Hz sinewave 1 full cycle, peak value, non-repetitive	50	A
I ² _t	I ² _t for fusing	Value corresponding to 1 cycle of half wave 60Hz, surge on-state current	10.4	A ² s
PGM	Peak gate power dissipation		3	W
PG (AV)	Average gate power dissipation		0.3	W
VGM	Peak gate voltage		10	V
IGM	Peak gate current		2	A
T _j	Junction temperature		-40 ~ +150	°C
T _{stg}	Storage temperature		-40 ~ +150	°C
—	Weight		2.0	g
V _{iso}	Isolation voltage	Ta=25°C, AC 1 minute, T1 · T2 · G terminal to case	2000	V

*1. Gate open.

BCR5KM

The product guaranteed maximum junction temperature 150°C (See warning.)

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE

ELECTRICAL CHARACTERISTICS



Symbol	Parameter	Test conditions	Limits			Unit	
			Min.	Typ.	Max.		
IDRM	Repetitive peak off-state current	T _j =150°C, V _{DRM} applied	—	—	2.0	mA	
V _{TM}	On-state voltage	T _c =25°C, I _{TM} =7A, Instantaneous measurement	—	—	1.5	V	
V _{FGT I}	Gate trigger voltage *2	T _j =25°C, V _D =6V, R _L =6Ω, R _G =330Ω	I	—	—	1.5	V
V _{RGT I}			II	—	—	1.5	V
V _{RGT III}			III	—	—	1.5	V
I _{FGT I}	Gate trigger current *2	T _j =25°C, V _D =6V, R _L =6Ω, R _G =330Ω	I	—	—	15*3	mA
I _{RGT I}			II	—	—	15*3	mA
I _{RGT III}			III	—	—	15*3	mA
V _{GD}	Gate non-trigger voltage	T _j =125°C/150°C, V _D =1/2V _{DRM}	0.2/0.1	—	—	V	
R _{th (j-c)}	Thermal resistance	Junction to case *4	—	—	3.8	°C/W	
R _{th (j-a)}	Thermal resistance	Junction to ambient	—	—	50	°C/W	

*2. Measurement using the gate trigger characteristics measurement circuit.

*3. High sensitivity (I_{GT} ≤ 10mA) is also available. (IGT item ①)

*4. The contact thermal resistance R_{th (c-f)} in case of greasing is 0.5°C/W.

PERFORMANCE CURVES

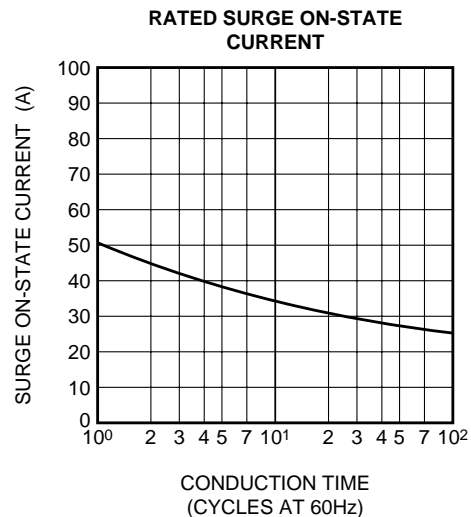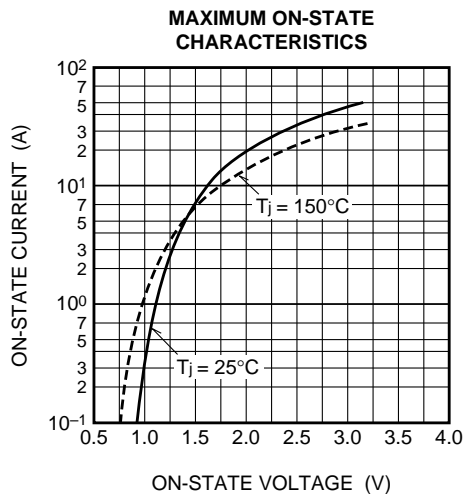


BCR5KM


The product guaranteed maximum junction temperature 150°C (See warning.)

**MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE**


**GATE CHARACTERISTICS
(I, II AND III)**

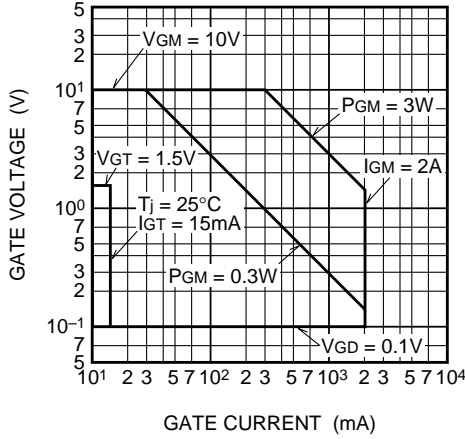


GATE TRIGGER CURRENT VS. JUNCTION TEMPERATURE

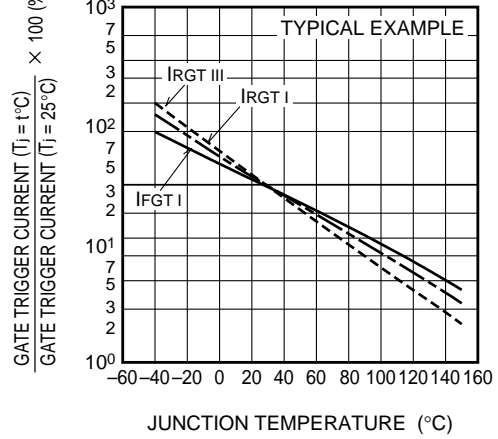


GATE TRIGGER VOLTAGE VS. JUNCTION TEMPERATURE

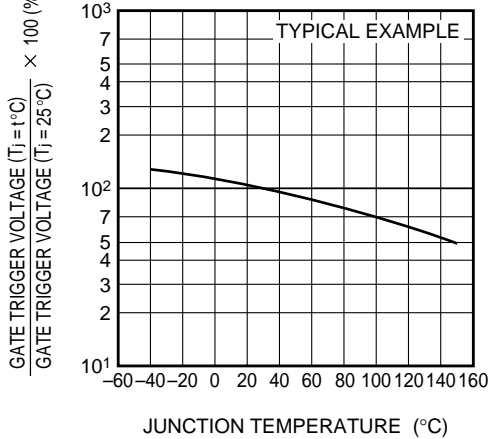


MAXIMUM TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO CASE)

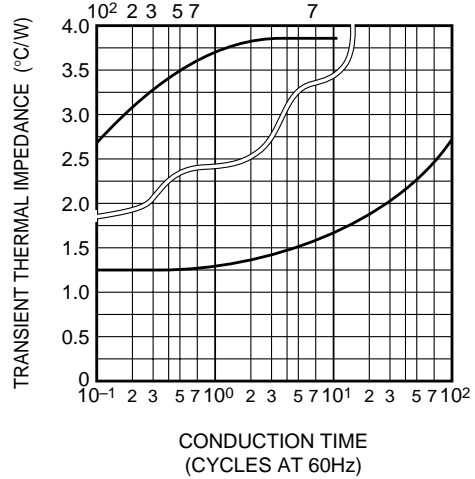

MAXIMUM TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (JUNCTION TO AMBIENT)

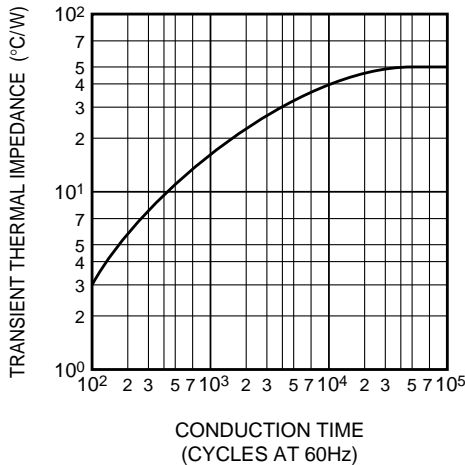

MAXIMUM ON-STATE POWER DISSIPATION

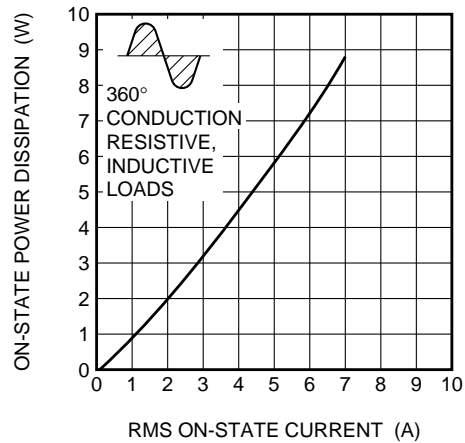


BCR5KM


The product guaranteed maximum junction temperature 150°C (See warning.)

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE


ALLOWABLE CASE TEMPERATURE VS. RMS ON-STATE CURRENT

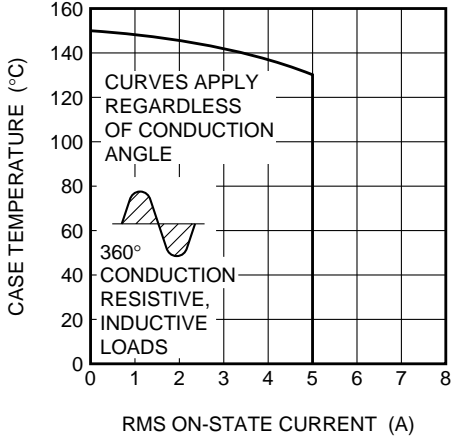


ALLOWABLE AMBIENT TEMPERATURE VS. RMS ON-STATE CURRENT

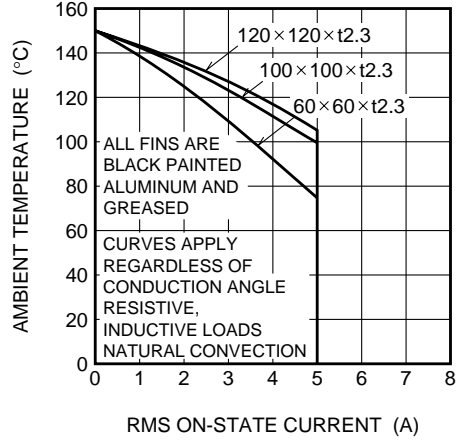


ALLOWABLE AMBIENT TEMPERATURE VS. RMS ON-STATE CURRENT

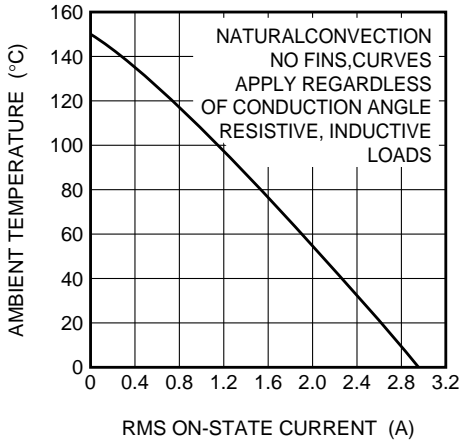


REPETITIVE PEAK OFF-STATE CURRENT VS. JUNCTION TEMPERATURE

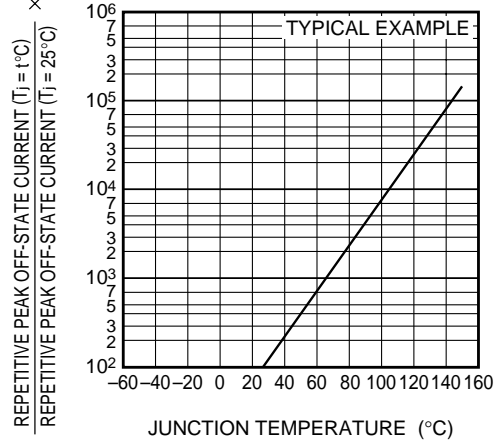

HOLDING CURRENT VS. JUNCTION TEMPERATURE

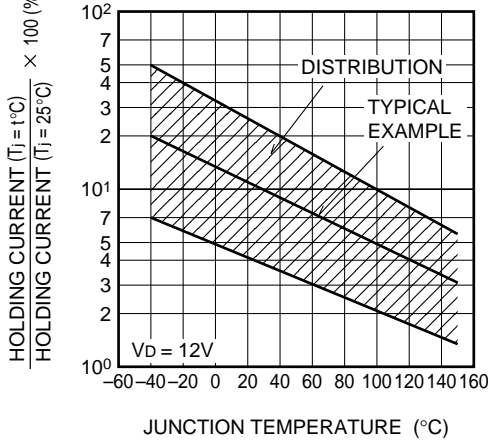





LACHING CURRENT VS. JUNCTION TEMPERATURE

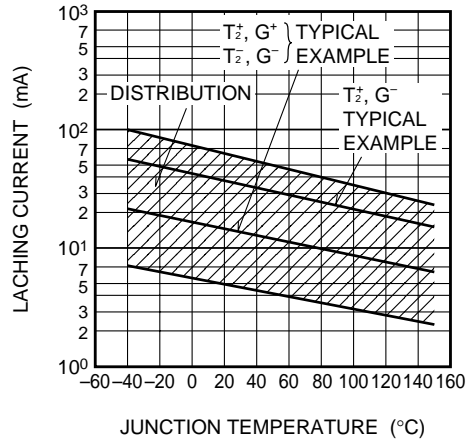



BCR5KM

The product guaranteed maximum junction temperature 150°C (See warning.)

MEDIUM POWER USE
INSULATED TYPE, PLANAR PASSIVATION TYPE

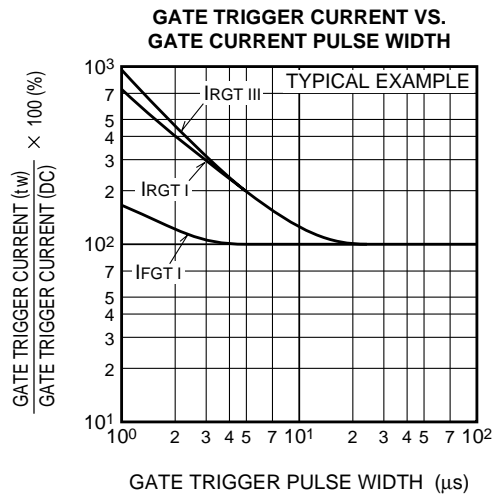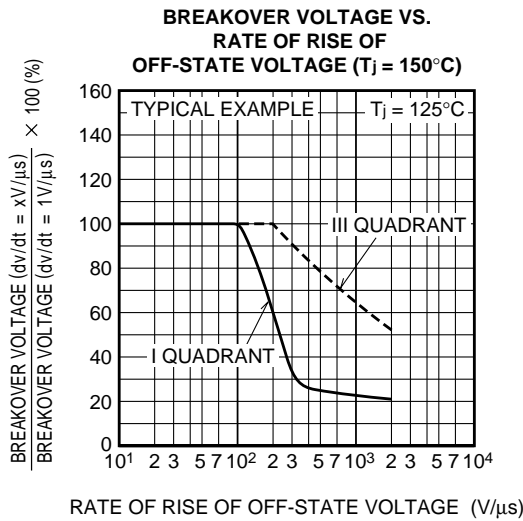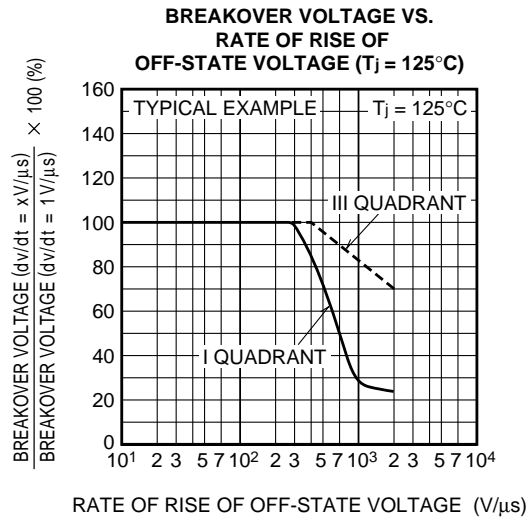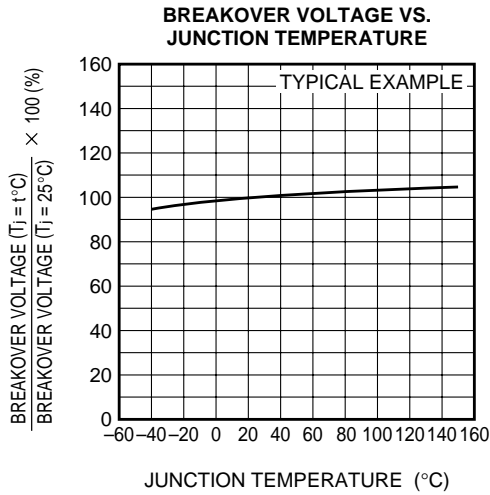

GATE TRIGGER CHARACTERISTICS TEST CIRCUITS

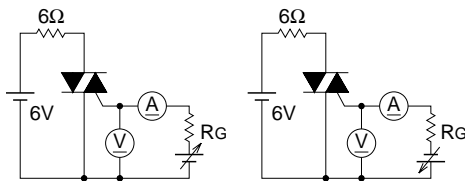

RECOMMENDED CIRCUIT VALUES AROUND THE TRIAC

