

Ultra-Small Ceramic Power Splitter/Combiner

SCN-2-11+ SCN-2-11

2 Way-0° 50Ω

800 to 1175 MHz



Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	20W* max.

*derate linearly to 6W at 100°C ambient.

Pin Connections

SUM PORT	2
PORT 1	6
PORT 2	4
GROUND	1,3,5
PORT 1-2	resistor external 100 OHMS

Features

- isolation resistor, external 100 ohms
- low insertion loss, 0.5 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 1.0 deg. typ.
- high isolation, 22 dB typ.
- excellent power handling, 20W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable, LTCC technology
- wrap around terminations for excellent solderability
- low cost
- patent pending

CASE STYLE: FV1206-1
PRICE: \$ 2.50 ea. QTY (10-49)
\$ 0.99 ea. QTY (100)


+ RoHS compliant in accordance with EU Directive (2002/95/EC)

See our web site for RoHS Compliance methodologies and qualifications.

Applications

- GSM
- ISM
- cellular

Outline Drawing

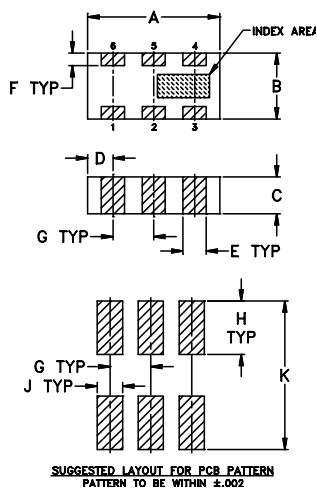


Outline Dimensions (inch/mm)

A	B	C	D	E	F
.126	.063	.037	.024	.022	.012
3.20	1.60	0.94	0.61	0.56	0.30

G	H	J	K	wt
.039	.042	.024	.123	grams
0.99	1.07	0.61	3.12	.020

Demo Board MCL P/N: TB-252 Suggested PCB Layout (PL-129)

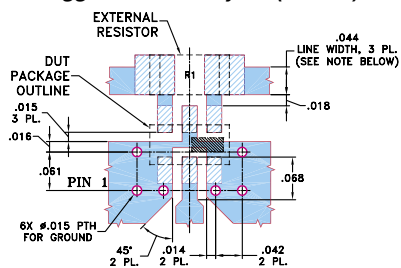

- NOTE:
1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS .020" ± .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.



- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Splitter Electrical Specifications

MODEL NO.	FREQUENCY (MHz)	INSERTION LOSS (dB)		ISOLATION (dB)	PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)			
		ABOVE 3.0 dB	Typ. Max.			Typ. Min.	Typ. Max.	Typ. Max.	INPUT Typ.	OUTPUT Typ.	
SCN-2-11(+)	800-1175	0.5	0.8	20	15	1.0	3.0	0.1	0.3	16	18
	875-1125	0.5	0.8	22	18	1.0	3.0	0.1	0.3	16	20

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	Return Loss (dB)		
	S-1	S-2				S	1	2
800.00	3.43	3.45	0.02	17.28	0.11	15.07	25.43	25.41
825.00	3.43	3.44	0.01	18.38	0.13	15.48	24.60	24.52
850.00	3.42	3.43	0.01	19.70	0.14	16.10	23.86	23.88
875.00	3.41	3.41	0.00	21.21	0.14	16.72	23.02	23.11
900.00	3.41	3.40	0.01	22.98	0.15	17.14	22.19	22.21
925.00	3.41	3.40	0.01	25.31	0.14	17.53	21.56	21.46
950.00	3.41	3.39	0.02	28.76	0.12	18.16	21.09	20.97
975.00	3.41	3.38	0.03	34.40	0.14	19.00	20.59	20.53
1000.00	3.41	3.37	0.04	42.99	0.16	19.65	20.02	19.96
1025.00	3.42	3.37	0.05	34.77	0.20	19.92	19.53	19.39
1050.00	3.43	3.37	0.06	28.77	0.23	20.08	19.20	19.01
1075.00	3.44	3.37	0.07	25.02	0.24	20.29	18.93	18.74
1100.00	3.45	3.37	0.08	22.45	0.27	20.43	18.61	18.40
1125.00	3.46	3.37	0.09	20.49	0.31	20.22	18.29	18.00
1150.00	3.48	3.38	0.10	18.83	0.34	19.53	18.05	17.69
1175.00	3.51	3.40	0.11	17.34	0.36	18.61	17.90	17.54

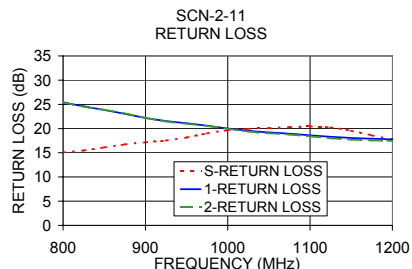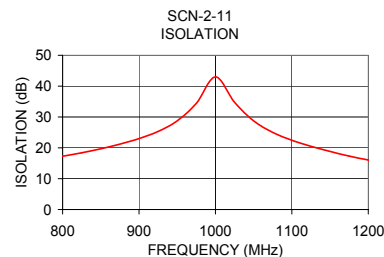

electrical schematic

