



SAW Components

Preliminary Data B4236

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are rendered in a glowing, white, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The background is dark and textured.



SAW Components

B4236

Low-Loss '2 in 1' Filter for Mobile Communication

769,0/809,5 MHz

Preliminary Data


Features

- Low-loss '2 in 1' RF filter for Trunked Radio
- Device with two integrated Rx filters
- Low amplitude ripple
- Usable passband filter 1: 31,0 MHz
- Usable passband filter 2: 14,0 MHz
- No matching network required for operation at 50 Ω
- Package for **Surface Mounted Technology (SMT)**
- RoHS Compliant

Terminals

- Ni, gold-plated


Ceramic package QCC8E

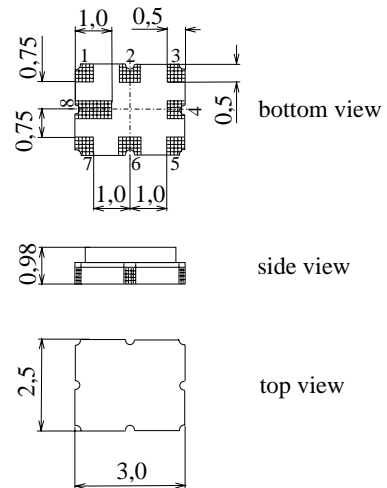

Dimensions in mm, approx. weight 27mg

Pin configuration

- | | |
|-----|-------------------|
| 1 | Input (filter 1) |
| 7 | Output (filter 1) |
| 3 | Input (filter 2) |
| 5 | Output (filter 2) |
| 2,6 | Ground |
| 4,8 | Case ground |



Type	Ordering code	Marking and Package according to	Packing according to
B4236	B39811-B4236-H410	C61157-A7-A92	F61074-V8174-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 40 / + 85	°C	Machine Model, 10 pulses source and load impedance 50 Ω
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V^*_{ESD}	100	V	
Source power (cw)	P_S	15	dBm	

*-acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



Preliminary Data

Characteristics filter 1

Operating temperature range: $T = 25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	809,5	—	MHz
Maximum insertion attenuation	α_{max}				
	794,0 ... 825,0 MHz	—	2,3	2,8	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	794,0 ... 825,0 MHz	—	0,9	1,4	dB
Group delay ripple (p-p)	$\Delta\tau$				
	794,0 ... 825,0 MHz	—	27,0	50,0	ns
Return loss (Input and Output)					
	794,0 ... 825,0 MHz	8,0	9,0	—	dB
Absolute attenuation	α_{abs}				
	0,0 ... 777,0 MHz	20	28	—	dB
	851,0 ... 1564,5 MHz	20	39	—	dB
	1564,5 ... 1594,5 MHz	30	43	—	dB
	2326,5 ... 2371,5 MHz	36	41	—	dB
Temperature coefficient of frequency	TC_f	—	- 36	—	ppm/K



Preliminary Data

Characteristics filter 1


Operating temperature range: $T = -30 \dots +70 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	809,5	—	MHz
Maximum insertion attenuation	α_{max}				
	794,0 ... 825,0 MHz	—	2,3	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	794,0 ... 825,0 MHz	—	0,9	1,9	dB
Group delay ripple (p-p)	$\Delta\tau$				
	794,0 ... 825,0 MHz	—	40,0	75,0	ns
Return loss (Input and Output)					
	794,0 ... 825,0 MHz	8,0	9,0	—	dB
Absolute attenuation	α_{abs}				
	0,0 ... 777,0 MHz	20	27	—	dB
	851,0 ... 1564,5 MHz	20	37	—	dB
	1564,5 ... 1594,5 MHz	30	43	—	dB
	2326,5 ... 2371,5 MHz	36	41	—	dB
Temperature coefficient of frequency	TC_f	—	- 36	—	ppm/K




Preliminary Data

Transfer function filter 1 (narrow band)

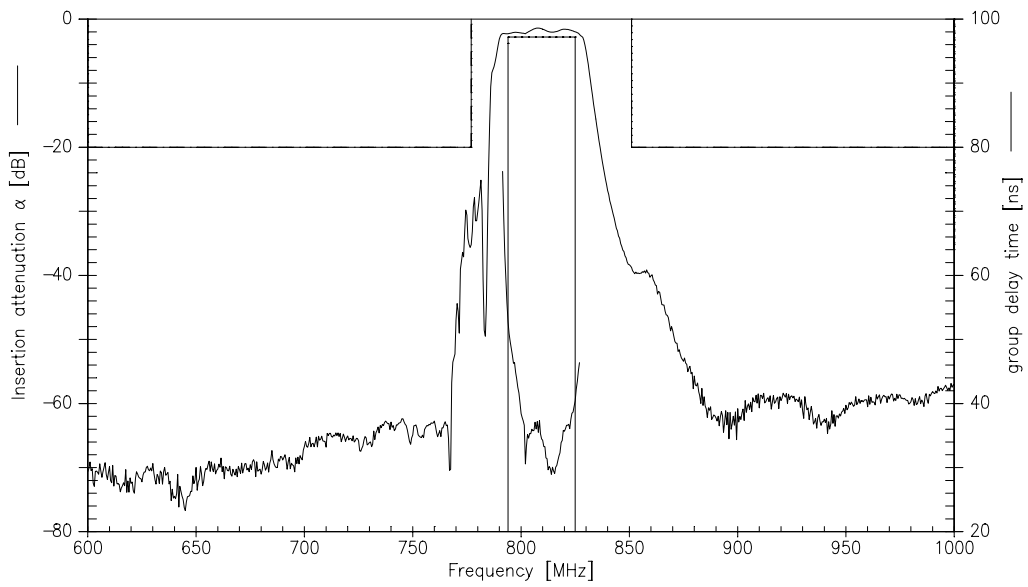

Transfer function filter 1 (wide band)

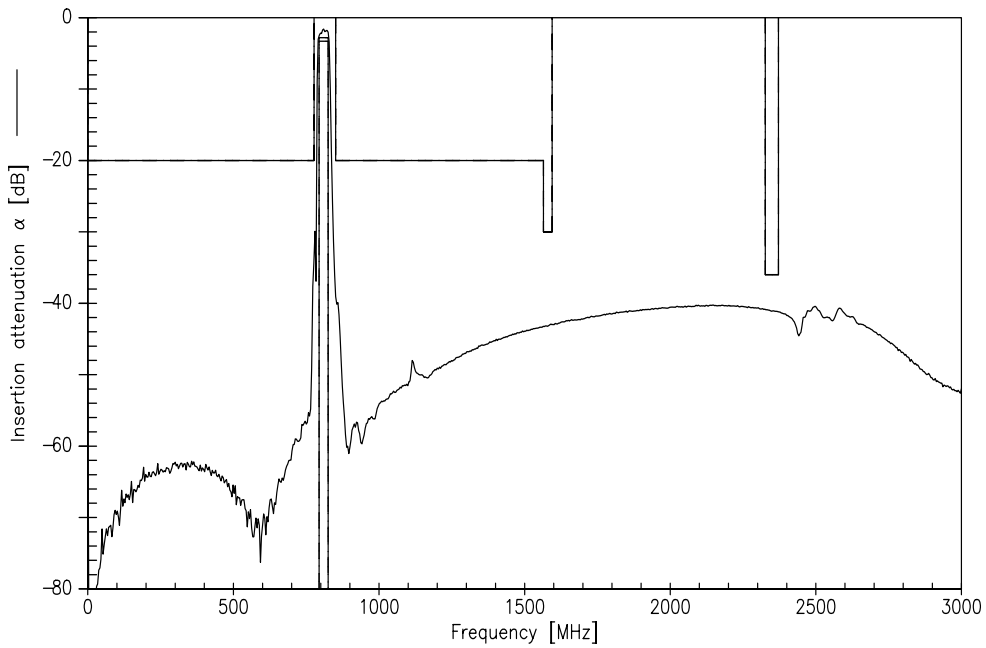



Preliminary Data

Characteristics filter 2

Operating temperature range: $T = 25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	769,0	—	MHz
Maximum insertion attenuation	α_{max}				
	762,0 ... 776,0 MHz	—	1,7	2,4	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	762,0 ... 776,0 MHz	—	0,4	1,0	dB
Group delay ripple (p-p)	$\Delta\tau$				
	762,0 ... 776,0 MHz	—	22,0	50,0	ns
Return loss (Input and Output)					
	762,0 ... 776,0 MHz	12,0	13,5	—	dB
Absolute attenuation	α_{abs}				
	0,0 ... 431,0 MHz	57	60	—	dB
	431,0 ... 604,0 MHz	50	60	—	dB
	604,0 ... 690,0 MHz	30	58	—	dB
	690,0 ... 733,0 MHz	20	52	—	dB
	733,0 ... 752,0 MHz	9	22	—	dB
	804,0 ... 847,0 MHz	25	36	—	dB
	847,0 ... 892,7 MHz	30	52	—	dB
	892,7 ... 910,7 MHz	50	56	—	dB
	910,7 ... 995,3 MHz	47	54	—	dB
	995,3 ... 1121,0 MHz	42	52	—	dB
	1524,0 ... 1554,0 MHz	30	42	—	dB
	2286,0 ... 2331,0 MHz	30	39	—	dB
Temperature coefficient of frequency	TC_f	—	- 36	—	ppm/K



Preliminary Data

Characteristics filter 2


Operating temperature range: $T = -30 \dots +70 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Nominal frequency	f_N	—	769,0	—	MHz
Maximum insertion attenuation	α_{max}				
	762,0 ... 776,0 MHz	—	1,8	2,6	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	762,0 ... 776,0 MHz	—	0,5	1,0	dB
Group delay ripple (p-p)	$\Delta\tau$				
	762,0 ... 776,0 MHz	—	30,0	50,0	ns
Return loss (Input and Output)					
	762,0 ... 776,0 MHz	12,0	13,5	—	dB
Absolute attenuation	α_{abs}				
	0,0 ... 431,0 MHz	57	60	—	dB
	431,0 ... 604,0 MHz	50	60	—	dB
	604,0 ... 690,0 MHz	30	58	—	dB
	690,0 ... 733,0 MHz	20	52	—	dB
	733,0 ... 752,0 MHz	9	18	—	dB
	804,0 ... 847,0 MHz	25	36	—	dB
	847,0 ... 892,7 MHz	30	52	—	dB
	892,7 ... 910,7 MHz	50	56	—	dB
	910,7 ... 995,3 MHz	47	54	—	dB
	995,3 ... 1121,0 MHz	42	52	—	dB
	1524,0 ... 1554,0 MHz	30	42	—	dB
	2286,0 ... 2331,0 MHz	30	39	—	dB
Temperature coefficient of frequency	TC_f	—	- 36	—	ppm/K




Preliminary Data

Transfer function filter 2 (narrow band)

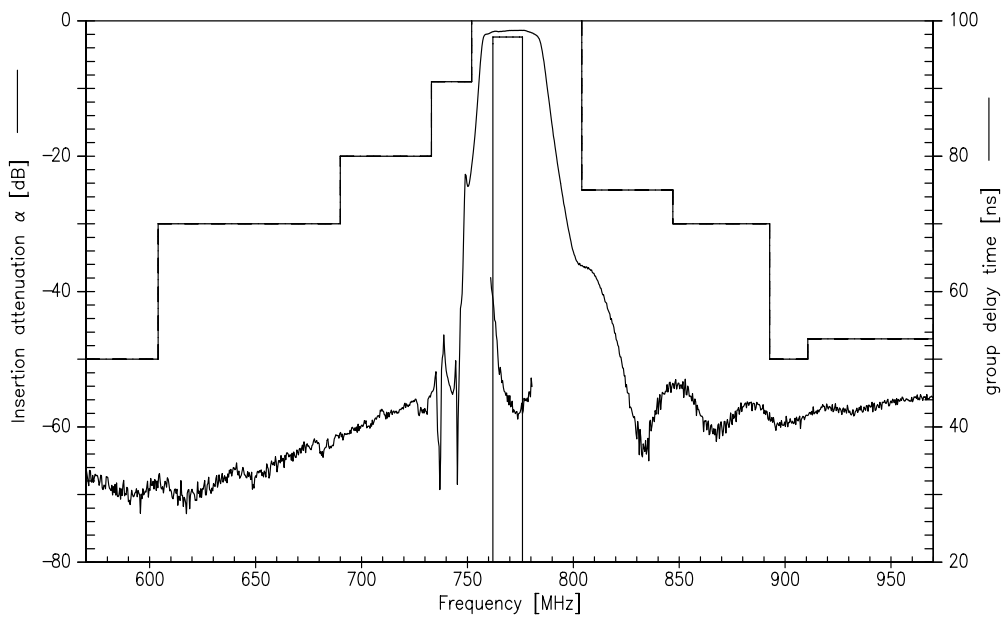

Transfer function filter 2 (wide band)

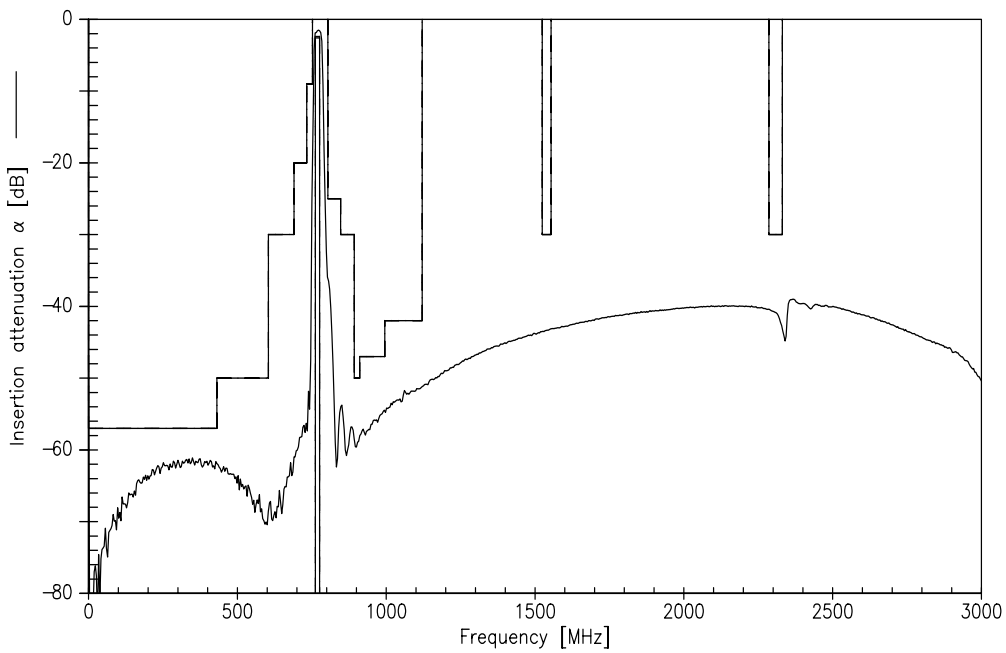



SAW Components

B4236

Low-Loss '2 in 1' Filter for Mobile Communication

769,0/809,5 MHz

Preliminary Data

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW COM WT PD

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2005. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.