



Why LEDs? Datasheets Order / RFQ Reps / Dists Media About Us Catalogs/Lit. Samples Site Map Survey

Home Datasheet Home Miniature Based Medium Based Panel PCB Discrete SMT Custom&RGB SafetyLED LED Specs [SEARCH]


Snap-In Panel Mount LED Lamps 5/16in. (8.0mm)

[click here to access pdf file of this page](#)


Snap-In and Bolt-On Panel Mount LED Lamps Pages:

[\[5/32-1/4in. Snap-In\]](#) [\[1/4 - 5/16in. Bolt-On\]](#) [\[1/4 - 5/16in. Bolt-On\]](#) [\[1/2in. 1-chip Snap-In\]](#) [\[1/2in. multi-chip Snap-In\]](#)

5/16" (8.0mm) Snap-In Panel Mount LEDs

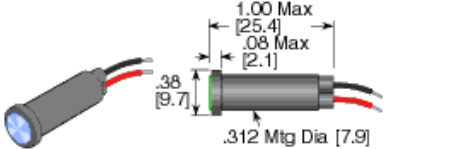

PPS312-W (Low-Profile Lens)

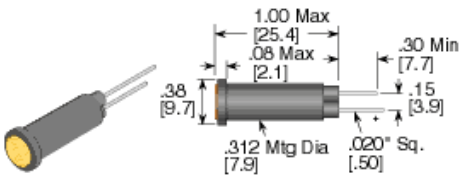


PPS312-T (Low-Profile Lens)


Series **PPS312** **CWR3K** - **14V** - **W6** Options
T = Terminal Type
W6 = 6" Wire Leads

LED/Lens Type & Color		Std. Operating Voltage
Water Clear Lens (Super Intensity)	Diffused Lens (Std Intensity)	DC
CWR3K = SP Red ●	TR6 = ULRed ●	2Vf
CWO3K = SP Orange ●	TR4/5 = HE Red ●	3.5Vf
CWY3K = SP Yellow ●	TO4/5 = Orange ●	5/6V
CW1K = C. White ○	TY4/5 = Yellow ●	12/14V
CWG1K = UL Green ●	TG4/5 = HE Green ●	24V
CWAG6K = A. Green ●	TPG4/5 = PGreen ●	28V
CWB1K = SPBlue ●	TWRG4 = BiColor Red/Green ●	
CIR881 = 880nm IR ●	TWYG4 = BiColorYel/Green ●	

5/16" (8.0mm) Snap-In Panel Mount LEDs

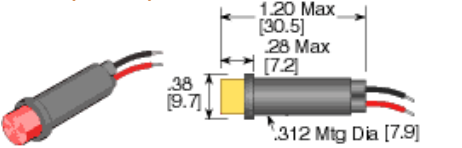

PP312-W (Top-Hat Lens)

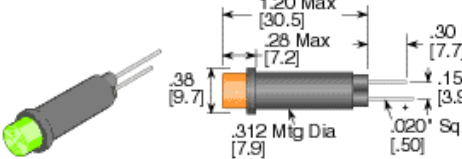


PP312-T (Top-Hat Lens)


Series **PP312** **CWR3K** - **14V** - **W6** Options
T = Terminal Type
W6 = 6" Wire Leads

LED/Lens Type & Color		Std. Operating Voltage
Water Clear Lens (Super Intensity)	Diffused Lens (Std Intensity)	DC
CWR3K = SP Red ●	TR6 = ULRed ●	2Vf
CWO3K = SP Orange ●	TR4/5 = HE Red ●	3.5Vf
CWY3K = SP Yellow ●	TO4/5 = Orange ●	5/6V
CW1K = C. White ○	TY4/5 = Yellow ●	12/14V
CWG1K = UL Green ●	TG4/5 = HE Green ●	24V
CWAG6K = A. Green ●	TPG4/5 = PGreen ●	28V
CWB1K = SPBlue ●	TWRG4 = BiColor Red/Green ●	
CIR881 = 880nm IR ●	TWYG4 = BiColorYel/Green ●	

5/16" (8.0mm) Snap-In Panel Mount LEDs

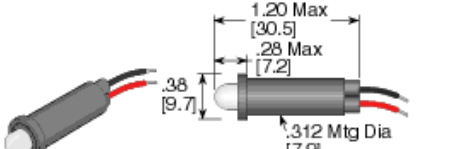

PPD312-W (5mm Dome Lens)

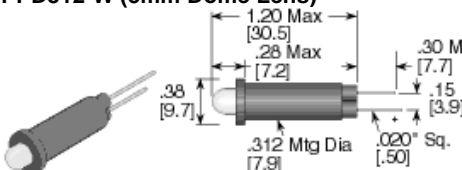


PPD312-T (5mm Dome Lens)

Series **PPD312** **CWR3K** - **14V** - **W6** Options
T = Terminal Type
W6 = 6" Wire Leads

LED/Lens Type & Color		Std. Operating Voltage
Water Clear Lens (Super Intensity)	Diffused Lens (Std Intensity)	DC
CWR3K = SP Red ●	TR6 = ULRed ●	2Vf
CWO3K = SP Orange ●	TR4/5 = HE Red ●	3.5Vf
CWY3K = SP Yellow ●	TO4/5 = Orange ●	5/6V
CW1K = C. White ○	TY4/5 = Yellow ●	12/14V
CWG1K = UL Green ●	TG4/5 = HE Green ●	24V
CWAG6K = A. Green ●	TPG4/5 = PGreen ●	28V
CWB1K = SPBlue ●	TWRG4 = BiColor Red/Green ●	
CIR881 = 880nm IR ●	TWYG4 = BiColorYel/Green ●	

Notes: Super-Intensity Diffused LEDs Available for Special Applications

Mounting Clip Part No. SN312



23105 Kashiwa Ct, Torrance, CA 90505 - PH: (800) 579-4875/(310) 534-1505 - FAX: (310) 534-1424

© Copyright 1997-2001 LEDtronics, Inc. All Rights Reserved - Contact Webmaster@ledtronics.com