
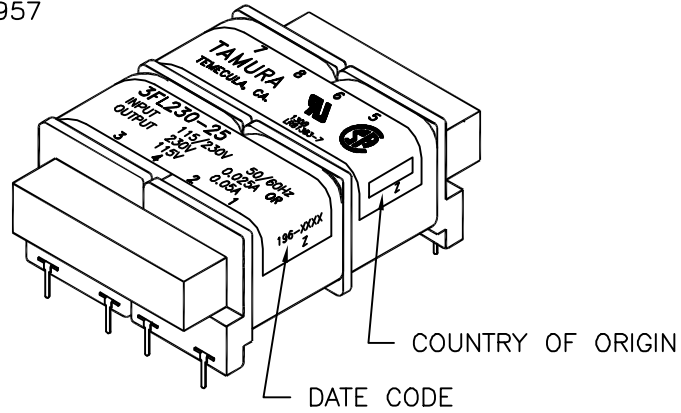


REV. Status


REVISION – 3/17/92 TS
REVISION A TEMECULA WAS CARSON. UPDATED LABELS 12/15/93 TS
REVISION B REFORMATTED & ADDED CLASS B 8/29/95 TS
REVISION C CHANGED A.1 TO 230V 12/22/00 TS

MODEL NUMBER
3FL230-25

- A. Electrical Specifications (@ 25 ° C)
1. Input Voltage and Frequency; 115/230V 50/60 Hz
 2. Output Voltage; 230V ±5% @ 0.025A load, series
115V ±5% @ 0.05A load, parallel
 3. Output Power; 6 VA
 4. Insulation Resistance;
100 MΩ MIN @ 500VDC, Pri to Sec, Pri to Core, Sec to Core
 5. Hi-Pot;
1500 Vrms 1 minute @ Pri to Sec, Pri to Core
1500 Vrms 1 minute @ Sec to Core
 6. Temperature Rating; 130°C (UL Class "B")
- B. Marking; 3FL230-25, TAMURA TEMECULA CA, date code, country of origin, Input and output ratings, terminal numbers, safety symbols and "130B".
- C. Safety:
UL approved, file E145619
Insulation Class B (130° C) File E92957
CSA Certified, file LR81383-7
- D. Schematic Diagram:

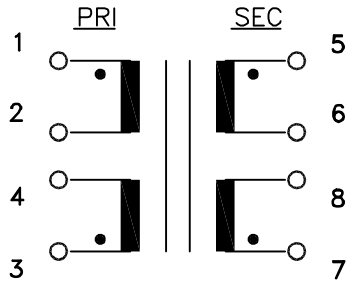

- E. Mechanical Specifications:
All dimensions nominal unless otherwise specified.

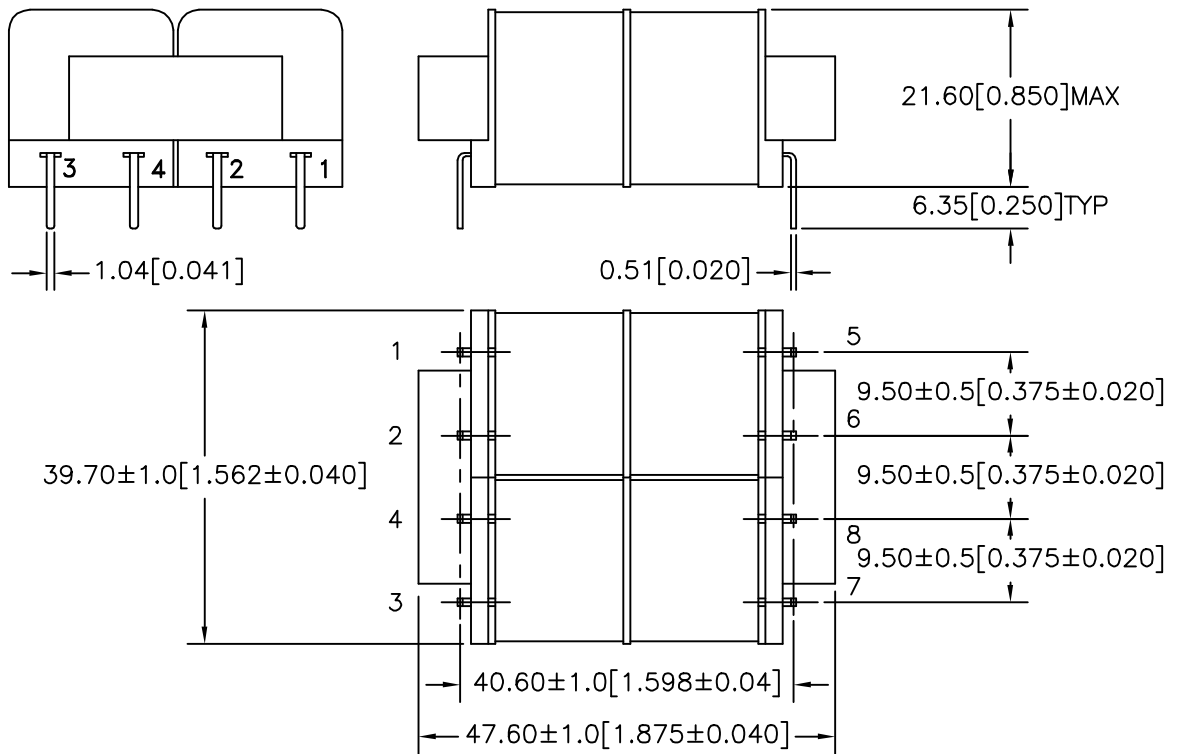

PREPARED BY:

D. Rund

ENGINEER:

T. Shiozawa

QUALITY CONTROL:

D. Kelley

APPROVED:

J. Coleman

DWG CONTROL NO.
P-A1-10605
ACAD\3F\A1106051.DWG

REV

C

3 FLANGE BOBBIN
POWER TRANSFORMER

TAMURA CORPORATION OF AMERICA

43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

3FL230-25

MODEL SPECIFICATION

DIM: mm(in) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.