

**Cascadable Amplifier  
10 kHz to 2500 MHz**

**A3010/ SMA3010**

V2

**Features**

- GAIN 9.5 dB (TYP.)
- DC COUPLED\*
- +/- 1 dB GAIN FLATNESS
- HIGH DRIVER OUTPUT LEVEL +18 dBm
- NPUT/OUTPUT MATCH <2.0:1 (TYP.)


**Description**

The A3010 RF amplifier is a discrete hybrid design, which uses thin film manufacturing processes for accurate performance and high reliability.

This single stage GaAs FET feedback amplifier design displays impressive performance characteristics over a broadband frequency range. An RF choke is used for DC power supply decoupling.

The TO-8 package is hermetically sealed, and MIL-STD-883 environmental screening is available.

**Product Image**

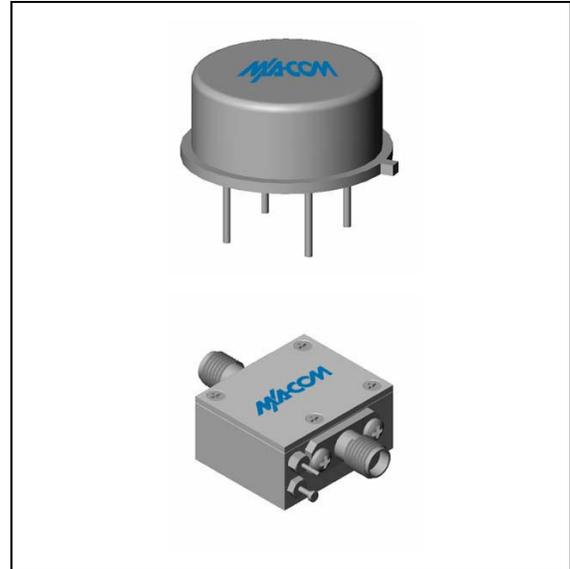

**Ordering Information**

Part Number	Package
A3010	TO-8
CA3010	SMA Connectorized

**Electrical Specifications:  $Z_0 = 50\Omega$ ,  $V_{CC} = +12 / -5.2 V_{DC}$**

Parameter	Units	Typical	Guaranteed	
		25°C	0° to 50°C	-54° to +85°C**
Frequency	MHz	0.010-2500	0.010-2500	0.010-2500
Small Signal Gain (min)	dB	9.5	8.5	8.0
Gain Flatness (max)	dB	±0.9	±1.0	±1.2
Reverse Isolation	dB	16		
Noise Figure (max)	dB	4.5	5.5	6.0
Power Output @ 1 dB comp. (min)	dBm	19.0	17.0	16.5
IP3	dBm	+35		
VSWR Input / Output (max)		2.0:1 / 2.0:1	2.2:1 / 2.2:1	2.3:1 / 2.3:1
DC Voltage - Positive	Volts	+12	+12	+12
DC Current - Positive (max)	mA	155	160	165
DC Voltage - Negative	Volts	-5.2	-5.2	-5.2
DC Current - Negative (max)	mA	15	20	25

\* External Input and output blocking capacitors required - 0.36  $\mu$ f nominal.

\*\* Over temperature performance limits for part number CA3010, guaranteed from 0°C to +50°C only.

**Absolute Maximum Ratings**

Parameter	Absolute Maximum
Storage Temperature	-62°C to +125°C
Case Temperature	125°C
DC Voltage	+18 V
Continuous Input Power	+17 dBm
Short Term Input power (1 minute max.)	100 mW
Peak Power (3 $\mu$ sec max.)	0.5 W
"S" Series Burn-In Temperature (case)	125°C

**Thermal Data:  $V_{CC} = +12 V_{DC}$**

Parameter	Rating
Thermal Resistance $\theta_{jc}$	105.6°C/W
Transistor Power Dissipation $P_d$	0.55 W
Junction Temperature Rise Above Case $T_{jc}$	58.1°C



**Cascadable Amplifier  
10 kHz to 2500 MHz**

**A3010/ SMA3010**


V2

**Typical Performance Curves at +25°C**

**Outline Drawing: TO-8 \***

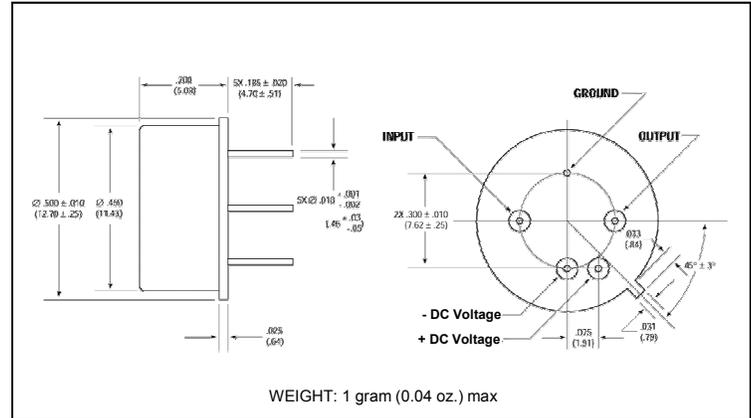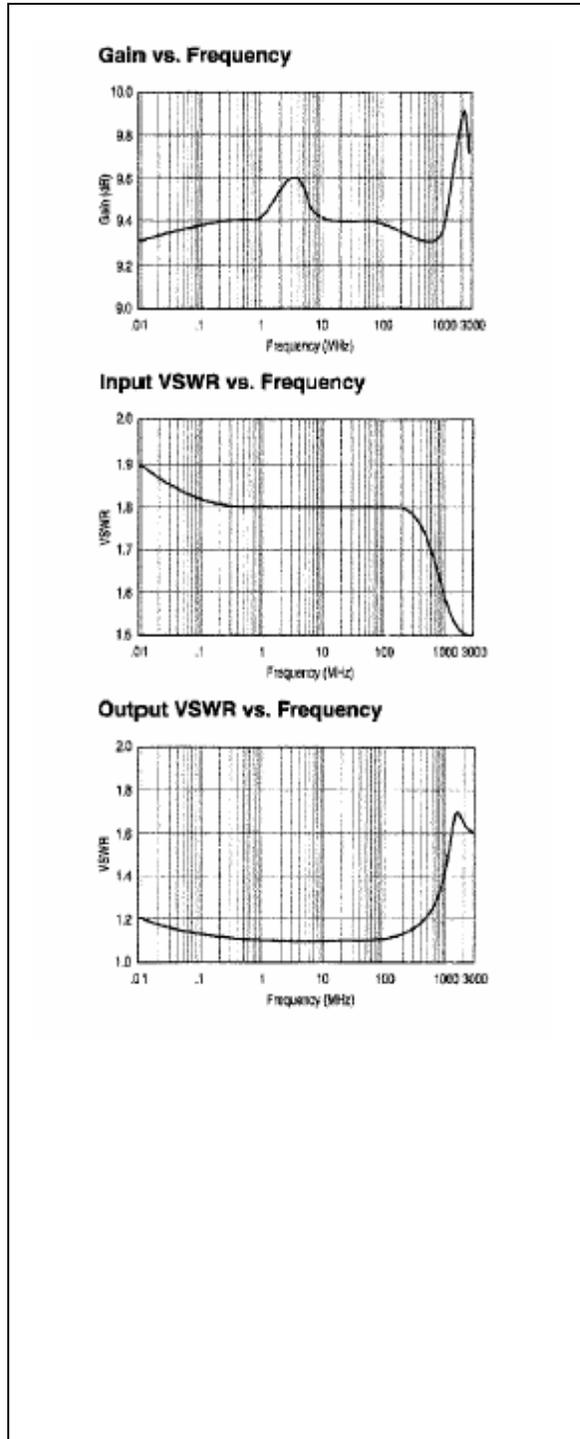

**Outline Drawing: SMA Connectorized \***

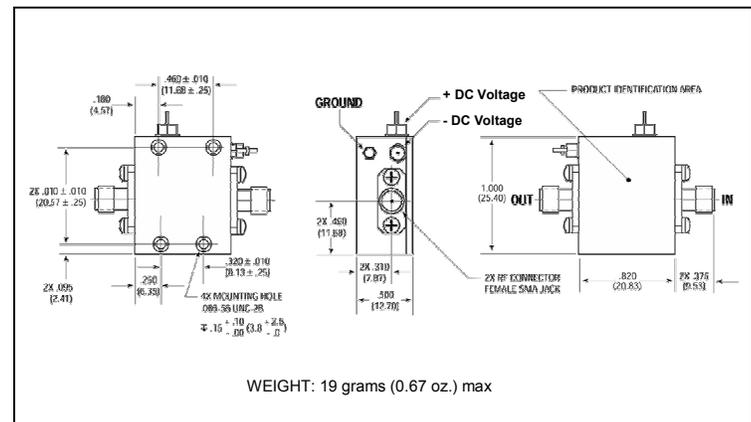

\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.