


E-Series Surface Mount Mixer 5 – 1000 MHz



Features

- LO Power +7 dBm
- Up to +1 dBm RF
- Surface Mount
- Low Profile




SM-89 Package

Note: Non Hermetic Package

Description

M/A-COM's ELCM-2 is a Low Cost, Broadband, high performance Double Balanced Mixer designed for use in high volume wireless applications. The device has been optimised by careful selection of the Schottky Diode and Balun Transformer for excellent performance. ELCM-2 is available in an SM-89 surface mount package and reflows using standard soldering reflow profiles.

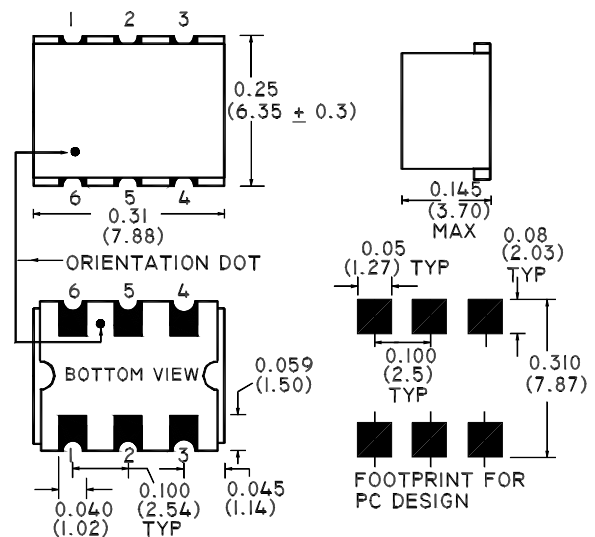

Electrical Specifications @ +25°C, Z₀ = 50 Ohms, LO = +7dBm

| Parameter | Units | Minimum | Typical | Maximum |
|------------------------------|-----------|---------|---------|---------|
| Frequency Range | | | | |
| RF | 5 - 1000 | MHz | — | — |
| LO | 5 - 1000 | MHz | — | — |
| IF | DC - 1000 | MHz | — | — |
| Conversion Loss | | | | |
| 10 - 500 | dB | — | 6.5 | 8.0 |
| 5 - 1000 | dB | — | 7.0 | 9.5 |
| Isolation (LO - RF) | | | | |
| 5 - 50 | MHz | 40 | 60 | — |
| 50 - 500 | MHz | 20 | 40 | — |
| 500 - 1000 | MHz | 18 | 25 | — |
| Isolation (LO - IF) | | | | |
| 5 - 50 | MHz | 30 | 55 | — |
| 50 - 500 | MHz | 20 | 30 | — |
| 500 - 1000 | MHz | 12 | 20 | — |
| RF Input for 1dB Compression | dBm | — | — | +1 |


V3.00 S 1352



M/A-COM Division of AMP Incorporated ■ North America: Tel. (800) 366-2266, Fax (800) 618-8883 ■ Asia/Pacific: Tel. +85 2 2111 8088, Fax +85 2 2111 8087 ■ Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

www.macom.com

AMP and Connecting at a Higher Level are trademarks.
Specifications subject to change without notice.



Absolute Maximum Ratings


| Parameter | Absolute Maximum |
|------------------------------|------------------|
| RF Power | 50 mW |
| Peak IF Current | 40 mA |
| Storage Temperature | -55°C to +100°C |
| Operating Temperature | -55°C to +100°C |
| Pin Temperature (10 Seconds) | 260°C |

Functional Configuration


| Function | Pin No. |
|-------------|---------|
| LO | 1 |
| RF | 4 |
| IF | 5 |
| Ground | 2, 3, 6 |
| Case Ground | — |
| Unconnected | — |

Typical Performance @ +25°C

Conversion Loss

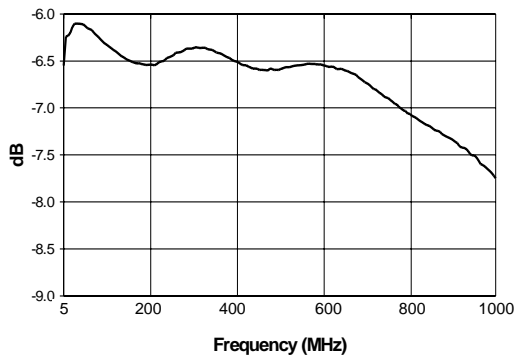

L-R Isolation

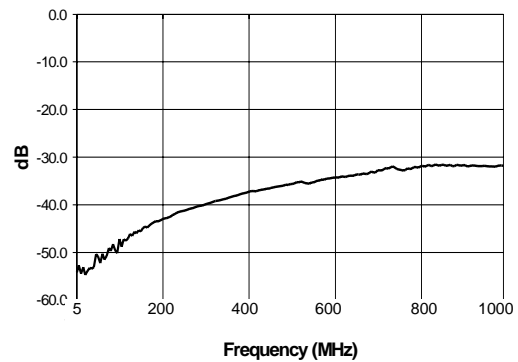

L-I Isolation

