



RF MOSFET Power Transistor, 8W, 12V 30 - 90 MHz

FH2164

V2.00

Features

- N-Channel Enhancement Mode Device
- Meets CECOM Drawing A3012715
- Designed for Frequency Hopping Systems
- 30-90 MHz
- Lower Capacitances for Broadband Operation
- Lower Noise Figure Than Bipolar Devices

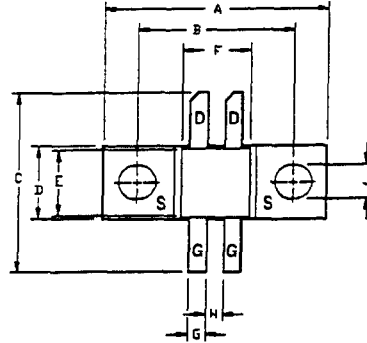

Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Drain-Source Voltage	V_{DS}	65	V
Gate-Source Voltage	V_{GS}	20	V
Drain-Source Current	I_{DS}	4*	A
Power Dissipation	P_D	61*	W
Junction Temperature	T_J	200	°C
Storage Temperature	T_{STG}	-55 to +150	°C
Thermal Resistance	θ_{JC}	1.5	°C/W

LETTER DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	20.70	20.96	.815	.825
B	14.35	14.61	.565	.575
C	15.67	17.45	.617	.687
D	6.27	6.53	.247	.257
E	6.22	6.48	.245	.255
F	6.22	6.48	.245	.255
G	1.40	1.65	.055	.065
H	1.40	1.65	.055	.065
J	2.92	3.18	.115	.125
K	1.40	1.65	.055	.065
L	1.96	2.46	.077	.097
M	3.61	4.37	.142	.172
N	.08	.13	.003	.005

Electrical Characteristics at 25°C

Parameter	Symbol	Min	Max	Units	Test Conditions
Drain-Source Breakdown Voltage	BV_{DSS}	65	-	V	$V_{GS}=0.0\text{ V}$, $I_{DS}=5.0\text{ mA}^*$
Drain-Source Leakage Current	I_{DSS}	-	1.0	mA	$V_{DS}=28.0\text{ V}$, $V_{GS}=0.0\text{ V}^*$
Gate-Source Leakage Current	I_{GSS}	-	1.0	μA	$V_{GS}=20.0\text{ V}$, $V_{DS}=0.0\text{ V}^*$
Gate Threshold Voltage	$V_{GS(TH)}$	2.0	6.0	V	$V_{DS}=10.0\text{ V}$, $I_{DS}=100.0\text{ mA}^*$
Forward Transconductance	G_M	500	-	mS	$V_{DS}=28.0\text{ V}$, $I_{DS}=1000.0\text{ mA}$, $\Delta V_{GS}=1.0\text{ V}$, 80 μs Pulse*
Input Capacitance	C_{ISS}	-	45	pF	$V_{DS}=28.0\text{ V}$, $F=1.0\text{ MHz}^*$
Output Capacitance	C_{OSS}	-	40	pF	$V_{DS}=28.0\text{ V}$, $F=1.0\text{ MHz}^*$
Reverse Capacitance	C_{RSS}	-	8	pF	$V_{DS}=28.0\text{ V}$, $F=1.0\text{ MHz}^*$
Power Gain	G_P	13	-	dB	$V_{DD}=12.0\text{ V}$, $I_{D0}=600\text{ mA}$, $P_{OUT}=8.0\text{ W}$, $F=88\text{ MHz}$
Drain Efficiency	η_D	55	-	%	$V_{DD}=12.0\text{ V}$, $I_{D0}=600\text{ mA}$, $P_{OUT}=8.0\text{ W}$, $F=88\text{ MHz}$
Load Mismatch Tolerance	VSWR-T	-	20:1	-	$V_{DD}=12.0\text{ V}$, $I_{D0}=600\text{ mA}$, $P_{OUT}=8.0\text{ W}$, $F=88\text{ MHz}$

* Per side

Specifications Subject to Change Without Notice.

9-66

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020