G Series

High Performance RFI Filters for Switching Power Supply



UL Recognized CSA Certified VDE Approved


G Series

The G series RFI filters are designed to provide excellent common-mode and differential-mode attenuation for most digital electronic equipment (particularly switching power supplies) over the frequency range of 20kHz to 30MHz.


These filters are a size- and cost-effective solution for equipment that must meet the conducted emission limits of EN55022 Level A requirements, as well as FCC Part 15J, Class B.

The EG models also meet the very low leakage current requirements of SEV and VDE portable equipment as well as (120 volt) UL 544 nonpatient medical equipment.

Electrical Schematics 6EG & 6VG Models




10EG & 10VG Models



Resistor location for reference only.

(())

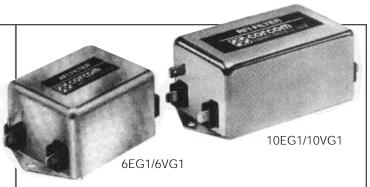

Specifications

	EG Models	VG Models	
Maximum leakage current each line-to-ground @ 120 VAC 60 Hz: @ 250 VAC 50 Hz:	.30 mA .50 mA	1.2 mA 2.0 mA	
Hipot rating (one minute): line-to-ground line-to-line	2250 VDC 1450 VDC		
Operating frequency:	50/60 Hz		
Rated voltage:	120/25	50 VAC	
Rated current:	@120 VAC	@ 250 VAC	
6EG1/6VG1 10EG1/10VG1	6A 10A	5A 8A	

Minimum insertion loss in dB:

Line-to-ground in 50 ohm circuit

0				
MHz	6EG1	10EG1	6VG1	10VG1
.01	6	8	4	5
.05	19	10	18	10
.07	23	15	21	24
.1	25	18	25	37
.15	29	42	30	50
.5	48	64	56	72
1	44	65	55	70
5	43	65	53	70
10	40	60	45	60
30	40	60	45	60


Line-to-line in 50 ohm circuit

MHz	6EG1	10EG1	6VG1	10VG1
.01	4	5	4	5
.05	6	5	7	5
.07	10	5	7	7
.1	24	26	26	26
.15	37	40	39	39
.5	66	65	67	65
1	75	65	75	60
5	72	60	68	60
10	50	70	55	70
30	50	70	55	70

Series G

Case Style Metric shown in italics.

EG1 & VG1



Typical dimensions Terminals: $\frac{.250}{6.35}$ (5) Holes: $\frac{.07}{7.8}$ Dia.(4) Slot: $\frac{.07 \times .16}{7.8 \times 4.1}$ Mounting holes: $\frac{.188}{4.78}$ Dia. (2)

Case Dimensions

Metric shown in italics.

Part No.	A (max)	B (max)	C (max)	D <u>± .015</u> ± .38	E (max)
6EG1	3.56	2.15	<u> </u>	2.938	3.38 <i>85.8</i>
6VG1	<u>3.56</u> 90.4	<u>2.15</u> 54.6	<u> 1.56 </u> <i>39.6</i>	2.938 74.63	<u>3.38</u> <i>85.8</i>
10EG1	4.69	2.27	1.8	4.063	4.47
10VG1	4.69	2.27	<u> </u>	4.063 103.2	4.47 113.5

Pricing

Consult your local Corcom sales representative for pricing.

Part No.	Part No.
6EG1	6VG1
10EG1	10VG1

