


New!

NTD Series

Radial Lead Type

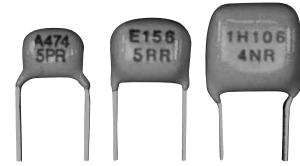


◆FEATURES

1. Small in size and wide capacitance range.
Max. 22 μ F is available.
2. Temperature characteristic is X7R in EIA code.
3. Superior humidity characteristic and long life.
4. Excellent high frequency characteristic due to low ESR.
5. High rated ripple current.
6. 250V_{dc} items are available.
7. Resin(UL94 V-0) used for coating.
8. **RoHS Compliant**
Pb-free design(also ceramic dielectric)

◆APPLICATIONS

1. Smoothing circuit of switching mode AC-DC or DC-DC converter.
2. Noise suppressor for various kinds of equipments.
3. By-pass or decoupling circuits.
4. Automotive equipments.

◆CONSTRUCTION

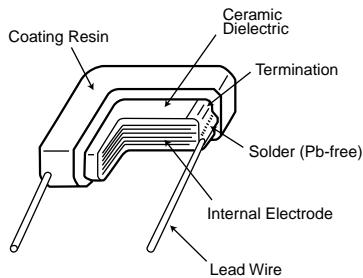

◆RATINGS

1. Category Temperature Range	-55 to +125°C
2. Rated Voltage Range	25, 50, 100, 250 V _{dc}
3. Rated Capacitance Range	0.1 to 22 μ F
4. Rated Capacitance Tolerance	M(\pm 20%)
5. Temperature Characteristics	X7R
6. Rated Ripple Current	See No.5 on the following table

◆SPECIFICATIONS


No.	Items		Specification	Test Condition													
1	Withstand Voltage	Between Terminals	No abnormality.	250% of rated voltage shall be applied for 5 seconds. (Only 250V _{dc} products : 475V)													
		Terminals to Coating Resin															
2	Insulation Resistance		100/C _R (M Ω) or 4000(M Ω) whichever is less.	Rated voltage shall be applied for 60 \pm 5 seconds at temperature 25 \pm 2°C.													
3	Rated Capacitance		Within specified tolerance.	<table border="1"> <tr> <td></td> <td>C_R≤10μF</td> <td>C_R>10μF</td> </tr> <tr> <td>Temperature</td> <td colspan="2">25\pm2°C</td> </tr> <tr> <td>Frequency</td> <td>1\pm0.1kHz</td> <td>120\pm12Hz</td> </tr> <tr> <td>Voltage</td> <td>1\pm0.2V_{rms}</td> <td>0.5\pm0.2V_{rms}</td> </tr> </table>			C _R ≤10 μ F	C _R >10 μ F	Temperature	25 \pm 2°C		Frequency	1 \pm 0.1kHz	120 \pm 12Hz	Voltage	1 \pm 0.2V _{rms}	0.5 \pm 0.2V _{rms}
	C _R ≤10 μ F	C _R >10 μ F															
Temperature	25 \pm 2°C																
Frequency	1 \pm 0.1kHz	120 \pm 12Hz															
Voltage	1 \pm 0.2V _{rms}	0.5 \pm 0.2V _{rms}															
4	Dissipation Factor		5.0% maximum.														

◆SPECIFICATIONS

No.	Items	Specification	Test Condition															
5	Rated Ripple Current	<table border="1"> <tr> <td>Size code</td> <td>32</td> <td>43</td> <td>55</td> </tr> <tr> <td>Arms</td> <td>0.3</td> <td>0.8</td> <td>1.0</td> </tr> </table>	Size code	32	43	55	Arms	0.3	0.8	1.0	10kHz to 1MHz (sine curve) Ripple voltage V_p shall be less than the rated voltage.							
Size code	32	43	55															
Arms	0.3	0.8	1.0															
6	Robustness of Terminations	No visible damage.	The force applied shall be : <table border="1"> <tr> <td>Lead ϕ (mm)</td> <td>Tensile(N)</td> <td>(sec.)</td> </tr> <tr> <td>0.5 max.</td> <td>5</td> <td>10±1</td> </tr> </table> <table border="1"> <tr> <td>Lead ϕ (mm)</td> <td>Bending(N)</td> <td>(kg)</td> </tr> <tr> <td>0.5 max.</td> <td>2.5</td> <td>0.25</td> </tr> </table> Time : 2times.	Lead ϕ (mm)	Tensile(N)	(sec.)	0.5 max.	5	10±1	Lead ϕ (mm)	Bending(N)	(kg)	0.5 max.	2.5	0.25			
Lead ϕ (mm)	Tensile(N)	(sec.)																
0.5 max.	5	10±1																
Lead ϕ (mm)	Bending(N)	(kg)																
0.5 max.	2.5	0.25																
7	Vibration	Appearance : No abnormality. Capacitance : To meet the initial specification. D.F. : To meet the initial specifications.	Amplitude : 1.5mm Frequency range : 10-55-10Hz (1 min) Direction and time : 2 hours each to X, Y, Z axis. Total 6 hours.															
8	Solderability	Min. 75% of surface of the termination shall be covered with new solder.	Solder Temperature : 235±5°C Dipping Time : 2±0.5 sec. Solder : H60A or H63A															
9	Resistance to Soldering Heat	Appearance : No abnormality. $\Delta C/C$: ±15% D.F. : Satisfy the initial spec.	Solder Temperature : 350±10°C Dipping Time : 3±0.5 sec. Depth : 1.5 to 2mm															
10	Temperature Cycle	Appearance : No abnormality.	<table border="1"> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>(min.)</th> </tr> <tr> <td>1</td> <td>Min. Category temperature ±3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>3 max.</td> </tr> <tr> <td>3</td> <td>Max. Category temperature ±2</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>3 max.</td> </tr> </table> For 5 cycles for above temperature cycle.	Step	Temperature (°C)	(min.)	1	Min. Category temperature ±3	30±3	2	Room temperature	3 max.	3	Max. Category temperature ±2	30±3	4	Room temperature	3 max.
Step	Temperature (°C)	(min.)																
1	Min. Category temperature ±3	30±3																
2	Room temperature	3 max.																
3	Max. Category temperature ±2	30±3																
4	Room temperature	3 max.																
11	Humidity Load Life	Appearance : No abnormality. $\Delta C/C$: ±20% D.F. : 10% maximum I.R. : 25/ C_R (M Ω) or 1000(M Ω) whichever is less. Withstand voltage : No abnormality.	Temperature : 40±2°C Humidity : 90 to 95%RH Voltage : Rated voltage Time : 500± ²⁴ ₀ hours															
12	Endurance	Appearance : No abnormality. $\Delta C/C$: ±20% D.F. : 10% maximum I.R. : 50/ C_R (M Ω) or 1000(M Ω) whichever is less. Withstand voltage : No abnormality.	Temperature : 85±2°C Voltage : 200% of rated voltage. Time : 1000± ⁴⁸ ₀ hours Temperature : 125±3°C Voltage : Rated voltage Time : 1000± ⁴⁸ ₀ hours															

*Cr : Rated Capacitance(μ F)

◆PART NUMBERING SYSTEM

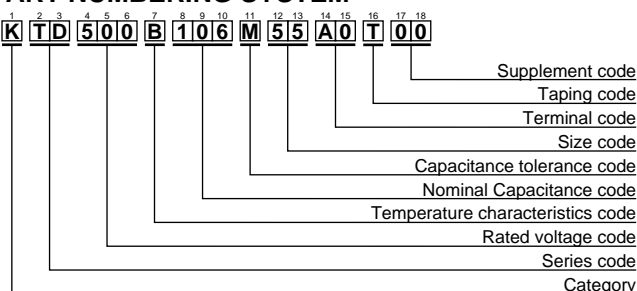

◆NTD SERIES STANDARD RATINGS

Part Number	Rated voltage (Vdc)	Rated Capacitance (μF)	Dimensions(mm)					
			Lmax.	Wmax.	Tmax.	F±0.8	φd±0.05	
KTD250B335M32A0T00	25	3.3	5.0	6.0	3.5	5.0	0.5	
KTD250B475M32A0T00		4.7						
KTD250B685M43A0T00		6.8						
KTD250B106M43A0T00		10	6.5	6.5	4.0	5.0	0.5	
KTD250B156M55A0T00		15						
KTD250B226M55A0T00		22						
KTD500B105M32A0T00	50	1.0	5.0	6.0	3.5	5.0	0.5	
KTD500B155M32A0T00		1.5						
KTD500B225M32A0T00		2.2						
KTD500B335M32A0T00		3.3						
KTD500B475M43A0T00		4.7	6.5	6.5	4.0	5.0	0.5	
KTD500B685M43A0T00		6.8						
KTD500B106M55A0T00		10						
KTD500B156M55A0T00		15						
KTD101B334M32A0T00		100	0.33	5.0	6.0	3.5	5.0	0.5
KTD101B474M32A0T00			0.47					
KTD101B684M32A0T00	0.68							
KTD101B105M32A0T00	1.0							
KTD101B155M43A0T00	1.5		6.5	6.5	4.0	5.0	0.5	
KTD101B225M43A0T00	2.2							
KTD101B335M55A0T00	3.3							
KTD101B475M55A0T00	4.7							
KTD251B104M32A0T00	250	0.1	5.0	6.0	3.5	5.0	0.5	
KTD251B154M32A0T00		0.15						
KTD251B224M32A0T00		0.22						
KTD251B334M43A0T00		0.33						
KTD251B474M43A0T00		0.47	6.5	6.5	4.0	5.0	0.5	
KTD251B684M55A0T00		0.68						
KTD251B105M55A0T00		1.0						

◆DIMENSIONS (mm)

