



Comparator and Reference Circuits

Preliminary Technical Data

ADCMP350–ADCMP357

FEATURES

Comparators with 0.6V or 1.2V On-Chip References

Output Stages

Open-Drain Active-High (ADCMP350/1)

Push-Pull Active-High (ADCMP352/3)

Open-Drain Active-Low (ADCMP354/5)

Push-Pull Active-Low (ADCMP356/7)

High Voltage (up to 22V) tolerance on V_{IN} and Open-Drain

Output Pins

Low Power Consumption (5 μ A)

10nA Input Bias Current

20mV Hysteresis

Specified Over -40°C to +125°C Temperature Range

4-Lead SC70 Package

APPLICATIONS

Microprocessor Systems

Computers

Controllers

Intelligent Instruments

Portable Equipment

GENERAL DESCRIPTION

The ADCMP350-ADCMP357 are comparator and reference circuits suitable for use in general purpose applications. High performance over the -40°C to +125°C temperature range make them suitable for use in automotive and other thermally harsh applications, while low power consumption and space efficient SC70 packaging make them ideal for battery powered portable equipment

FUNCTIONAL BLOCK DIAGRAMS

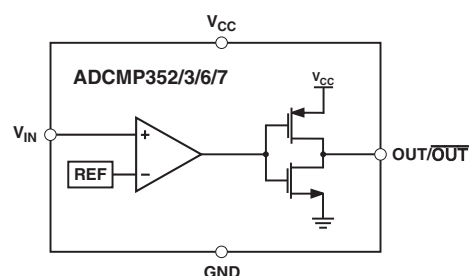
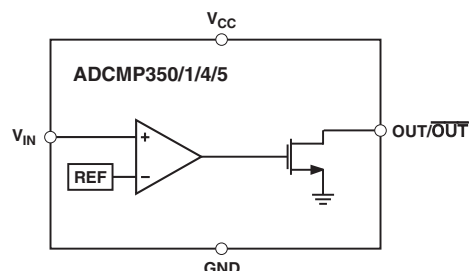


Table 1. Selection Table

Part No.	Reference Voltage (V)	Output Stage	
		OUT	OUT
ADCMP350	0.6	-	Open-Drain
ADCMP351	1.2		Open-Drain
ADCMP352	0.6	Open-Drain	Push-Pull
ADCMP353	1.2		Push-Pull
ADCMP354	0.6	Open-Drain	-
ADCMP355	1.2	Open-Drain	
ADCMP356	0.6	Push-Pull	
ADCMP357	1.2	Push-Pull	

Rev. PrA

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective companies.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 www.analog.com
Fax: 781.326.8703 © 2004 Analog Devices, Inc. All rights reserved.

SPECIFICATIONS

(V_{CC}=Full Operating Range, T_A=-40°C to +125°C, unless otherwise noted.)

Parameter	Min	Typ	Max	Units	Test Conditions/Comments
SUPPLY					
V _{CC} Operating Voltage Range	2.25		3.6	V	
V _{IN} Operating Voltage Range			22	V	
Supply Current		15	20	μA	
INTERNAL REFERENCE					
ADCMP350/2/4/6	0.585	0.6	0.615	V	V _{CC} =3.3V, T _A =-40°C to +85°C
	0.579	0.6	0.621	V	V _{CC} =3.3V, T _A =-40°C to +125°C
ADCMP351/3/5/7	1.17	1.2	1.23	V	V _{CC} =3.3V, T _A =-40°C to +85°C
	1.158	1.2	1.242	V	V _{CC} =3.3V, T _A =-40°C to +125°C
V _{IN} HYSTERESIS		20		mV	
INPUT BIAS CURRENT		10		nA	V _{CC} =3.3V
THRESHOLD TEMPERATURE COEFFICIENT		30		ppm/°C	
V _{IN} TO OUT DELAY		2		μs	V _{IN} =V _{TH} to (V _{IN} -100mV)
OUT/ <u>OUT</u> VOLTAGE LOW			0.3	V	V _{IN} <V _{TH} min, I _{SINK} =1.2mA
OUT/ <u>OUT</u> VOLTAGE HIGH	0.8xV _{CC}			V	V _{IN} >V _{TH} max, I _{SOURCE} =500μA
OUT/ <u>OUT</u> OPEN-DRAIN OUTPUT LEAKAGE CURRENT			1	μA	V _{CC} >V _{TH} , OUT/ <u>OUT</u> =22V

ABSOLUTE MAXIMUM RATINGS

Table 3. T_A = 25°C unless otherwise noted.

Parameter	Rating
V _{CC}	-0.3V to +6V
V _{IN}	-0.3V to +25V
OUT, <u>OUT</u> (Open-Drain)	-0.3V to +25V
OUT, <u>OUT</u> (Push-Pull)	-0.3V to +6V
Operating Temperature Range	-40°C to +125°C
Storage Temperature Range	-65°C to +150°C
θ _{JA} Thermal Impedance, SC70	146°C/W
Lead Temperature	
Soldering (10 sec)	300°C
Vapour Phase (60 sec)	215°C
Infrared (15 sec)	220°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

PIN CONFIGURATION AND FUNCTIONAL DESCRIPTIONS

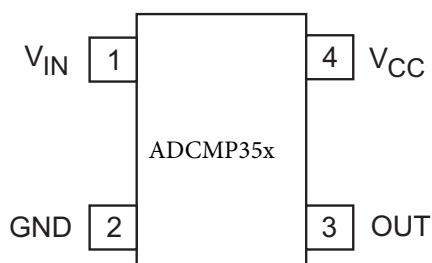


Table 4. Pin Functional Descriptions


Pin No.	Name	Description
1	V_{IN}	Monitors analog input voltage
2	GND	Ground
3	OUT/ $\overline{\text{OUT}}$	Digital output. Active-high or active-low and open-drain or push-pull options depending on model number
4	V_{CC}	Power supply

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



OUTLINE DIMENSIONS

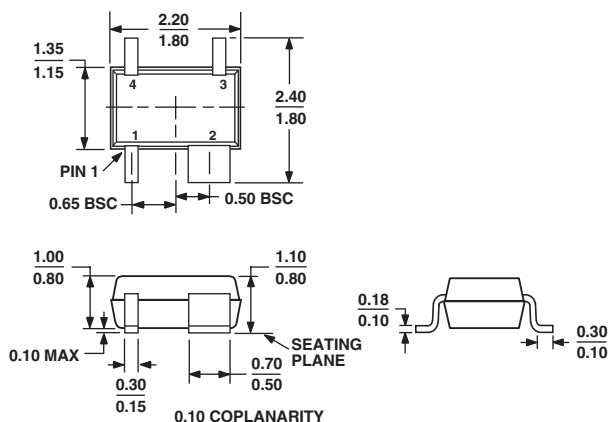

PACKAGE OUTLINE CORRESPONDS IN FULL TO EIAJ SC82
EXCEPT FOR WIDTH OF PIN-2 AS SHOWN

Figure 1. 4-Lead Thin Shrink Small Outline Transistor Package [SC70]

(EIAJ SC82 body)

(KS-4)

Dimensions shown in millimeters

ORDERING GUIDE

Model	Temperature Range	Quantity	Package Type	Branding
ADCMP350AKS-R7	-40°C to +125°C	3k	SC70-4	M0Z
ADCMP350AKS-RL	-40°C to +125°C	10k	SC70-4	M0Z
ADCMP351AKS-R7	-40°C to +125°C	3k	SC70-4	M10
ADCMP351AKS-R7	-40°C to +125°C	10k	SC70-4	M10
ADCMP352AKS-R7	-40°C to +125°C	3k	SC70-4	M11
ADCMP352AKS-R7	-40°C to +125°C	10k	SC70-4	M11
ADCMP353AKS-R7	-40°C to +125°C	3k	SC70-4	M12
ADCMP353AKS-R7	-40°C to +125°C	10k	SC70-4	M12
ADCMP354AKS-R7	-40°C to +125°C	3k	SC70-4	M13
ADCMP354AKS-R7	-40°C to +125°C	10k	SC70-4	M13
ADCMP355AKS-R7	-40°C to +125°C	3k	SC70-4	M14
ADCMP355AKS-R7	-40°C to +125°C	10k	SC70-4	M14
ADCMP356AKS-R7	-40°C to +125°C	3k	SC70-4	M15
ADCMP356AKS-R7	-40°C to +125°C	10k	SC70-4	M15
ADCMP357AKS-R7	-40°C to +125°C	3k	SC70-4	M16
ADCMP357AKS-RL	-40°C to +125°C	10k	SC70-4	M16