


# E32D1 Series



**ECLIPTEK**  
CORPORATION

- RoHS Compliant (Pb-Free)
- PECL Output Oscillators
- 3.3V supply voltage
- Ceramic 6-pad SMD Package
- Stability to  $\pm 25$ ppm
- Tri-State Output
- Complementary Output
- Available on Tape and Reel

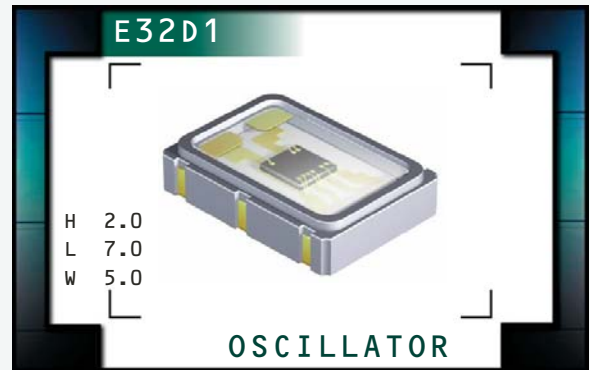

## ELECTRICAL SPECIFICATIONS

<b>Frequency Range</b>	61.440MHz, 76.800MHz, 80.000MHz, 125.000MHz, 128.000MHz, 155.520MHz, 156.250MHz, 161.1328MHz, 167.3315MHz	
<b>Operating Temperature Range</b>	0°C to 70°C -40°C to 85°C	
<b>Storage Temperature Range</b>	-55°C to 125°C	
<b>Supply Voltage (<math>V_{CC}</math>)</b>	3.3V <sub>DC</sub> $\pm 5\%$	
<b>Input Current</b>	With Load	100mA Maximum
<b>Frequency Tolerance / Stability</b>	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, 1st Year Aging, Shock, and Vibration $\pm 50$ ppm or $\pm 25$ ppm Maximum	
<b>Output Voltage Logic High (<math>V_{OH}</math>)</b>	$V_{CC} - 1.025V_{DC}$ Minimum	
<b>Output Voltage Logic Low (<math>V_{OL}</math>)</b>	$V_{CC} - 1.620V_{DC}$ Maximum	
<b>Rise Time / Fall Time</b>	20% to 80% of waveform	1.5 nSeconds Maximum
<b>Duty Cycle</b>	at 50% of waveform	50 $\pm 10$ (%) 50 $\pm 5$ (%)
<b>Load Drive Capability</b>	50 Ohms into $V_{CC} - 2.0V_{DC}$	
<b>Control Voltage (<math>V_C</math>)</b>	Test Conditions for Frequency Deviation	1.65V <sub>DC</sub> $\pm 1.65V_{DC}$
<b>Control Voltage Range (<math>V_{CR}</math>)</b>	0.0V <sub>DC</sub> to $V_{CC} + 0.5V_{DC}$	
<b>Frequency Deviation</b>	Inclusive of Operating Temperature Range, Supply Voltage Change, and Output Load Change	$\pm 75$ ppm Minimum
<b>Linearity</b>	20%, 15%, or 10% Maximum	
<b>Transfer Function</b>	Positive Transfer Characteristic	
<b>Modulation Bandwidth (MBW)</b>	Measured at -3dB with Control Voltage of +1.65V <sub>DC</sub>	10kHz Minimum
<b>Input Impedance (<math>Z_i</math>)</b>	50kOhms Typical	
<b>Typical Phase Noise (<math>F_o = 155.520</math>MHz)</b>	at 10Hz Offset at 100Hz Offset at 1kHz Offset at 10kHz Offset at 100kHz Offset at 1MHz Offset	-55dBc/Hz -90dBc/Hz -120dBc/Hz -140dBc/Hz -145dBc/Hz -148dBc/Hz
<b>Logic Control/Additional Output</b>	Tri-State Enable Low / Complementary Output	
<b>Tri-State Input Voltage</b>	$V_{IH}$ of 70% of $V_{CC}$ Minimum No Connection $V_{IL}$ of 30% of $V_{CC}$ Maximum	Disables Outputs: High Impedance Enables Output Enables Output
<b>RMS Phase Jitter</b>	FJ = 12kHz to 20MHz	0.4pSec Typical, 1pSec Maximum
<b>Accumulated Period Jitter (<math>t_{acc}</math>)</b>	Sigma of Total Jitter Distribution	4pSec Typical, 5pSec Maximum
<b>Period Jitter (<math>t_H</math>)</b>	Sigma of Random Jitter	3pSec Typical, 5pSec Maximum
<b>Period Jitter (<math>t_{rms}</math>)</b>	Sigma of Total Jitter Distribution	3pSec Typical, 5pSec Maximum
<b>Period Jitter (<math>t_{di}</math>)</b>	Deterministic Jitter	4pSec Typical, 10pSec Maximum
<b>Period Jitter (<math>t_{p-p}</math>)</b>	Peak to Peak of Jitter Distribution	27pSec Typical, 40pSec Maximum
<b>Start Up Time</b>	10 mSeconds Maximum	

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES E32D1	PACKAGE CERAMIC	VOLTAGE 3.3V	CLASS OS3Y	REV. DATE 10/07
--------------------------------	------------------------	-----------------	--------------------	-----------------	---------------	--------------------

## PART NUMBERING GUIDE

### E32D1 E E A 2 K - 155.520M TR

**FREQUENCY TOLERANCE & STABILITY/  
OPERATING TEMPERATURE RANGE**

D=±50ppm Maximum over 0°C to +70°C  
 E=±25ppm Maximum over 0°C to +70°C  
 H=±50ppm Maximum over -40°C to +85°C

**FREQUENCY DEVIATION**

E=±75ppm Minimum

**LINEARITY**

A=20% Maximum  
 B=15% Maximum  
 C=10% Maximum

**AVAILABLE OPTIONS**

Blank=Bulk  
 TR=Tape and Reel (Standard)

**FREQUENCY**


**LOGIC CONTROL / ADDITIONAL OUTPUT**

K=Tri-State (Enable Low) / Complementary Output

**DUTY CYCLE**


1=50% ±10%  
 2=50% ±5%

**MECHANICAL DIMENSIONS**  
ALL DIMENSIONS IN MILLIMETERS

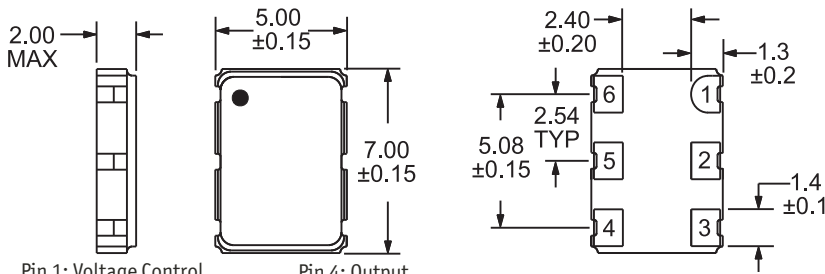


Pin 1: Voltage Control  
 Pin 2: Tri-State  
 Pin 3: Case Ground  
 Pin 4: Output  
 Pin 5: Complementary Output  
 Pin 6: Supply Voltage

**SUGGESTED SOLDER PAD LAYOUT**  
ALL DIMENSIONS IN MILLIMETERS

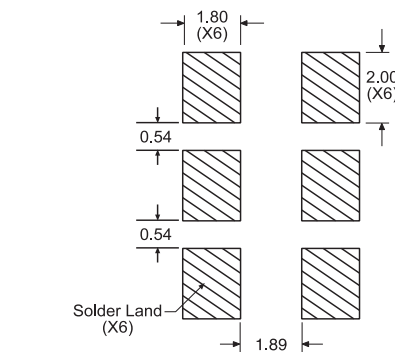


Tolerances=±0.1

**TAPE AND REEL DIMENSIONS**  
ALL DIMENSIONS IN MILLIMETERS

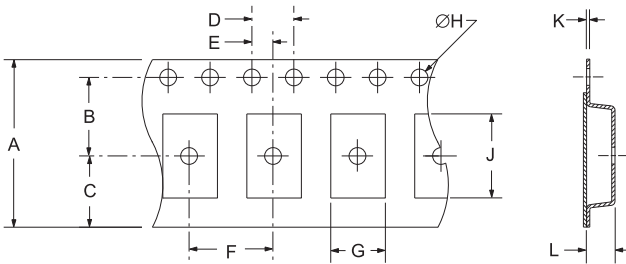

TAPE	A	B	C	D	E
	16±.3-1	7.5±.1	6.75±.1	4 ±.1	2±.1
F	G	H	J	K	L
8±.1	B0*	1.5 +.1-0	A0*	.3±.05	K0*

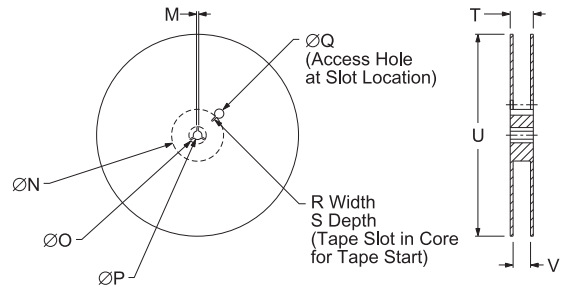

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13±.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	22.4 MAX	360 MAX	16.4+2-0	1,000

\*Compliant to EIA 481A

**ENVIRONMENTAL/MECHANICAL SPECIFICATIONS**

Characteristic	Specification
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Vibration	MIL-STD-883, Method 2007, Condition A
Solderability	MIL-STD-883, Method 2002
Temperature Cycling	MIL-STD-883, Method 1010
Resistance to Soldering Heat	MIL-STD-202, Method 210
Resistance to Solvents	MIL-STD-202, Method 215

**MARKING SPECIFICATIONS**

Line 1: ECLIPTEK  
 Line 2: XX.XXX M  
 Frequency in MHz (5 Digits Maximum + Decimal)  
 Line 3: XX Y ZZ  
 Week of Year  
 Last Digit of Year  
 Eclipsetek Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	E32D1	CERAMIC	3.3V	OS3Y	10/07