

# E-Rated Fuses Medium Voltage

## Medium Voltage.

### For Potential & Small Power Transformers

JCD, JCW, JCE  
JCQ, JCI, & JCT



- Low amperage, E-Rated medium voltage fuses are general purpose current limiting fuses.
- The E rating defines the melting-time-current characteristic of the fuse and permits electrical interchangeability of fuses with the same E Rating.
- For a general purpose fuse to have an E Rating the following condition must be met:  
The current responsive element shall melt in 300 seconds at a rms current within the range of 200% to 240% of the continuous current rating of the fuse, fuse refill, or link. (For fuses rated 100E or less)(ANSI C37.46).
- Bussmann low amperage, E-Rated fuses are designed to provide primary protection for potential, small service, and control transformers.
- These fuses offer a high level of fault current interruption in a self-contained non-venting package which can be mounted indoors or in an enclosure.


CATALOG SYMBOL: JCD, JCW, JCE, JCQ, JCI, AND JCT  
E-RATED  
CURRENT LIMITING  
INDICATING/NON-INDICATING  
PLATED FERRULES  
VOLTAGE RATINGS (Max. Design): 2475, 2750, 5500, 8300,  
15,500 VOLT  
CURRENT RATINGS: 1/4E THRU 10E  
NO AGENCY LISTINGS

# E-Rated Fuses

## For Potential & Small Power Trans. Medium Voltage

# JCD, JCW, JCE JCQ, JCI, & JCT

### Dimensional Data

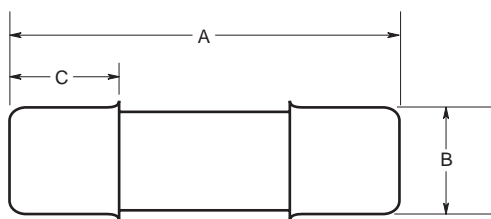

### Specifications

Buss Catalog No.	Amperage	Maximum Design Voltage	Dimensions (Inches)			Construction	Maximum Interrupting Capacity	
			A	B	C		Amps (Asym.)	Amps (Sym.)
<b>2475V; E-Rated Fuse; Non-Indicating</b>								
JCD-1/4E	.25E	2475V	4.5	0.75	0.63	Single	100,000	63,000
JCD-1/2E	.50E	2475V	4.5	0.75	0.63	Single	100,000	63,000
JCD-1E	1.0E	2475V	4.5	0.75	0.63	Single	60,000	40,000
JCD-2E	2.0E	2475V	4.5	0.75	0.63	Single	60,000	40,000
JCD-5E	5.0E	2475V	4.5	0.75	0.63	Single	40,000	25,000
<b>2450/5500V; E-Rated Fuse; Non-Indicating</b>								
JCW-1/2E	.5E	2750V/5500V	7.31	1.56	1.38	Single	60,000	40,000
JCW-1E	1E	2750V/5500V	7.31	1.56	1.38	Single	60,000	40,000
JCW-2E	2E	2750V/5500V	7.31	1.56	1.38	Single	60,000	40,000
JCW-3E	3E	2750V/5500V	7.31	1.56	1.38	Single	60,000	40,000
JCW-4E	4E	2750V/5500V	7.31	1.56	1.38	Single	60,000	40,000
JCW-5E	5E	2750V/5500V	7.31	1.56	1.38	Single	60,000	40,000
<b>5500V; E-Rated Fuse; Non-Indicating</b>								
JCE-1/4E	.25E	5500V	5.63	0.75	0.63	Single	100,000	63,000
JCE-1/2E	.50E	5500V	5.63	0.75	0.63	Single	100,000	63,000
JCE-2E	2.0E	5500V	5.63	0.75	0.63	Single	60,000	40,000
JCE-4E	4.0E	5500V	5.63	0.75	0.63	Single	60,000	40,000
<b>5500V; E-Rated Fuse; Indicating</b>								
JCQ-1/2E	.5E	5500V	9.5	1.56	1.125	Single	130,000	80,000
JCQ-1E	1.0E	5500V	9.5	1.56	1.125	Single	130,000	80,000
JCQ-1-1/2E	1.5E	5500V	9.5	1.56	1.125	Single	130,000	80,000
JCQ-3E	3.0E	5500V	12.88	1.56	1.125	Single	130,000	80,000
JCQ-5E	5.0E	5500V	12.88	1.56	1.125	Single	130,000	80,000
JCQ-10E	10.0E	5500V	12.88	1.56	1.125	Single	130,000	80,000
<b>8300V; E-Rated Fuse; Indicating</b>								
JCI-1/2E	.50E	8300V	9.5	1.56	1.125	Single	130,000	80,000
JCI-3E	3.0E	8300V	12.88	1.56	1.125	Single	130,000	80,000
JCI-5E	5.0E	8300V	12.88	1.56	1.125	Single	80,000	50,000
JCI-10E	10.0E	8300V	12.88	1.56	1.125	Single	80,000	50,000
<b>15,500V; E-Rated Fuse; Indicating</b>								
JCT-1/2E	.5E	15500V	12.94	1.56	1.125	Single	130,000	80,000
JCT-1E	1.0E	15500V	12.94	1.56	1.125	Single	130,000	80,000
JCT-1-1/2E	1.5E	15500V	12.94	1.56	1.125	Single	130,000	80,000
JCT-3E	3.0E	15500V	17.5	1.56	1.125	Single	130,000	80,000
JCT-5E	5.0E	15500V	17.5	1.56	1.125	Single	130,000	80,000
JCT-10E	10.0E	15500V	17.5	1.56	1.125	Single	80,000	50,000

Fuse clip for 1.56" Diameter Fuses - 1A0835

Fuse clip for 0.75" Diameter Fuses - 1A1837

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.