STANLEY

DN304

T-041-13

STANLEY INFRARED LED

■ Package Dimensions (Unit : mm±0.2)

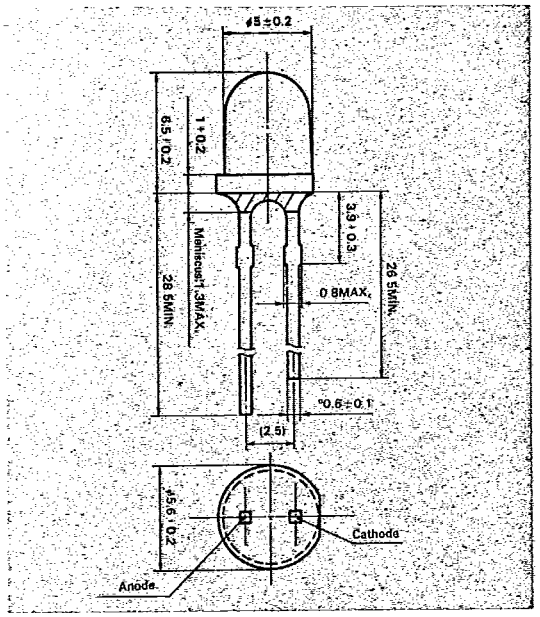

■ FEATURES

(1) Ultra-high radiant power GaAlAs type (Po=15mW TYP.)
(2) 850nm peak wavelength
(3) Utra-highspeed response
(4) Wide directivity (△θ=35deg.)

■ APPLICATIONS

(1) Long distance wireless remote control
(2) High-speed photosensors and phototoswitches
(3) High-speed rotary encoders
(4) Optical data transmission

■ Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Maximum Ratings	Unit
Power Dissipation	Pd	150	mW
Forward Current	I_F	100	mA
Peak Forward Current*	I_{FM}	1000	mA
Reverse Voltage	V_R	5	V
Operating Temperature	Topr	−30 ~ + 85	℃
Storage Temperature	Tstg	−30 ~ +100	℃

* I_{FM} Condition: tw ≤ 100μs, Duty ≤ 1/100

■ Electro-Optical Characteristics (Ta = 25°C)

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward Voltage	V_F	—	1.55	2	V	I_F=50mA
Reverse Current	I_R	—	—	100	μA	V_R=5V
Junction Capacitance	C_O	—	65	—	pF	V=0V、f=1MHz
Radiant Intensity	I_E	15	30	—	mW sr	I_F=50mA
Peak Spectral Wave Length	λp	—	850	—	nm	I_F=50mA
Spectral Band width	Δλ	—	40	—	nm	I_F=50mA
Half-Intensity Directional Angle	Δθ	—	35	—	deg.	I_F=50mA

■ Peak Forward Current Vs. Duty Ratio

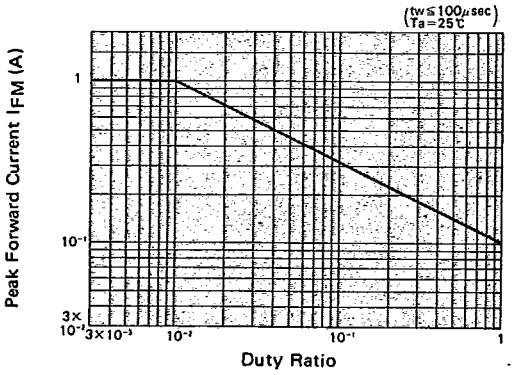

■ Max. Forward Current Vs. Ambient Temp.

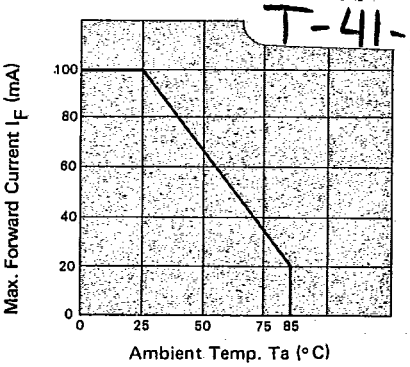

■ Forward Voltage Vs. Ambient Temp.

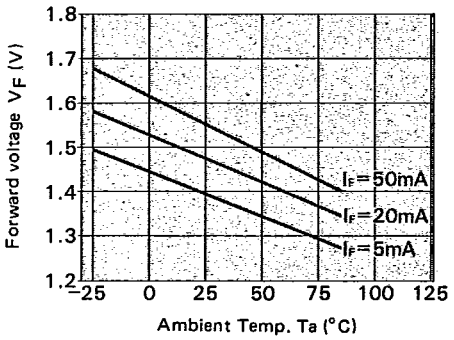

■ Directivity Characteristics

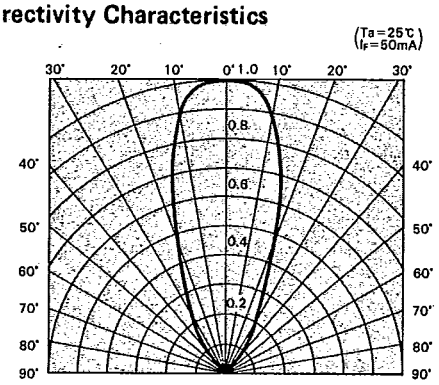

■ Peak Forward Current Vs. Peak Forward Voltage

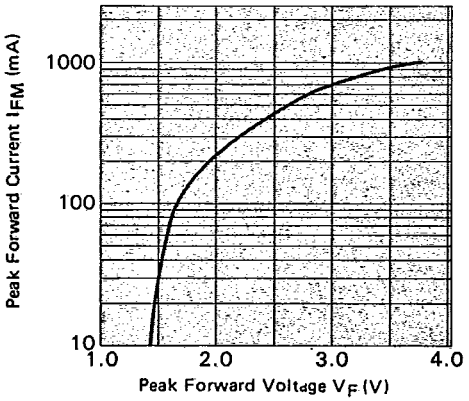

■ Spectral Distribution

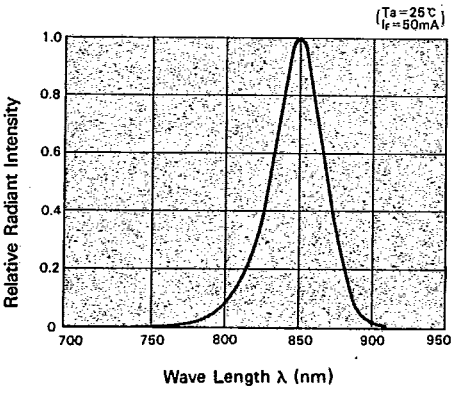

■ Forward Current Vs. Forward Voltage

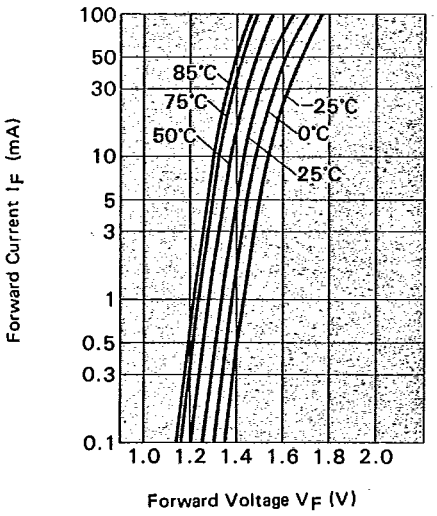

■ Relative Radiant Power Vs. Forward Current

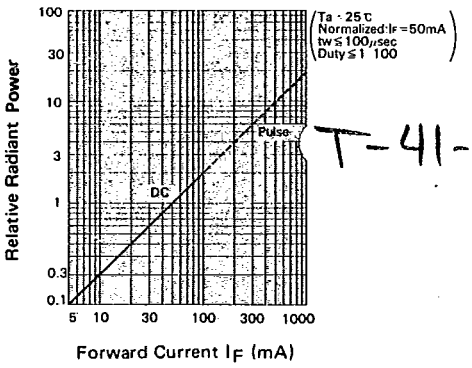

T-41-13

■ Relative Radiant Power Vs. Ambient Temp.

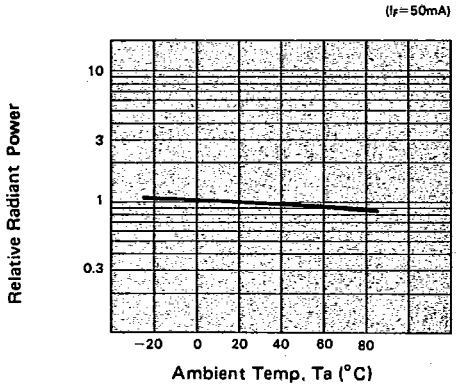

■ Relative Radiant Intensity Vs. Distance