

Female PC Quick-Fit Terminals

Material: Brass, nickel plate.



Vertical Terminals

| Stock No. | Mfr.'s Type | Accepts Tab (In.) | PER PK./100 |
|-----------|-------------|-------------------|-------------|
| 839-3255 | 3534 | 0.110 x 0.020 | 9.96 |
| 839-3257 | 3548 | 0.187 x 0.020 | 22.70 |
| 839-3522 | 3522 | 0.295 x 0.032 | 8.77 |
| 839-3260 | 3528 | 0.250 x 0.032 | 10.23 |


Male PC Quick-Fit Terminals



Underwriters Laboratories, Inc. component program assures that "Quick-Fit" terminals meet the dimensional and performance requirements of the National Electric Manufacturers Association Specification number NEMA 2-1982 (1988) and UL310. Material: Brass, tin plate.

| Stock No. | Mfr.'s Type | Fig. | Terminal Size (In.) | PER PK./100 |
|-----------|-------------|------|-----------------------|-------------|
| 839-1267 | 1267 | 1 | 0.110 x 0.020 | 6.20 |
| 839-1211 | 1211 | 1 | 0.110 x 0.032 | 8.48 |
| 839-2402 | 1285 | 2 | 0.187 x 0.020 | 4.80 |
| 839-1212 | 1212 | 2 | 0.187 x 0.032 | 6.06 |
| 839-2403 | 1286 | 2 | 0.205 x 0.020 | 6.38 |
| 839-1213 | 1213 | 2 | 0.205 x 0.032 | 5.90 |
| 839-2404 | 1287 | 3 | 0.250 x 0.032 x 0.400 | 6.98 |
| 839-1289 | 1289 | 3 | 0.250 x 0.032 x 0.631 | 7.10 |
| 839-3289 | 4903 | 4 | 0.110 x 0.020 | 12.70 |

Male Quick-Fit Terminals — Rivet Mount

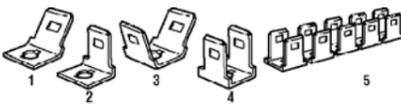

Material: Brass, bright finish.

45° and 90° Single Terminals

| Stock No. | Mfr.'s Type | Fig. | Degree | Terminal Size (In.) | No. of Pairs | PER PK./100 |
|-----------|-------------|------|--------|---------------------|--------------|-------------|
| 839-3297 | 1280 | 1 | 45° | 0.250 x 0.032 | — | 5.79 |
| 839-3300 | 1256 | 2 | 90° | 0.250 x 0.032 | — | 5.79 |


45° and 90° Dual Terminals — Brass, Bright Finish

| | | | | | | |
|----------|------|---|-----|---------------|---|-------|
| 839-3301 | 2005 | 3 | 45° | 0.110 x 0.020 | — | 10.60 |
| 839-3303 | 1258 | 3 | 45° | 0.250 x 0.032 | — | 6.80 |
| 839-3306 | 1257 | 4 | 90° | 0.250 x 0.032 | — | 5.80 |

Multiple 0.250" x 0.032" Terminals


| | | | | | | |
|----------|------|---|---|---------------|---|-------|
| 839-3310 | 1008 | 5 | — | 0.250 x 0.032 | 5 | 34.70 |
|----------|------|---|---|---------------|---|-------|

PC Test Point Terminals

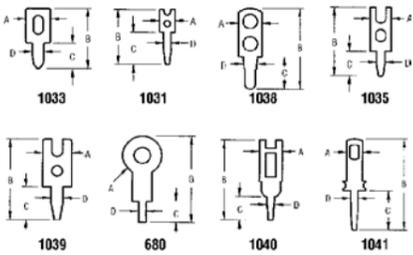

| Stock No. | Mfr.'s Type | Material | Dim. (In.) | | | | PER PK./100 |
|-----------|-------------|------------------------|------------|------|------|------|-------------|
| | | | A | B | C | D | |
| 839-9001 | 1033 | .025" Brass, Tin Plate | .118 | .296 | .125 | .054 | 7.29 |
| 839-1031 | 1031 | .020" Brass, Tin Plate | .075 | .270 | .156 | .035 | 7.60 |
| 839-9015 | 1038 | .020" Brass, Tin Plate | .110 | .395 | .156 | .069 | 7.40 |
| 839-1035 | 1035 | .020" Brass, Tin Plate | .100 | .335 | .117 | .039 | 6.10 |
| 839-1039 | 1039 | .025" Brass, Tin Plate | .138 | .394 | .160 | .055 | 6.45 |
| 839-0680 | 680 | .015" Brass, Tin Plate | .312 | .718 | .172 | .062 | 9.77 |
| 839-1040 | 1040 | .025" Brass, Tin Plate | .110 | .390 | .115 | .039 | 5.84 |
| 839-1041 | 1041 | .032" Brass, Tin Plate | .110 | .630 | .275 | .055 | 9.21 |

PC Test Points Snap-In Mounting Color Coded

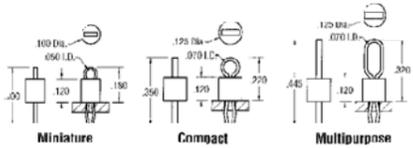

Miniature

Material: Brass wire, tin plate. Base: Glass filled nylon, UL 94 V-0.

| | | | | |
|----------|------|-------------------|-------------|-------|
| 839-3600 | 5000 | Red Base Color | PER PK./100 | 16.30 |
| 839-3601 | 5001 | Black Base Color | PER PK./100 | 17.62 |
| 839-3602 | 5002 | White Base Color | PER PK./100 | 17.62 |
| 839-3603 | 5003 | Orange Base Color | PER PK./100 | 16.30 |
| 839-3604 | 5004 | Yellow Base Color | PER PK./100 | 17.62 |

Compact

Material: Brass wire, tin plate. Base: Valox, UL 94 V-0.


| | | | | |
|----------|------|-------------------|-------------|-------|
| 839-3605 | 5005 | Red Base Color | PER PK./100 | 18.72 |
| 839-3606 | 5006 | Black Base Color | PER PK./100 | 16.85 |
| 839-3607 | 5007 | White Base Color | PER PK./100 | 16.85 |
| 839-3608 | 5008 | Orange Base Color | PER PK./100 | 18.21 |
| 839-3609 | 5009 | Yellow Base Color | PER PK./100 | 18.21 |

Multipurpose

Material: Phos. br., tin plate. Base: Valox, UL 94 V-0.


| | | | | |
|----------|------|-------------------|-------------|-------|
| 839-3610 | 5010 | Red Base Color | PER PK./100 | 18.21 |
| 839-3611 | 5011 | Black Base Color | PER PK./100 | 17.09 |
| 839-3612 | 5012 | White Base Color | PER PK./100 | 18.71 |
| 839-3613 | 5013 | Orange Base Color | PER PK./100 | 18.21 |
| 839-3614 | 5014 | Yellow Base Color | PER PK./100 | 16.85 |

Lockwasher and Solder Terminals

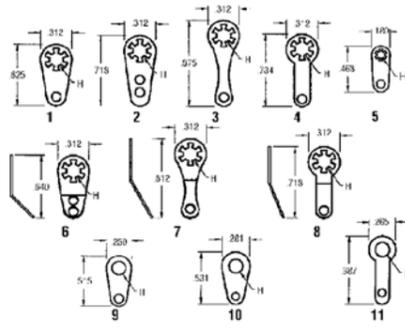

| Stock No. | Mfr.'s Type | Fig. | Material | Dim. (In.) | | PER PK./100 |
|-----------|-------------|------|------------------------|------------|---|-------------|
| | | | | H | H | |
| 839-2380 | 908 | 1 | .018" Brass, Tin Plate | 0.120 (#4) | — | 8.37 |
| 839-2381 | 914 | 1 | .018" Brass, Tin Plate | 0.140 (#6) | — | 6.70 |
| 839-2382 | 915 | 1 | .018" Brass, Tin Plate | 0.171 (#8) | — | 6.70 |
| 839-2383 | 910 | 2 | .018" Brass, Tin Plate | 0.120 (#4) | — | 8.34 |
| 839-2384 | 918 | 2 | .018" Brass, Tin Plate | 0.140 (#6) | — | 6.90 |
| 839-2389 | 903 | 3 | .018" Brass, Tin Plate | 0.120 (#4) | — | 8.88 |
| 839-2390 | 904 | 3 | .018" Brass, Tin Plate | 0.140 (#6) | — | 7.20 |
| 839-2391 | 905 | 4 | .018" Brass, Tin Plate | 0.171 (#8) | — | 8.66 |
| 839-2386 | 909 | 4 | .018" Brass, Tin Plate | 0.120 (#4) | — | 7.30 |
| 839-2387 | 916 | 4 | .018" Brass, Tin Plate | 0.140 (#6) | — | 8.75 |
| 839-2401 | 907 | 5 | .013" Brass, Tin Plate | — | — | 13.77 |
| 839-2392 | 7311 | 6 | .018" Brass, Tin Plate | 0.120 (#4) | — | 8.34 |
| 839-2393 | 7312 | 6 | .018" Brass, Tin Plate | 0.140 (#6) | — | 8.55 |
| 839-2394 | 7313 | 6 | .018" Brass, Tin Plate | 0.171 (#8) | — | 6.90 |
| 839-2398 | 7317 | 7 | .018" Brass, Tin Plate | 0.120 (#4) | — | 7.20 |
| 839-2400 | 7319 | 7 | .018" Brass, Tin Plate | 0.171 (#8) | — | 8.66 |
| 839-2395 | 7314 | 8 | .018" Brass, Tin Plate | 0.120 (#4) | — | 8.97 |
| 839-2396 | 7315 | 8 | .018" Brass, Tin Plate | 0.140 (#6) | — | 8.97 |
| 839-9990 | 4004 | 9 | .016" Brass, Tin Plate | — | — | 5.90 |
| 839-4005 | 7328 | 10 | .015" Brass, Tin Plate | 0.120 (#4) | — | 7.10 |
| 839-4006 | 7329 | 10 | .015" Brass, Tin Plate | 0.140 (#6) | — | 8.56 |
| 839-4011 | 7325 | 11 | .020" Brass, Tin Plate | 0.120 (#4) | — | 6.60 |
| 839-4012 | 7326 | 11 | .020" Brass, Tin Plate | 0.140 (#6) | — | 6.60 |

Vertical P. C. Test Jack

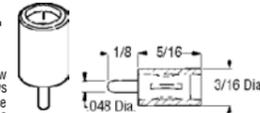


Accepts .80" Tip. This low profile vertical jack allows dense packing where space is limited. Mounts into a .052" diameter hole. Provides easy access and positive electrical contact. The contact is recessed to prevent accidental shorting. Capacitance between two adjacent jacks less than 1.0 pF at 1 MHz. Operating Voltage: 1500 volts RMS. Current Rating: 5 amps max. Material Specifications: Body: Nylon per ASTM D4066. Contact: Beryllium copper silver plated.

| | | | | |
|----------|------|--------|------|-----|
| 839-6036 | 6036 | White | EACH | .64 |
| 839-6037 | 6037 | Red | EACH | .64 |
| 839-6038 | 6038 | Black | EACH | .64 |
| 839-6039 | 6039 | Yellow | EACH | .64 |
| 839-6041 | 6041 | Blue | EACH | .64 |

Hex Male/Female Threaded Standoffs

► English and Metric ► Nylon, Stainless, Brass and Aluminum

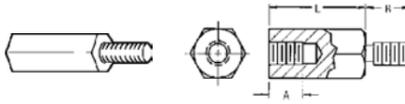

4-40 Threaded Standoffs — .250" Hex


| Dimensions (In.) | | Nylon 6/6 | | | Stainless Steel | | Brass Nickel Plate | | Aluminum Clear Iridite | | | | |
|------------------|-----------|-----------|-------------|-------------|-----------------|-------------|--------------------|-------------|------------------------|-------------|----------|------|-------|
| L | A B | Stock No. | Mfr.'s Type | PER PK./100 | Stock No. | Mfr.'s Type | Stock No. | Mfr.'s Type | Stock No. | Mfr.'s Type | | | |
| 0.250 | .140 .187 | 839-4800 | 4800 | 23.13 | 839-8712 | 8712 | 1.27 | 839-8713 | 8713 | 25.99 | 839-8714 | 8714 | 19.54 |
| 0.375 | .250 .187 | 839-4801 | 4801 | 23.58 | 839-7001 | 2087 | 1.33 | 839-2332 | 7200 | 25.64 | 839-8001 | 8400 | 22.12 |
| 0.500 | .375 .187 | 839-4802 | 4802 | 24.49 | 839-7002 | 2088 | 1.39 | 839-2333 | 1944 | 32.45 | 839-8002 | 8401 | 31.18 |
| 0.625 | .375 .187 | 839-4803 | 4803 | 25.00 | 839-7003 | 2089 | 1.44 | 839-2334 | 1945 | 34.28 | 839-8003 | 8402 | 34.16 |
| 0.750 | .375 .187 | 839-4804 | 4804 | 25.45 | — | — | — | 839-2335 | 1946 | 39.20 | 839-8004 | 8403 | 34.42 |
| 0.875 | .375 .187 | 839-4805 | 4805 | 25.96 | — | — | — | 839-2336 | 7201 | 42.68 | 839-8005 | 8404 | 36.35 |
| 1.000 | .375 .187 | 839-4806 | 4806 | 26.41 | 839-7006 | 2092 | 1.69 | 839-2337 | 1947 | 47.16 | 839-8006 | 8405 | 39.78 |
| 1.250 | .375 .187 | — | — | — | — | — | — | 839-2339 | 1948 | 68.45 | 839-8008 | 8407 | 47.60 |
| 1.500 | .375 .187 | — | — | — | — | — | — | 839-2341 | 1950 | 73.35 | 839-8010 | 8409 | 57.80 |

6-32 Threaded Standoffs — .250 Hex

| | | | | | | | | | | | | | |
|-------|-----------|----------|------|-------|----------|------|------|----------|------|-------|----------|------|-------|
| 0.250 | .140 .250 | 839-4814 | 4814 | 25.19 | 839-8715 | 8715 | 1.02 | 839-8716 | 8716 | 22.74 | 839-8717 | 8717 | 23.49 |
| 0.375 | .250 .250 | 839-4815 | 4815 | 24.04 | 839-6001 | 2119 | 1.03 | 839-2345 | 7210 | 24.92 | 839-8413 | 8413 | 23.03 |
| 0.500 | .375 .250 | 839-4816 | 4816 | 25.85 | 839-6002 | 2120 | 1.11 | 839-2346 | 1952 | 28.00 | 839-8414 | 8414 | 23.23 |
| 0.625 | .375 .250 | 839-4817 | 4817 | 28.19 | 839-6003 | 2121 | 1.17 | 839-2347 | 1953 | 35.50 | 839-8415 | 8415 | 29.00 |
| 0.750 | .375 .250 | 839-4818 | 4818 | 28.68 | 839-6004 | 2122 | 1.35 | 839-2348 | 1954 | 37.40 | 839-8416 | 8416 | 30.22 |
| 1.000 | .375 .250 | 839-4820 | 4820 | 27.33 | 839-6006 | 2124 | 1.40 | 839-2350 | 1644 | 44.20 | 839-8418 | 8418 | 33.59 |
| 1.250 | .375 .250 | 839-4822 | 4822 | 26.87 | 839-6008 | 2126 | 1.90 | 839-2352 | 1955 | 55.70 | 839-8420 | 8420 | 36.80 |
| 1.750 | .375 .250 | 839-4826 | 4826 | 28.55 | 839-6012 | 2130 | 1.79 | 839-2356 | 7215 | 82.65 | 839-8424 | 8424 | 49.71 |
| 2.000 | .375 .250 | 839-4827 | 4827 | 29.00 | 839-6013 | 2131 | 1.87 | 839-2357 | 1646 | 83.25 | 839-8425 | 8425 | 52.10 |

14 Male Sturdi-Mount PC Quick-Fit Terminals

Underwriters Laboratories, Inc. component program assures that "Quick-Fit" terminals meet the dimensional and performance requirements of the National Electric Manufacturers Association Specification number NEMA 2-1982 (1988) and UL310. Material: Brass, tin plate.



| Stock No. | Mfr.'s Type | Terminal Size (In.) | Height (In.) | PER PK./100 |
|-----------|-------------|---------------------|--------------|-------------|
| 839-3287 | 4901 | 0.250 x 0.032 | 0.537 | 9.48 |
| 839-3288 | 4902 | 0.250 x 0.032 | 0.438 | 9.73 |

Male Sturdi-Mount PC Quick-Fit Headers

Terminals: Brass or steel, tin plate. Insulator: Noryl, UL 94V-0.



Vertical .250" x .032" Headers

| Stock No. | Mfr.'s Type | No. of Tabs | EACH |
|-----------|-------------|-------------|------|
| 839-3277 | 7813 | 3 | 1.13 |
| 839-3278 | 7814 | 4 | 1.26 |
| 839-3280 | 7816 | 6 | 1.67 |