
Series KRPA General Purpose Relays







 Multi-Contact Arrangement
Octal Plug Termination
Clear Dust Cover ► Hold-Down Spring for KRPA and KRPA-N Will Accommodate Machine Screws or Rivets; for Use with Flush Mount Chassis Sockets

KRPA11


U.L. Contact Ratings for KRPA


Material	Silver	Silver-Cadmium Oxide G		
Code	Υ			
Models	SPDT, DPDT and 3PDT	SPDT, DPDT	3PDT	
Ratings	5 amps @ 120 VAC 1/10 HP @ 120 VAC 3 amps @ 240 VAC 1/6 HP @ 240 VAC	10 amps @ 250 VAC 1/3 HP @ 250 VAC 1/6 HP @ 120 VAC	10 amps @ 120 VAC 1/6 HP @ 120 VAC 6 amps @ 250 VAC 1/3 HP @ 250 VAC	

Ruggedly constructed relay offered with silver contacts, code "Y", rated 5 amps; and silver-cadmium oxide contacts, code "G" rated 10 amps. Contact arrangements are available up through 3 form (3PDT). Expected life exceeds 100,000 operations at rated load. Mechanical life is 10 million operations, minimum. Enclosed in a clear dust cover. U.L. recognized under file E22575. Low cost version of the KRP relay.

KRPA-N Series has an indicator lamp wired in parallel with its coil, making this model ideal for voltage or current monitoring applications. Silver-cadmium oxide contacts are rated 10 amps. KRPA-N specifications are identical to those of other models in the KRPA series.

Stock	Mfr.'s	EACH			
No.	Туре	1-24	25-49	50-99	
886-0606	KRPA-5AG-120	20.27	18.40	16.71	
886-0615	KRPA-11AY-6	17.77	16.90	15.99	
886-0616	KRPA-11AY-12	22.15	20.13	18.27	
886-0617	KRPA-11AY-24	21.11	20.07	18.80	
886-0618 886-0620	KRPA-11AY-120 KRPA-11AG-6	19.19 22.67	17.46 20.60	15.85 18.70	
886-0621	KRPA-11AG-12	22.67	20.60	18.70	
886-0622	KRPA-11AG-24	19.08	17.34	15.74	
886-0623	KRPA-11AG-120	16.99	15.46	14.03	
886-0626	KRPA-11DY-12	19.84	18.87	17.87	
886-0627	KRPA-11DY-24	19.86	18.88	17.86	
886-0631	KRPA-11DG-12	19.64	17.85	16.20	
886-0632	KRPA-11DG-24	19.64	17.84	16.21	
886-0634	KRPA-11DG-110	21.10	19.18	17.58	
886-0637 886-0638	KRPA-14AY-24 KRPA-14AY-120	19.65 27.11	17.87 24.65	16.22 22.38	
886-0641	KRPA-14AY-12U KRPA-14AG-12	21.75	24.05 20.66	19.5	
886-0642	KRPA-14AG-24	27.89	25.35	23.0	
886-0643	KRPA-14AG-120	24.17	21.97	19.94	
886-0647	KRPA-14DY-24	21.10	20.07	19.02	
886-0651	KRPA-14DG-12	27.69	25.17	22.8	
886-0652	KRPA-14DG-24	27.41	24.92	22.80	
886-0654	KRPA-14DG-110	24.08	22.86	21.67	
886-0656	KRPA-11AN-12	20.17	19.16	18.15	
886-0657 886-0658	KRPA-11AN-24 KRPA-11AN-120	24.26 22.13	23.04 20.11	21.83 18.45	
886-0661	KRPA-11AN-120 KRPA-11DN-12	24.33	20.11	21.69	
886-0662	KRPA-11DN-12 KRPA-11DN-24	22.01	20.01	18.3	
886-0663	KRPA-11DN-110	22.25	21.14	20.03	
886-0667	KRPA-14AN-120	26.98	24.53	22.48	

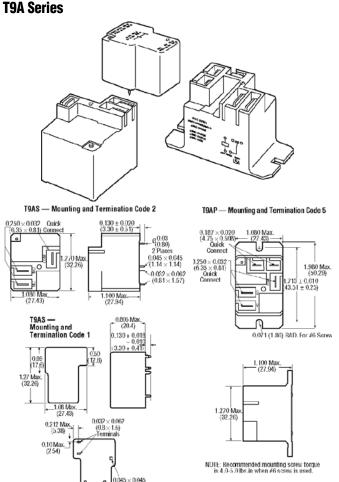



T9A Series are low cost, printed circuit board or panel mount relays. Up to 30 A switching in SPST and 20 A in SPDT arrangements. Silver-cadmium oxide contacts in 1 Form A (SPST-NO) and 1 Form C (SPDT). Available in unsealed, plastic dust cover (T9AP) or immersion cleanable, sealed plastic case (T9AS). UL Class F insulation system standard. Well suited for various industrial, commercial and residential applications.

Stock	Mfr.'s Type	Volts (DC)	Termination	Contacts	EACH		
No.					1-24	25-49	50-Up
886-2101 886-2102 886-2103	T9AS1D12-12 T9AS5D12-12 T9AS1D12-24	12 12 24	P.C. Mount P.C. Mount P.C. Mount	SPST-NO SPDT SPST-NO	3.10 2.66 3.10	2.74 2.29 2.74	2.48 2.09 2.48
886-2104 886-2106 886-2107 886-2108	T9AS5D12-24 T9AS1D12-18 T9AP5D52-12 T9AP5D52-24	24 18 12 24	P.C. Mount P.C. Mount Flange Mount, Q.C. Flange Mount, Q.C.	SPDT SPST-NO SPDT SPDT	2.70 2.70 3.82 3.81	2.38 2.38 3.37 3.38	2.19 2.19 3.06 3.06
886-2109 886-2110 886-2111 886-2112	T9AS1D22-12 T9AS1D22-24 T9AS5D22-12 T9AS5D22-24	12 24 12 24	P.C. Mount, Q.C. P.C. Mount, Q.C. P.C. Mount, Q.C. P.C. Mount, Q.C. P.C. Mount, Q.C.	SPST-NO SPST-NO SPDT SPDT	3.35 2.95 2.95 2.95	2.97 2.66 2.66 2.61	2.69 2.43 2.43 2.36