
CUSTOMER DRAWING

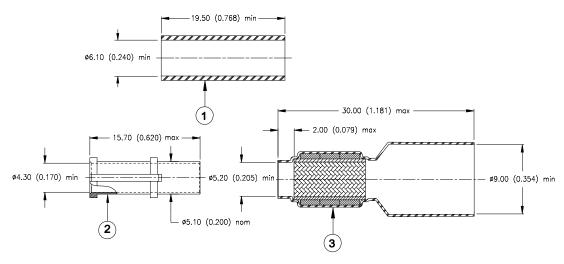


MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
- 3. SOLDERSHIELD DEVICE:
 - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
 - Copper braid pre-tinned with Sn96Ag4 solder alloy with activated rosin flux.
 - Solder Preform: Sn96Ag4 solder alloy, with activated rosin flux.

APPLICATION

- 1. These parts are used on Tyco Electronics/Raychem Hexashield adaptors.
- 2. Cable Type: Single or multi-conductors shielded cable: Raychem Spec 44 or Spec 55, single braid. (tin, silver or nickel-plated copper braid)
- 3. Temperature range: -65° C to $+175^{\circ}$ C.
- 4. For all other application, contact Tyco Electronics/Raychem technical service.

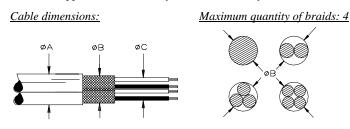

Cable Dimensions							
øΑ		øB		øС			
Min.	Max.	Min.	Max.	Max.			
4.30	8.90	3.50	6.20	4.20			
(0.169)	(0.350)	(0.138)	(0.244)	(0.165)			

PART NUMBERING

HET-A-04X → Ferrule Plating:

B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test.

C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

INSTALLATION

See Tyco Electronics/Raychem installation procedure RPIP-696-00.

Tyco Electronics			Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.	TITLE: FERRULE AND SOLDERSHIELD DEVICE FOR HEXASHIELD ADAPTERS		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]		Raychem	DOCUMENT NO.: HET-A-04X			
TOLERANCES:	ANGLES: N/A	Tyco Electronics reserves the right to				
0.00 N/A			ng at any time. Users	REV:	DATE:	
0.0 N/A	ROUGHNESS		ne suitability of the	Α	11-May-07	
0 N/A	IN MICRON	product for their application.		7.1	11 Way 07	
DRAWN BY:	CAGE CODE:	REPLACES:	ECO NUMBER:	SCALE:	SIZE:	SHEET:
K.YEE	06090	D030535	07-010934	NTS	A	1 of 1