THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – ,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
—	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECO–12–013449	23JUL12	KH	DR

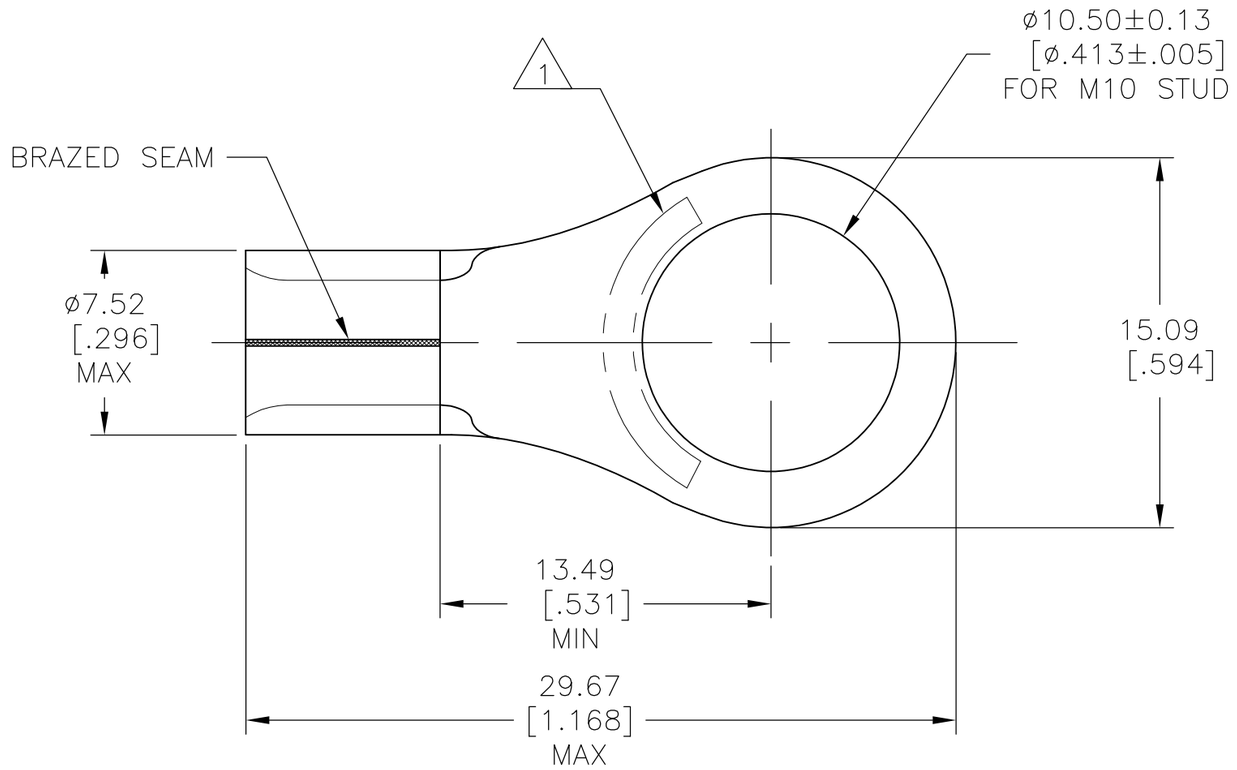

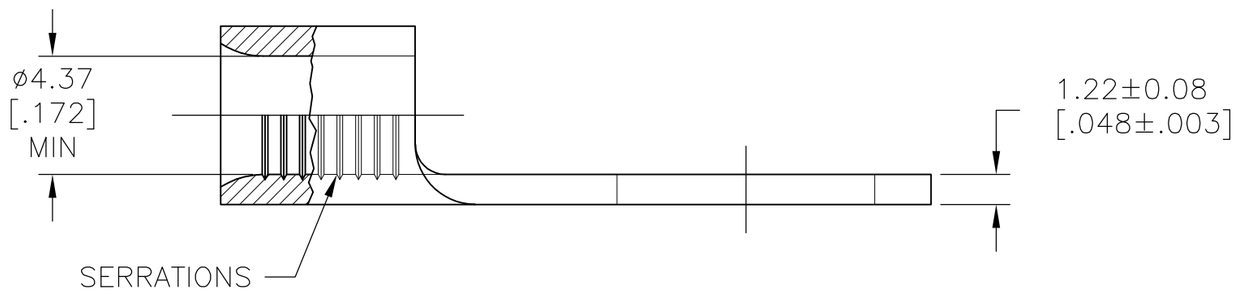

AMP
WIRE RANGE
8 AWG SOLID OR STRANDED

1. STAMP "AMP 8*, APPROX AS SHOWN
2. MATERIAL: COPPER PER ASTM B–152 ANNEALED
3. FINISH: NICKEL PLATE 0.0003 [.0076] MIN EXT THK PER SAE AMS QQ–N–290

QTY	PACKAGE TYPE	PART NO.
500	LOOSE PIECE	134962–1

CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1–800–522–6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1–800–722–1111
FOR ORDER ENTRY	1–800–526–5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 343°C[650°F] MAX

VOLTAGE RATING: N/A

CIRCULAR MIL AREA: 6.64–10.5mm² [13,100–20,800] SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± 0.20 [.008]
4 PLC	± –
ANGLES	± –

MATERIAL 2

FINISH 3

DWN	RAGHAVENDRA	20OCT10
CHK	ROHDE DANIEL	20OCT10
APVD	ROHDE DANIEL	20OCT10
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

TE Connectivity

NAME: TERMINAL, RING TONGUE SOLISTRAND STRATOTHERM 8 AWG, M10

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-134962	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV A2