
CUSTOMER DRAWING

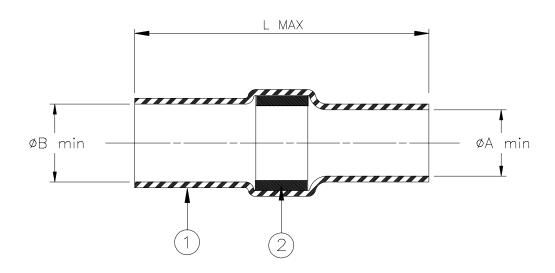

Product Name	Product Dimensions					
Froduct Name	L MAX	A min	B min			
D-110-41	27.6	2.7	3.2			
	(1.090)	(0.105)	(0.125)			

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyvinylidene fluoride, transparent blue.

2. SOLDER PREFORM WITH FLUX:

Solder: Sn63 Pb37 per ANSI J-STD-006.

Flux: ROL1 per ANSI-J-STD-004.

NOTES

- A. The parts covered by this drawing are for use in splicing tin or silver-plated solid conductors having a combined diameter between 1.27 (.050) and 2.54 (1.00) when twisted together.
- B. Parts will meet the requirements of Raychem Specification RT-1404 when installed properly. TEMPERATURE RATING: -55C to +150C.

Tyco Flectronics			Tyco Electronics 300 Constitution Dr Menlo Park, CA 94025, U.S.A.	TITLE: SOLDERSLEEVE DEVICE				
[Inches dimensions are shown in brackets] Devi			Raychem Devices	D-110-41				
TOLERANCES:	ANGLES: N/A	-	reserves the right to					
0.00 N/A	DOLLGIN EGG	amend this drawing at any time. Users should evaluate the suitability of the		REV:		DATE:		
0.0 N/A 0 N/A	ROUGHNESS IN MICRON	should evaluate the product for their a	•		A	26-Mar-08		
DRAWN BY:	CAGE CODE:	REPLACES:	ECO NUMBER:	SCALE:		SIZE:	SHEET:	
PTALLY	06090	D980623	08-007722		NTS	A	1 of 1	